


JUNCTION BOXES FOR IMMERSION HEATERS

Junction boxes are also available without holes for use in connecting heating elements, joining cables, etc.

Junction boxes type B - J are made of galvanized steel. In addition 2 junction boxes type B are also available in stainless steel AISI 304.


TYPE B - OVAL BOX



- IP55
- PG13.5

Item no.	Thread	Description
19905017	1½" RG	10mm cover
19905025	2" RG	10mm cover
19900554	1½" RG	stainless steel with 10mm cover
19900547	2" RG	stainless steel with 10mm cover
19905033	1½" RG	35mm cover
19905041	2" RG	35mm cover



TYPE B - RECTANGULAR BOX



- IP65
- M20
- 30mm cover

Item no.	Thread
19905058	1½" RG
19905066	2" RG



TYPE D - RECTANGULAR BOX



- IP44
- M20
- 3-pole thermofuse 110°C / +0 -10 K
- Manual reset - on the external reset button
- Switch: 3
- Contact rating: 20A / 400V

Item no.	Thread
19905090	1½" RG
19905108	2" RG


TYPE E - RECTANGULAR BOX





- IP22
- M20
- 3-pole operating thermostat 30-85°C / ± 3 K
- External knob
- Switch: 3
- Contact rating: 16A / 400 V

Item no.	Thread
19905116	1½" RG
19905124	2" RG

Continues on next page

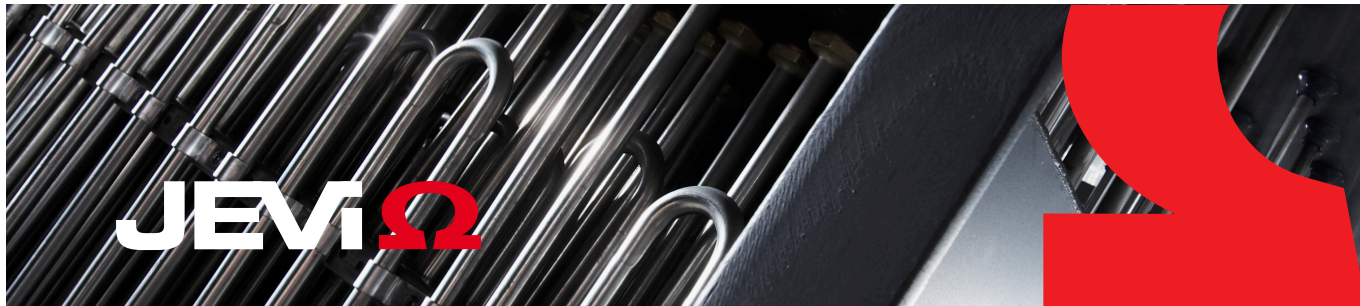



TYPE H - RECTANGULAR BOX WITH EXTERNAL KNOB



- IP22
- M20
- 3-pole operating thermostat $30-85^{\circ}\text{C} / \pm 3 \text{ K}$
- 3-pole thermofuse $110^{\circ}\text{C} / +0 -9 \text{ K}$
- Switch: 3
- Contact rating: 20A / 400 V

Item no.	Thread
19905199	1½" RG
19905207	2" RG



TYPE J - RECTANGULAR BOX WITH EXTERNAL KNOB



- IP22
- M20
- 3-pole operating thermostat $0-45^{\circ}\text{C} / \pm 2 \text{ K}$
- 3-pole thermofuse $76^{\circ}\text{C} / +0 -8 \text{ K}$
- Switch: 3
- Contact rating: 20A / 400 V

Item no.	Thread
19900216	1½" RG
19900265	2" RG



TYPE H - RECTANGULAR BOX WITH INSIDE SETTINGS



- IP65
- M20
- 3-pole operating thermostat $30-85^{\circ}\text{C} / \pm 3 \text{ K}$
- 3-pole thermofuse $110^{\circ}\text{C} / +0 -9 \text{ K}$
- Switch: 3
- Contact rating: 20A / 400 V

Item no.	Thread
19900489	1½" RG
19900471	2" RG

TYPE J - RECTANGULAR BOX WITH INSIDE SETTINGS



- IP65
- M20
- 3-pole operating thermostat $0-45^{\circ}\text{C} / \pm 2 \text{ K}$
- 3-pole thermofuse $76^{\circ}\text{C} / +0 -8 \text{ K}$
- Switch: 3
- Contact rating: 20A / 400 V

Item no.	Thread
19900083	1½" RG
19900067	2" RG


Continues on next page

Junction boxes type AR - MR are made of acid proof stainless steel AISI 316.

TYPE AR - ROUND BOX

- IP65
- M20


Item no.	Thread
19630050	1½" RG



TYPE BR - ROUND BOX

- IP65
- M20


Item no.	Thread
19630001	1½" RG
19630002	2" RG



TYPE DR - ROUND BOX

- IP65
- M20
- 3-pole thermofuse 110°C / +o -10 K
- Manual reset of thermofuse -by removing the lid
- Switch: 3
- Contact rating: 20A / 400V


Item no.	Thread
19630003	1½" RG
19630004	2" RG



TYPE NR - ROUND BOX

- IP65
- M16 + M20
- 1-pole thermofuse 113°C / +o -6 K
- Manual reset of thermofuse - by removing the lid
- Switch: 1
- Contact rating: 16A / 400V


Item no.	Thread
19630013	1½" RG
19630014	2" RG




TYPE OR - ROUND BOX

- IP65
- M16 + M20
- 1-pole thermofuse 120°C / +o -5 K
- Manual reset of thermofuse - by removing the lid
- Switch: 1
- Contact rating: 16A / 400V

Item no.	Thread
19630015	1½" RG
19630016	2" RG




Continues on next page

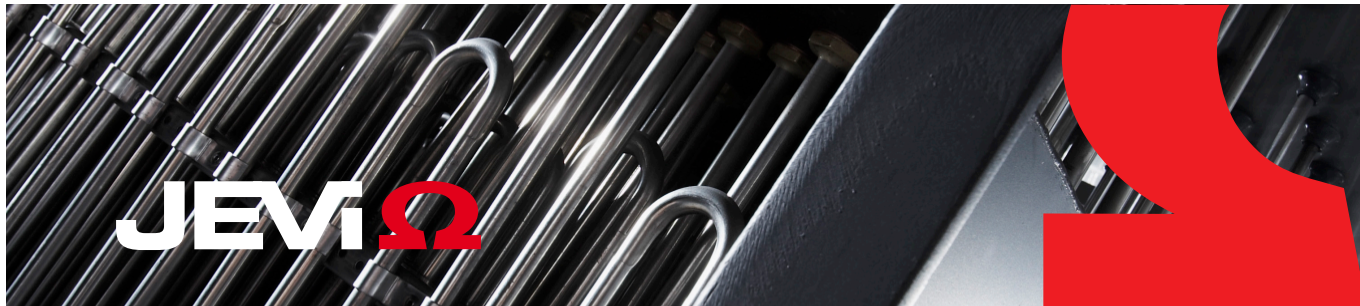

TYPE ER - ROUND BOX


- IP44
- M20
- 3-pole operating thermostat
- Switch: 3
- Contact rating: 16A / 400V



Item no.	Thread	Thermostat	Tolerance
19630005	1½" RG	30-85°C	± 3 K
19630006	2" RG	30-85°C	± 3 K
19630007	1½" RG	30-110°C	± 3 K
19630008	2" RG	30-110°C	± 3 K
19630009	1½" RG	0-40°C	± 2 K
19630010	2" RG	0-40°C	± 2 K

TYPE MR - ROUND BOX

- IP44
- M16 + M20
- 1-pole operating thermostat
- Switch: 1
- Contact rating: 16A / 400V



Item no..	Thread	Thermostat	Tolerance
19630017	1½" RG	30-85°C	± 3 K
19630018	2" RG	30-85°C	± 3 K
19630011	1½" RG	30-110°C	± 3 K
19630012	2" RG	30-110°C	± 3 K
19630019	1½" RG	0-40°C	± 2 K
19630020	2" RG	0-40°C	± 2 K