

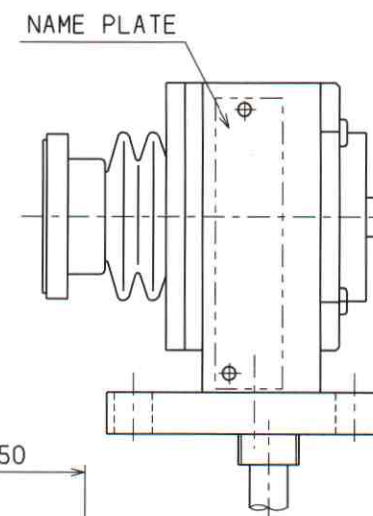
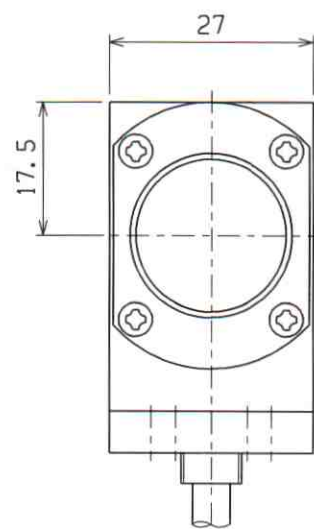
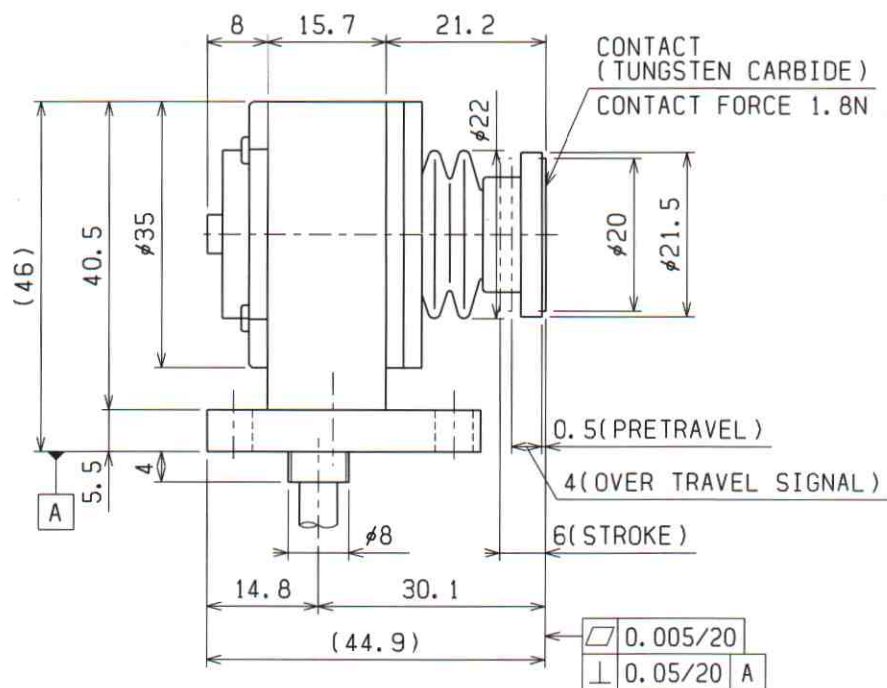


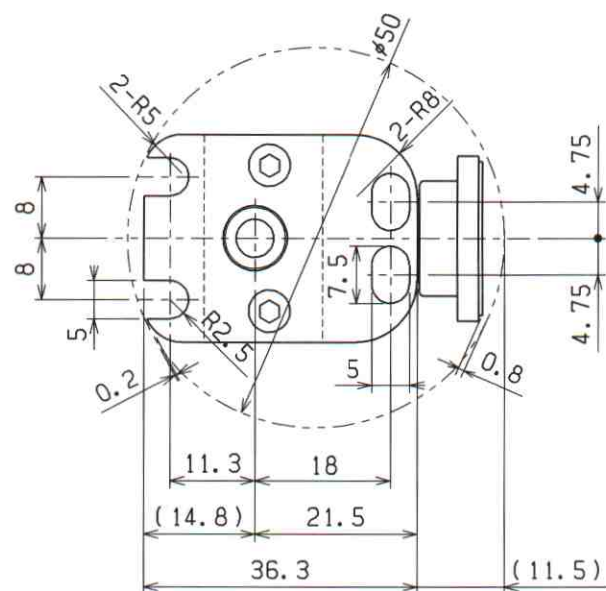


OIL RESISTANT CABLE 5m
 4 CORES $\phi 5$
 MINIMUM BENDING R7

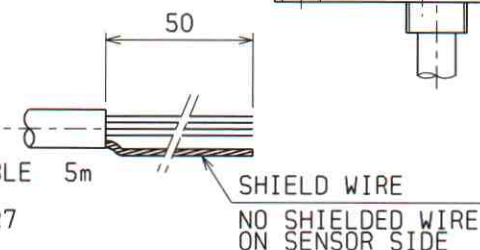

① SKIP SIGNAL

OPERATING MODE : NC(NORMALLY CLOSE)
 REPEATABILITY : 0.001mm
 RECOMMENDED OPERATING SPEED : 50~200mm/min
 CONTACT RATING : DC24V
 (Max. 10mA) STATIONARY CURRENT
 (Max. 20mA) INRUSH CURRENT

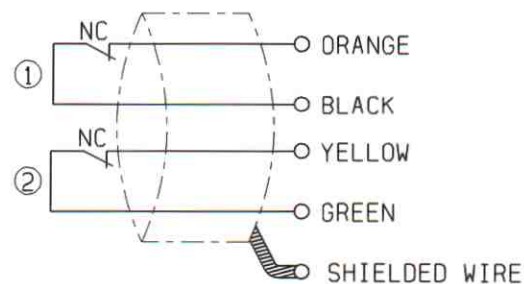

② OVER TRAVEL SIGNAL

MICRO SWITCH
 OPERATING MODE : NC(NORMALLY CLOSE)
 CONTACT RATING : DC30V 100mA
 (NON-INDUCTIVE LOAD)
 DEGREE OF PROTECTION : IEC IP67

ACCESSORY
 HEXAGONAL BOLT M4x12(SUS) 4EA

ASBESTOS IS NOT USED FOR THIS PRODUCT

CHK	DRA	A4
Kanno	18.01.17 SAITO	1:1

NAME	TOOL SETTER
DRAWING NUMBER	T25H-04-05
METROL LTD.	METROL