
ROBATECH

35A - ACA - DDDJ - 1JM / EQ09

MAIN FEATURES

- *3/2 universal valve*
- *Balanced poppet, immune to variations of pressure*
- *Short stroke with high flow*
- *The patented solenoid develops high shifting forces*
- *Solenoid turned 180°*
- *Powerful return spring*
- *Resistance to high temperatures*
- *Robatech exclusivity*
- *Special valve body with:*
  - *Robatech Logo*
  - *Robatech painting*
  - *24 mm thickness*

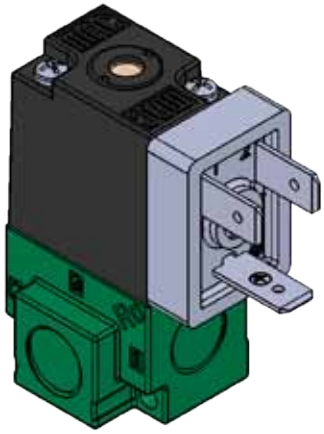

INSTALLATION SPECIFICATIONS

Function:	*3/2 way universal valve*
Fluid:	*Compressed air*
Pressure range:	*Vacuum to 8 bar / Vacuum to 120 PSI*
Air preparation:	✓ *Lubrication: Not required, if used, the aniline point of the oil must be between 80 and 100°C* ✓ *Filtration: Minimum 40 µm*
Ambient temperature:	*-18°C to +65°C / 0°F to 150°F*
Electrical:	✓ *Voltage: 24 VDC - 15% to +10% of nominal voltage* ✓ *Power: 7,3 W*

DIMENSIONS

