


SPECIFICATION DATA
MOYNO® 500 PUMPS
300 SERIES MOTORIZED
331, 332, 333, 344, 356 AND 367 MODELS

331, 332, 333, 344 MODELS

DIMENSIONS




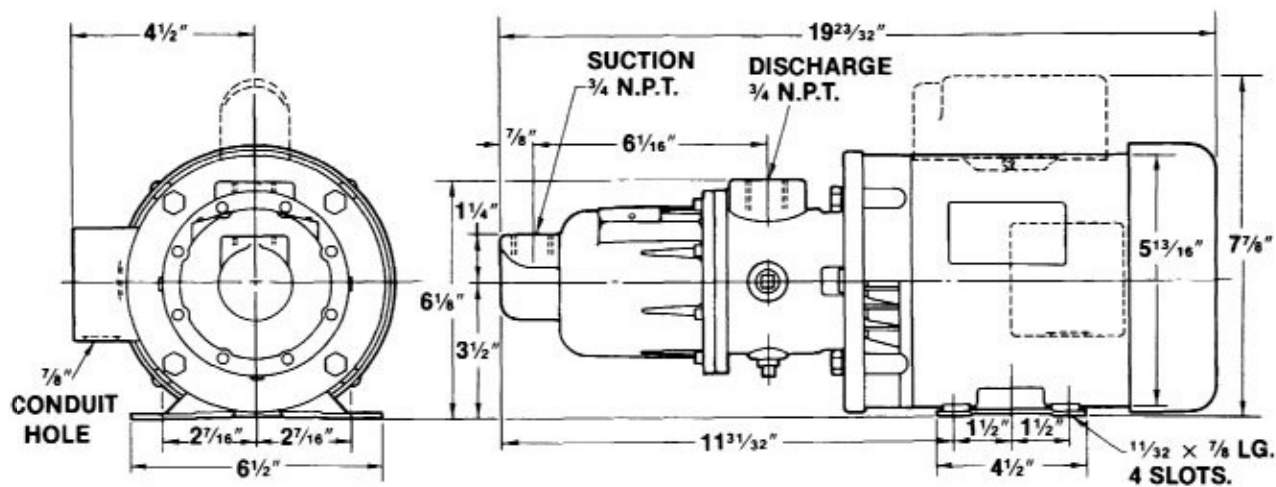


MATERIALS OF CONSTRUCTION

COMPONENT	MODELS			
	33159, 33259 33359, 34459	33160, 33260 33360, 34460	33152, 33252 33352, 34452	33150, 33250 33350, 34450
Housing	Cast iron	Cast iron	316SS	316SS
Rotor	416 SS/CP	416 SS/CP	316 SS/CP	316 SS/CP
Stator	NBR (Nitrile)	NBR (Nitrile)	NBR (Nitrile)	NBR (Nitrile)
Motor Data	1/2 HP, 1 PH	1/2 HP, 3 PH	1/2 HP, 1 PH	1/2 HP, 3 PH
	115/230 VAC	230/440 VAC	115/230 VAC	230/440 VAC
	60 HZ TEFC	60 HZ TEFC	60 HZ TEFC	60 HZ TEFC
Weight (lbs)	41	41	41	41

CP = Chrome plated

PERFORMANCE (Water at 70°F)

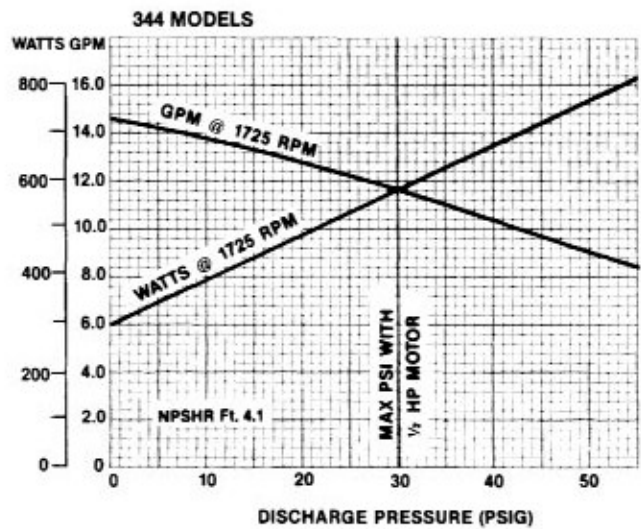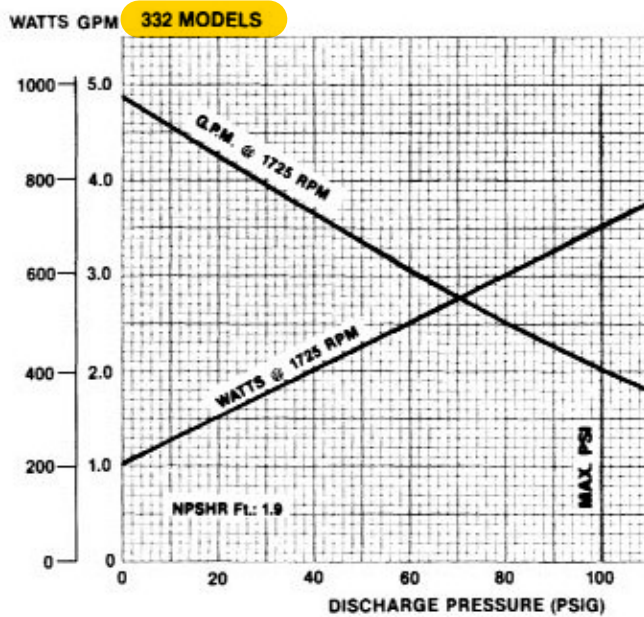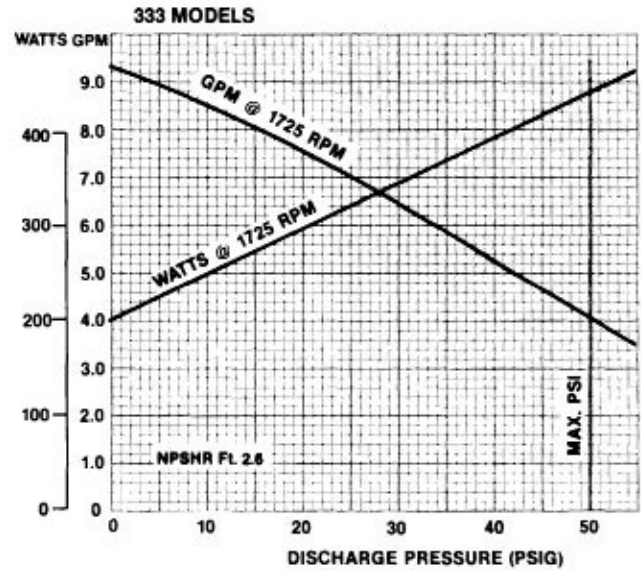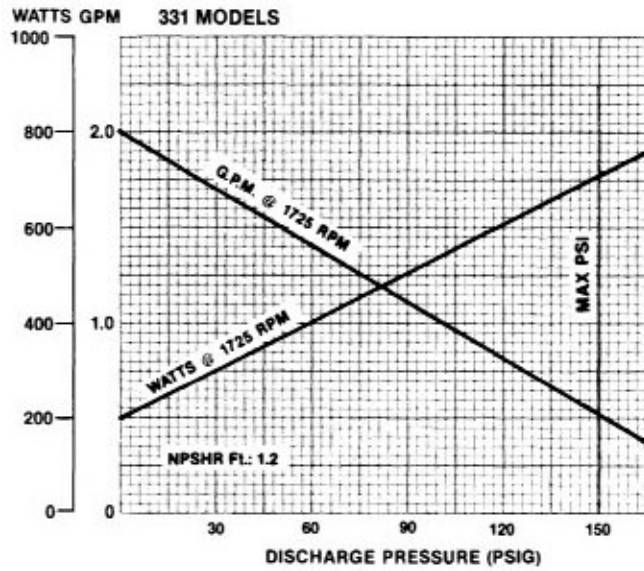

NOTE: With the standard 1/2 HP motor, maximum fluid viscosity is 100 CP (500 SSU).