


SL(F)-Twin solenoids proportional

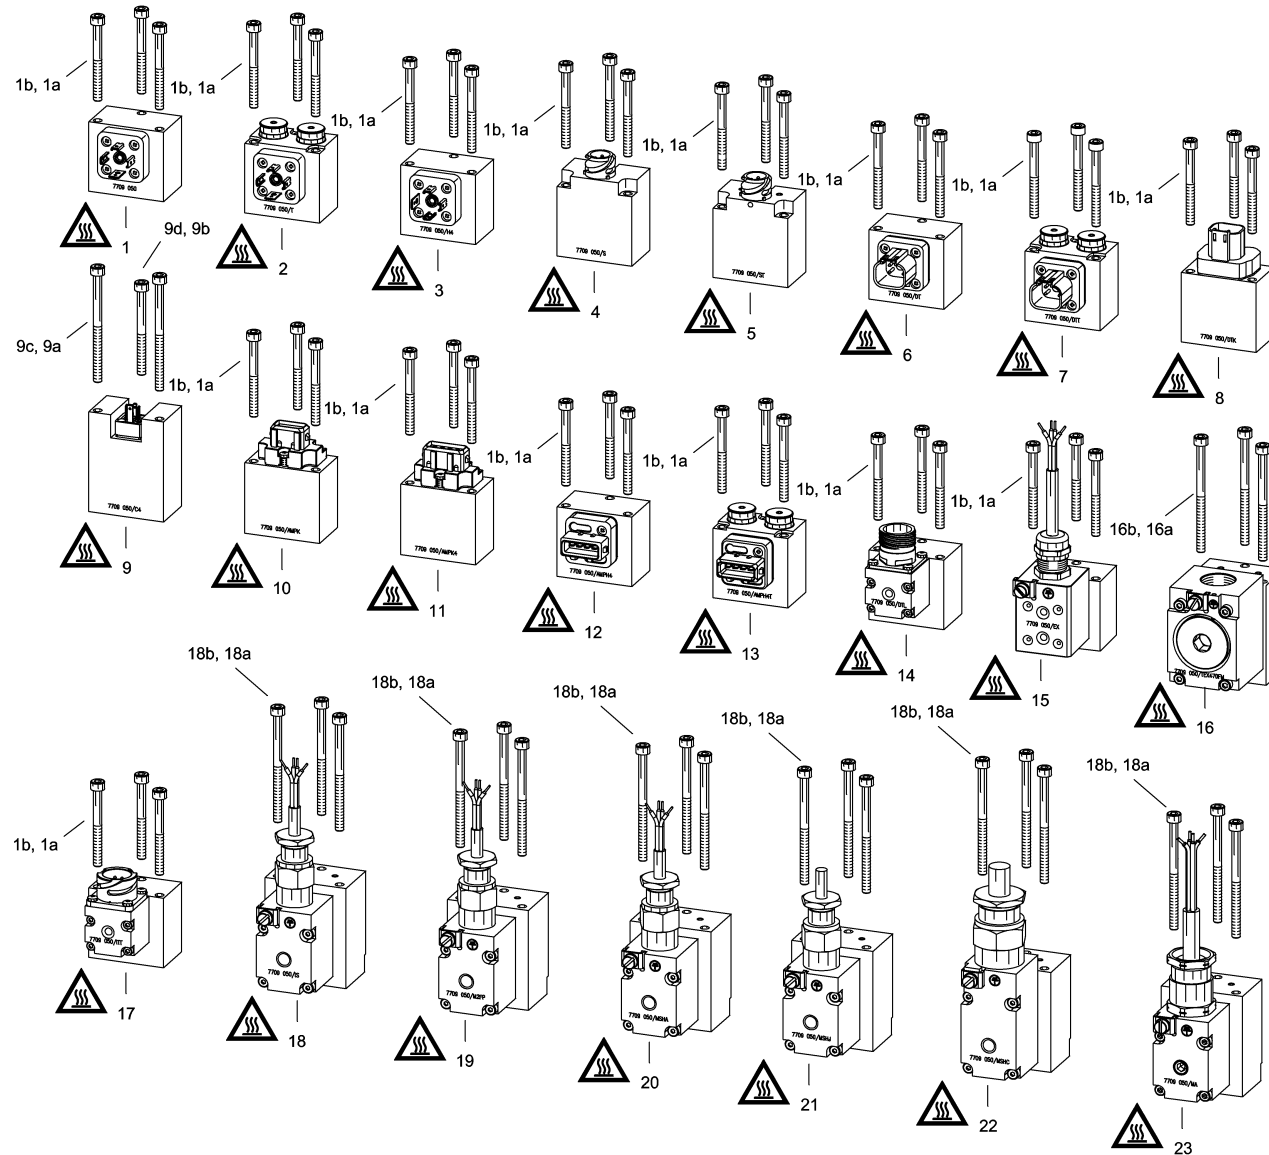

SL(F)-Twin solenoids proportional

Item No.	Qty.	Item	Nomenclature	Add. Information
4704 8599-00	1	1	TWIN SOLENOID PROP. -X 12	12V DC (7709 050/HS; 7709 050/MSM)
4704 8598-00	1	1	TWIN SOLENOID PROP. -X 24	24V DC (7709 050/HS; 7709 050/MSM)
4704 8121-00	1	1	TWIN SOLENOID PROP. -X 12 DS DEEP SEA EXECUTION	12V DC Deep sea version
4704 8101-00	1	1	TWIN SOLENOID PROP. -X 24 DS DEEP SEA EXECUTION	24V DC Deep sea version
6005 0424-00	3	1a	SKT.-HEAD SCREW ISO 4762 - M 5,00 x 50,00 -A2-70	tightening torque 5,5 Nm!
6005 0461-00	3	1b	SKT.-HEAD SCREW ISO 4762 - M 5,00 x 70,00 -A2-70	For vers. with twin solenoid spacer; tightening torque 5,5 Nm!
4704 8683-00	1	2	TWIN SOLENOID PROP. -X 12 T WITH MANUAL EMERGENCY ACTUATION	with emergency actuation; 12V DC (7709 050 B/HS)
4704 8684-00	1	2	TWIN SOLENOID PROP. -X 24 T WITH MANUAL EMERGENCY ACTUATION	with emergency actuation; 24V DC (7709 050 B/HS)
4704 8737-00	1	3	TWIN SOLENOID PROP. -X 24 H 4 WITHOUT EMERGENCY	24V DC (7709 050/HS4)
4704 8736-00	1	3	TWIN SOLENOID PROP. -X 12 H 4 WITHOUT EMERGENCY	12V DC (7709 050/HS4)
4704 8680-00	1	4	TWIN SOLENOID PROP. -S 24 WITH CONNECTOR CO.SCHLEMMER	24V DC (7709 050/HSS)
4704 8679-00	1	4	TWIN SOLENOID PROP. -S12 WITH CONNECTOR CO.SCHLEMMER	12V DC (7709 050/HSS)
4704 8771-00	1	5	TWIN SOLENOID PROP. -S 12 T WITH CONNECTOR CO.SCHLEMMER AND EMERGENCY	12V DC (7709 050B/S)
4704 8770-00	1	5	TWIN SOLENOID PROP. -S 24 T WITH CONNECTOR CO.SCHLEMMER AND EMERGENCY	24V DC (7709 050B/S)
4704 4117-00	1	6	TWIN SOLENOID PROP. -DT 12 WITH PLUG CO. DEUTSCH	12V DC, Connection via plug Co. DEUTSCH DT 04-4P, suited for socket DT 06-4S
4704 4118-00	1	6	TWIN SOLENOID PROP. -DT 24 WITH PLUG CO. DEUTSCH	24V DC, Connection via plug Co. DEUTSCH DT 04-4P, suited for socket DT 06-4S
4704 5486-00	1	7	TWIN SOLENOID PROP. -DT 24 T WITH PLUG CO. DEUTSCH AND EMERGENCY	24V DC, Connection via plug Co. DEUTSCH DT 04-4P, suited for socket DT 06-4S
4704 5484-00	1	7	TWIN SOLENOID PROP. -DT 12 T WITH PLUG CO. DEUTSCH AND EMERGENCY	12V DC, Connection via plug Co. DEUTSCH DT 04-4P, suited for socket DT 06-4S
4704 8802-00	1	8	TWIN SOLENOID PROP. -DT12 K PLUG CO. DEUTSCH	12V DC Plug CO. Deutsch at the front;
4704 8803-00	1	8	TWIN SOLENOID PROP. -DT 24 K PLUG CO. DEUTSCH	24V DC Plug CO. Deutsch at the front;
4704 4088-00	1	9	TWIN SOLENOID PROP. -X 24 C4	24V DC (7709 050A/H4)
4704 4087-00	1	9	TWIN SOLENOID PROP. -X 12 C4	12V DC (7709 050A/H4)
6005 0461-00	2	9a	SKT.-HEAD SCREW ISO 4762 - M 5,00 x 70,00 -A2-70	tightening torque 5,5 Nm!
6005 0457-00	1	9b	SKT.-HEAD SCREW ISO 4762 - M 5,00 x 55,00 -A2-70	tightening torque 5,5 Nm!
6005 0099-00	2	9c	SKT.-HEAD SCREW ISO 4762 - M 5,00 x 90,00 -A2-70	For vers. with twin solenoid spacer; tightening torque 5,5 Nm!
6005 0252-00	1	9d	SKT.-HEAD SCREW ISO 4762 - M 5,00 x 75,00 -8.8 A2K	For vers. with twin solenoid spacer; tightening torque 5,5 Nm!
4704 4633-00	1	10	TWIN SOLENOID PROP. -AMP 12 K	12V DC

SL(F)-Twin solenoids proportional

Item No.	Qty.	Item	Nomenclature	Add. Information
4704 4625-00	1	10	TWIN SOLENOID PROP. -AMP 24 K	24V DC
4704 4631-00	1	11	TWIN SOLENOID PROP. -AMP 12 K 4	12V DC (7709 050A/AMP4H)
4704 4624-00	1	11	TWIN SOLENOID PROP. -AMP 24 K 4	24V DC (7709 050A/AMP4H)
4704 4636-00	1	12	TWIN SOLENOID PROP. -AMP 24 H 4	24V DC
4704 4640-00	1	12	TWIN SOLENOID PROP. -AMP 12 H 4	12V DC
4704 8342-00	1	13	TWIN SOLENOID PROP. -AMP 24 H 4 T WITH EMERGENCY	24V DC with emergency actuation
4704 9081-00	1	13	TWIN SOLENOID PROP. -AMP 12 H 4 T WITH EMERGENCY	12V DC with emergency actuation
4704 8113-00	1	14	TWIN SOLENOID PROP. -DTL 24	24V DC
4704 8112-00	1	14	TWIN SOLENOID PROP. -DTL 12	12V DC
4704 4161-00	1	15	TWIN SOLENOID PROP. -G 24 EX-10 M	24V DC; Please follow the operation manual B ATEX B01/2022!
4704 4162-00	1	15	TWIN SOLENOID PROP. -G 24 EX-3 M	24V DC; Please follow the operation manual B ATEX B01/2022!
4704 4081-00	1	16	TWIN SOLENOID PROP. -X 24 TEX 4 70 FM MANUAL EMERGENCY ACTUATION WITHOUT CABLE WITH TERMINAL BOX	24V DC; Please follow the operation manual B ATEX; B41/2017,with emergency actuation; without cable, cable kit may be ordered separately (see B ATEX)
6005 0461-00	2	16a	SKT.-HEAD SCREW ISO 4762 - M 5,00 x 70,00 -A2-70	tightening torque 5,5 Nm!
6005 0099-00	2	16b	SKT.-HEAD SCREW ISO 4762 - M 5,00 x 90,00 -A2-70	For vers. with twin solenoid spacer; tightening torque 5,5 Nm!
4704 8781-00	1	17	TWIN SOLENOID PROP. -ITT 24-CANNON	24V DC
4704 8798-00	1	17	TWIN SOLENOID PROP. -ITT 12-CANNON	12V DC
4704 4048-00	1	18	TWIN SOLENOID PROP. -G 12 IS - 5 M	12V DC; Please follow the operation manual B ATEX; B17/2011 and B18/2011! (7709 050/1 B EXI-SCH)
4704 4049-00	1	18	TWIN SOLENOID PROP. -G 12 IS - 10 M	12V DC; Please follow the operation manual B ATEX; B17/2011 and B18/2011! (7709 050/1 B EXI-SCH)
6005 0461-00	3	18a	SKT.-HEAD SCREW ISO 4762 - M 5,00 x 70,00 -A2-70	tightening torque 5,5 Nm!
6005 0099-00	3	18b	SKT.-HEAD SCREW ISO 4762 - M 5,00 x 90,00 -A2-70	For vers. with twin solenoid spacer; tightening torque 5,5 Nm!
4704 4071-00	1	19	TWIN SOLENOID PROP: -G 24 M2FP-3 M AUSTRALIA	24V DC; Please follow the operation manual B ATEX; B04/2005 and B11/2009!
4704 4150-00	1	19	TWIN SOLENOID PROP. -G 24 M2FP-10 M AUSTRALIA	24V DC; Please follow the operation manual B ATEX; B04/2005 and B11/2009!
4704 9028-00	1	20	TWIN SOLENOID PROP. -G 24 MSHA-3 M	24V DC; Please follow the operation manual B ATEX; B04/2005; B05/2006 and B11/2009! (7709 050 B MSHA)
4704 9033-00	1	20	TWIN SOLENOID PROP. -G 24 MSHA-10 M	24V DC; Please follow the operation manual B ATEX; B04/2005; B05/2006 and B11/2009! (7709 050 B MSHA)
4704 9042-00	1	20	TWIN SOLENOID PROP. -G 24 MSHA-20 M	24V DC; Please follow the operation manual B ATEX; B04/2005; B05/2006 and B11/2009! (7709 050 B MSHA)
4704 9036-00	1	21	TWIN SOLENOID PROP. -G 24 MSHJ WITH JOY-PLUG	24V DC; Please follow the operation manual B ATEX; B04/2005; B05/2006 and B11/2009! (7709 050 B MSHJ)

SL(F)-Twin solenoids proportional

Item No.	Qty.	Item	Nomenclature	Add. Information
4704 4650-00	1	22	TWIN SOLENOID PROP. -G 24 MSHC-0,35 M	24V DC; Please follow the operation manual B ATEX; B04/2005; B05/2006 and B11/2009!
4704 4651-00	1	22	TWIN SOLENOID PROP. -G 24 MSHC-0,65 M	24V DC; Please follow the operation manual B ATEX; B04/2005; B05/2006 and B11/2009!
4704 8504-00	1	23	TWIN SOLENOID PROP. -G 24 MA-3 M	MA-Classification
4704 8505-00	1	23	TWIN SOLENOID PROP. -G 24 MA-10 M	MA-Classification
4704 8506-00	1	23	TWIN SOLENOID PROP. -G 24 MA-20 M	MA-Classification