


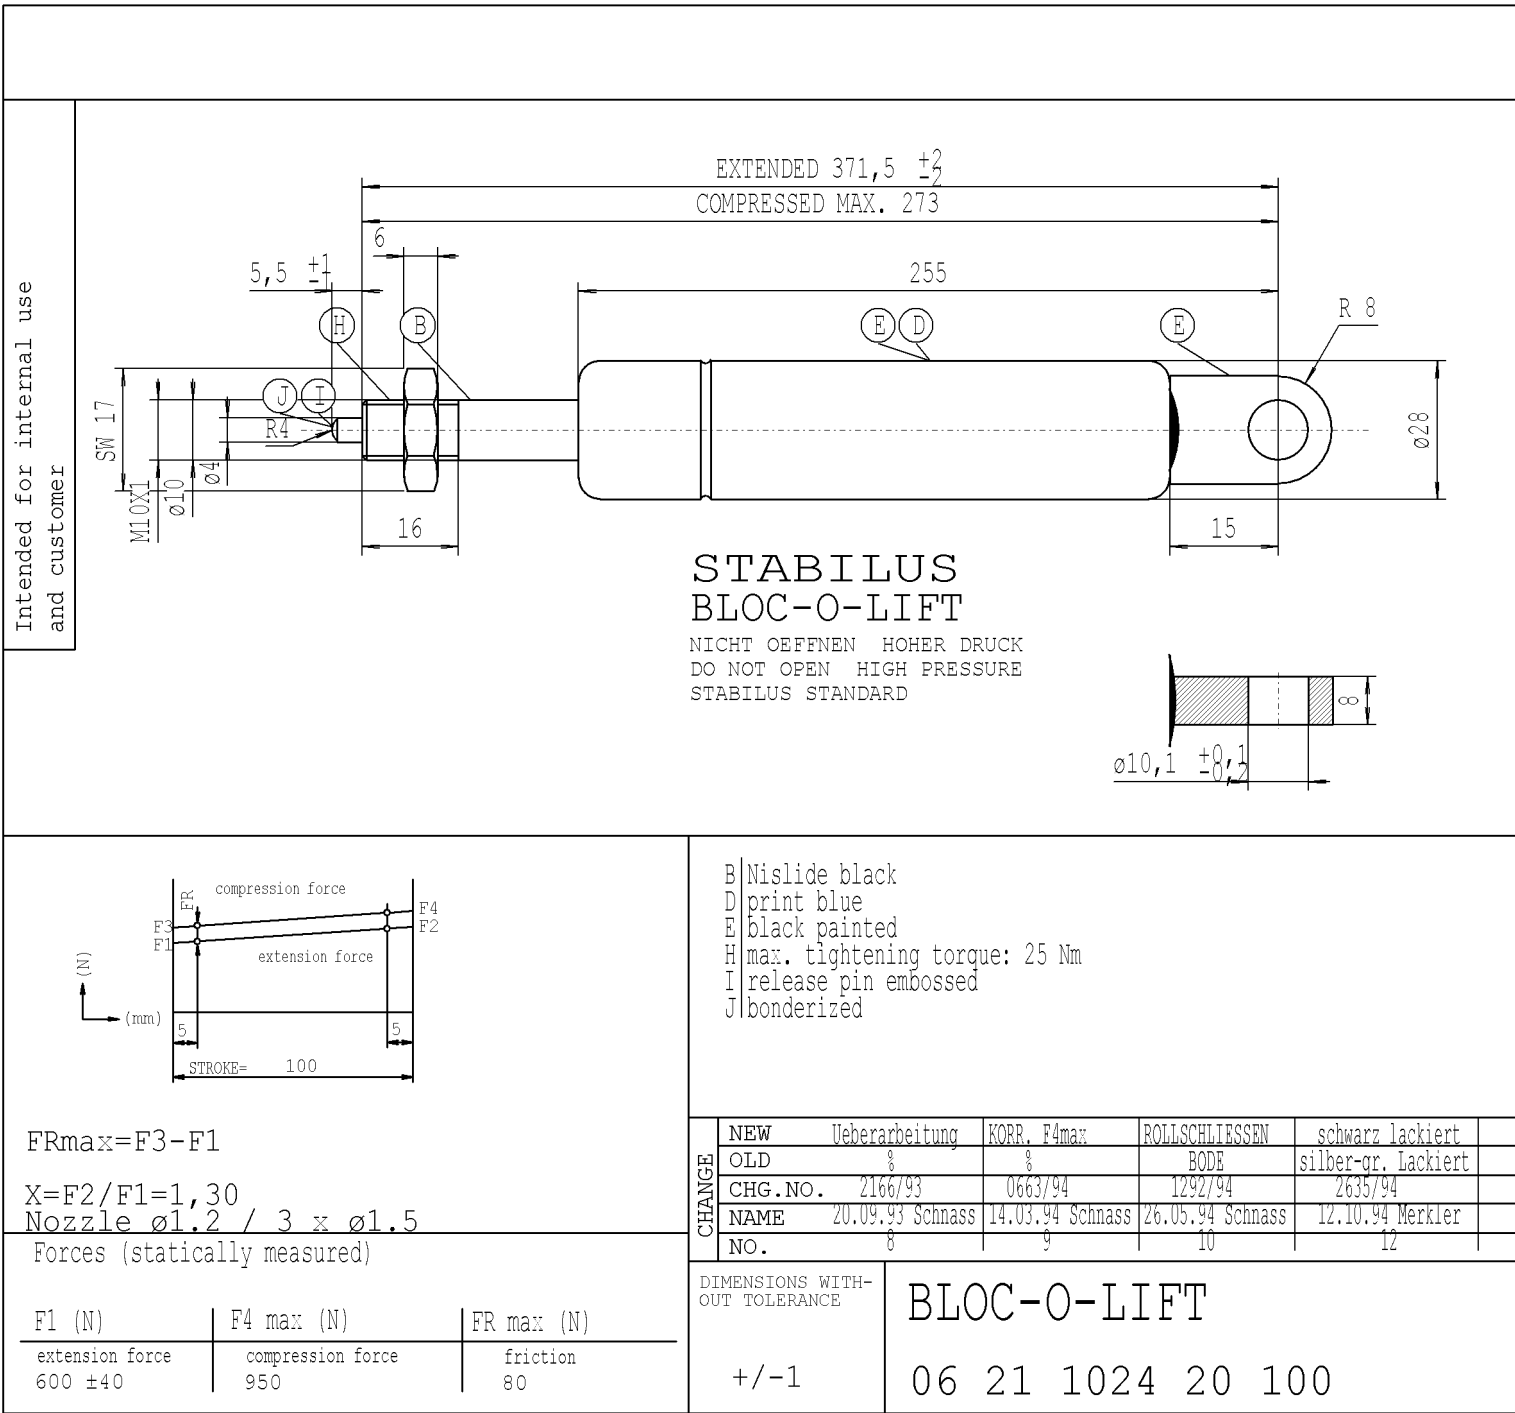

We reserve all rights to this drawing, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this drawing is not permitted without the written consent of STABILUS.

- Compression and extension forces measured acc. to STAB-Spec. 10009033
- The warning label must not be removed or obscured.
- Spring test with piston rod downwards
- Protect piston rod from dirt, paint and damage
- Disposal acc. to STAB-Spec.10009375
- Drawing not true-to-scale
- Locking force at +20° C in extension 6000 N in compression 3000 N
- release-force of valve acc. to STAB-Spec. 10005233
- Observe installation instructions according to STAB-Spec. 10005593
- Permissible operating temperature range -30°C to +80°C
- To release: press dia. pin by min. 2.5 mm
- Locking: release the pin completely
- the Gas Spring must not be mechanically modified or damaged.
- Installation: position any as required
- Press release max. 6.0 mm

Unregistered Copy

Print-out is not subject to the modification service

STABILUS

Modifications in favour of technical process reserved

DRAWING		CHECKED	
DATE	11.12.1992	NAME	A.Binder
Document No. 10001240			

167606

E