
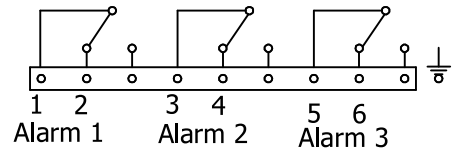


NOTICE
THIS DRAWING IS THE PROPERTY OF QUALITROL CORPORATION AND IS LOANED ONLY ON THE CONDITION THAT IT WILL BE USED TO FACILITATE THE PURPOSE FOR WHICH INTENDED AND NOT BE REPRODUCED, COPIED OR OTHERWISE DISPOSED OF, AND IS NOT TO BE USED IN WHOLE OR PART FOR FURNISHING INFORMATION RELATIVE TO THE MAKING OF DRAWINGS, PARTS APPARATUS OR PARTS THEREOF, EXCEPT BY WRITTEN ORDER FROM QUALITROL CORPORATION.

MODEL NO.

38920-3

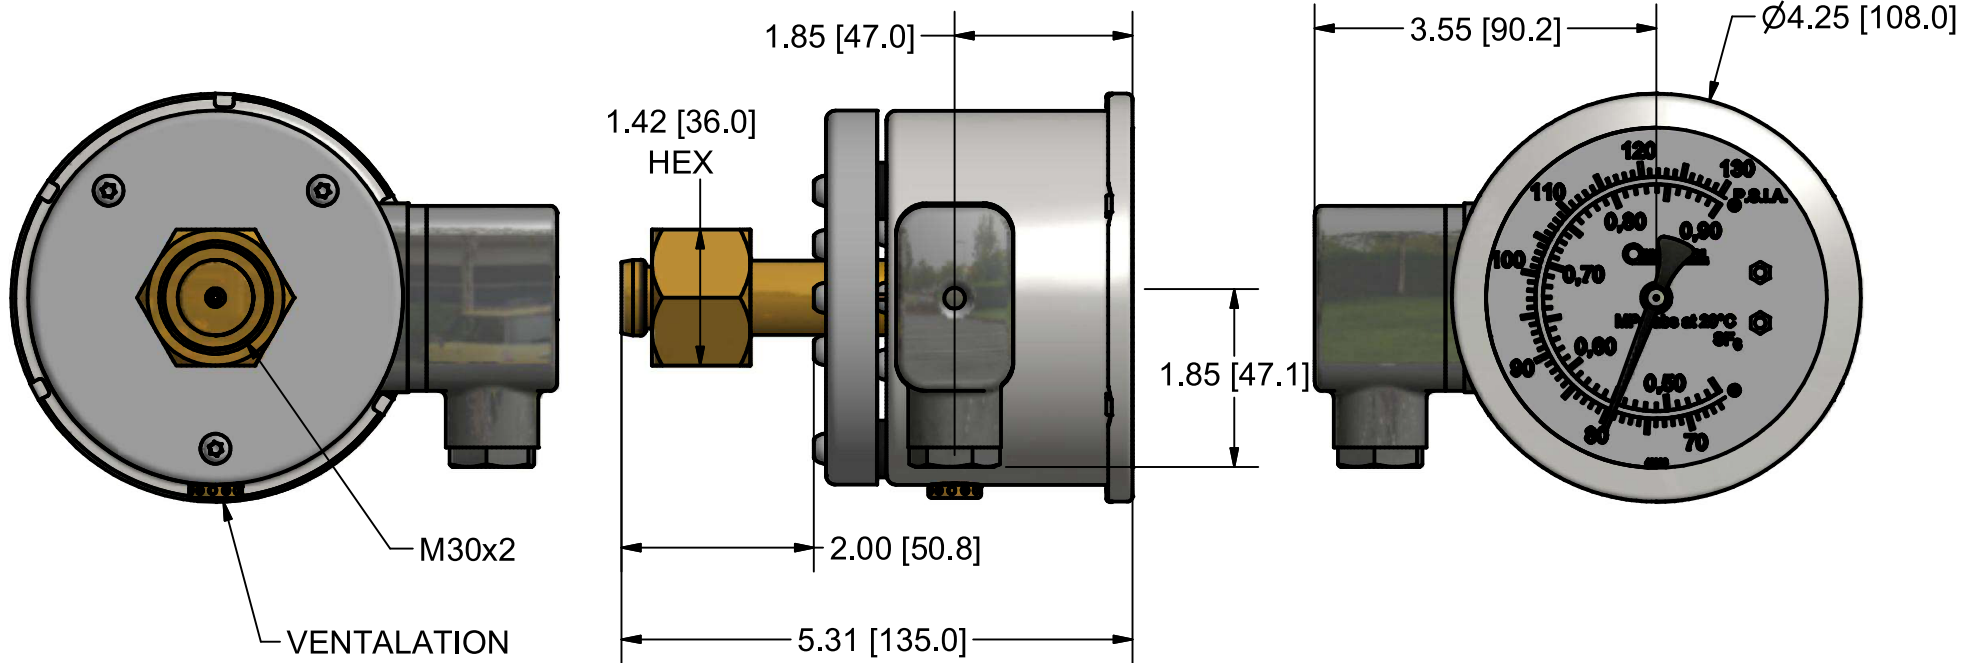

The contacts close when the density drops.
Contacts shown in non pressurized state.

MAX. SWITCH CAPACITY 125 VAC 3 A
125 VDC 0.4 A
PROTECTION CLASS IP54
CASE CONSTRUCTION: STAINLESS STEEL
LENS: POLYCARBONATE UV STABILIZED

Compensation Volume cm ³ /g	Scale Range MPa abs	Alarm 1 MPa abs	Alarm 2 MPa abs	Alarm 3 MPa abs
21.8	0.45-0.90 66-130 psi abs	0.62	0.60	0.60

specific volume for compensation at 20° centigrade and 1000 mbar

1 OF 3
SHEETS 2 AND ABOVE FOR INTERNAL
USE ONLY.

LET	DATE	ALTERATION	C.N.
-	11-19-13	SH.2: 20756 was 20256; ELE-803-1 was 38923-3	31931
-	1-27-11	RELEASE (B50)	28872

QUALITROL

DIMENSIONS AND TOLERANCES IN
ACCORDANCE WITH ASME Y14.5M-1994

PH. (585) 586-1515
FAX (585) 377-0220

1385 FAIRPORT ROAD
FAIRPORT, NY 14450

FORM 0-473 REV.D 10/22/02

TITLE:

DENSITY MONITOR

MODEL NO.

38920-3