


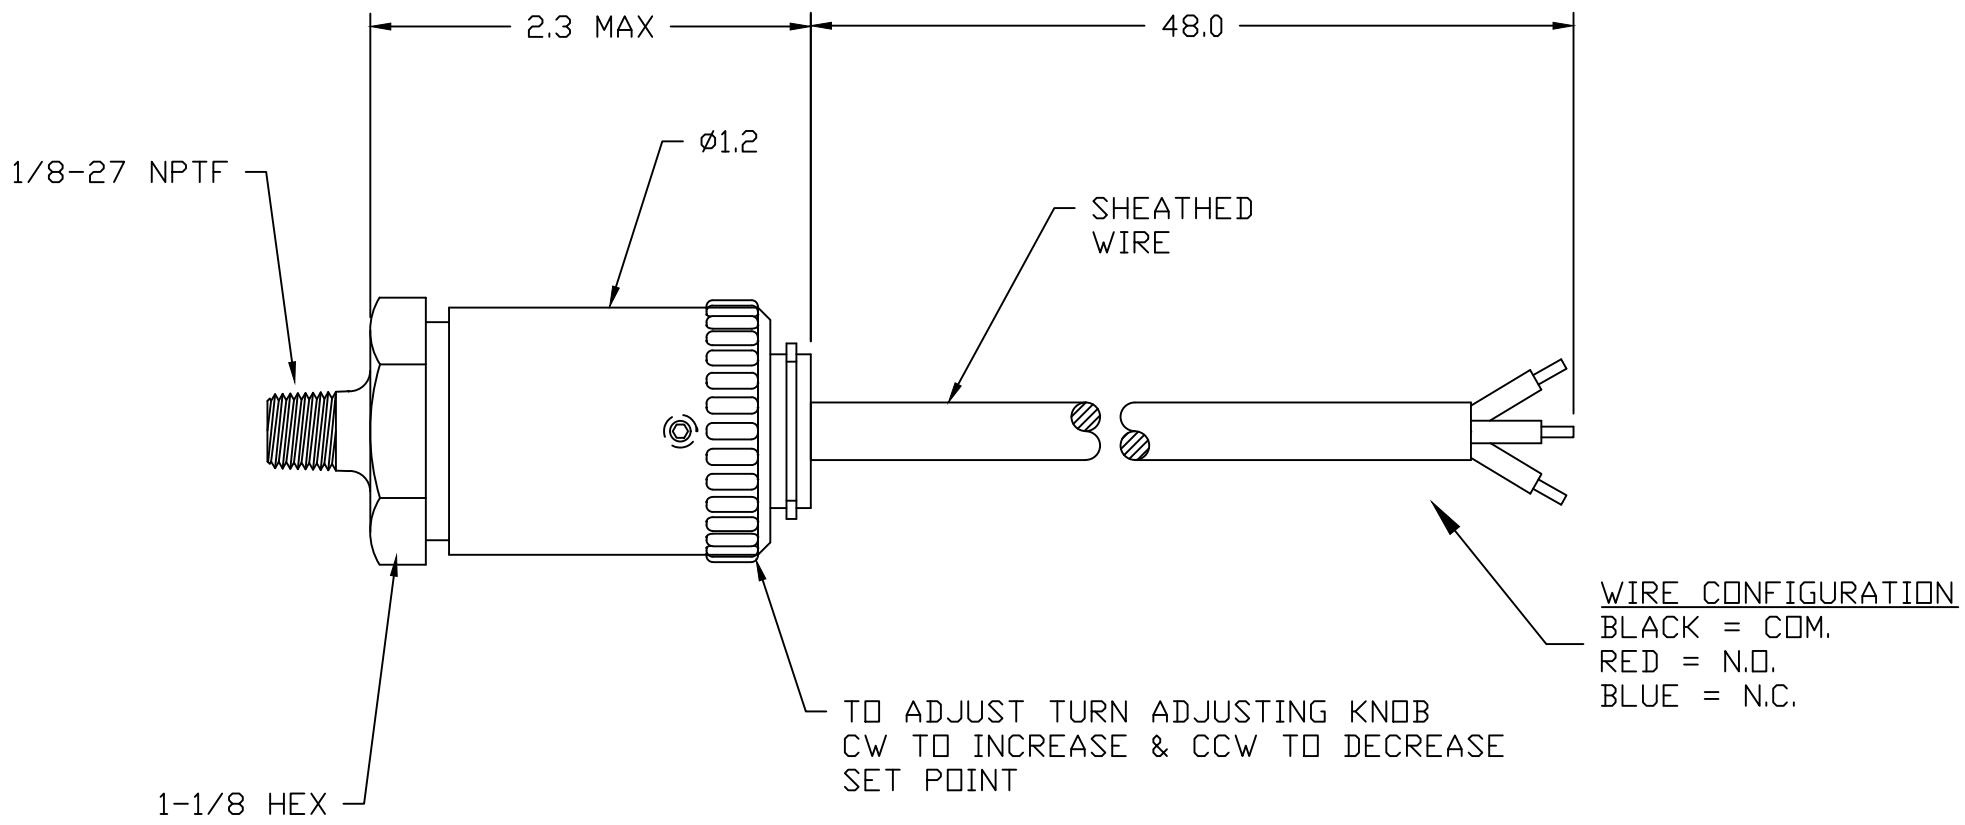

CIRCUIT: SPDT (SINGLE POLE DOUBLE THROW)
 TERMINATION: (3) 18 AWG WIRE LEADS SHEATHED.
 RATING: 3 AMP @ 120VAC
 OPERATION: CIRCUIT TO TRANSFER AT 16 ±1 PSI
 FALLING PRESSURE.

ADJUSTING RANGE: 10 TO 100 PSI.
 MAX H₂O TEMPERATURE: 300°F
 MAX AMBIENT TEMPERATURE: 180°F
 MAX OPERATING PRESSURE: 600 PSI
 NEMA 4
 MATERIALS:

BASE- BRASS
 SWITCH HOUSING- G/F NYLON
 ADJUSTING KNOB - G/F NYLON
 DIAPHRAGM- ETHYLENE PROPYLENE

NASON P.O. BOX 505 WEST UNION, SC 29696 Ph: (864)638-9521 Fax: (864)638-7903			
CUSTOMER ACS		DATE 3/28/22	DRAWN BY JDC
REFERENCE AREA		SCALE 1 : 1	APPROVED BY
TITLE PRESSURE SWITCH MODEL CJ		CHANGE ON CAD ONLY. DRAWING NUMBER CJ-U2C-16G/WL116	