

TE-KO WATER TEMPERATURE CONTROLLERS SKY VERSION

TWK 0 S ÷ TWK 12 S



Technical features


Model	Fluid	Capacity		Function	Temp. max		Cooling	Heating power		Cooling power		Δt*		Pump						Users connection N°	Electrical power	
		l	gal _{UK}		°C	°F		kW	HP	kW	HP	°C	°F	kW	HP	l/min	gal/min	bar	psi		kW	HP
TWK 0 S	Water	0,5	0,11	Pressure	90	194	Indirect	0,60	0,8	2,5	3,4	70	158	0,06	0,08	0÷3,5	0÷0,92	6÷0	87÷0	1	0,70	0,94
TWK 3 S	Water	5	1,10	Pressure / Vacuum	95	203	Indirect	3	4,0	15	20,1	75	167	0,5	0,67	0÷25	0÷6,60	3,3÷0	48÷0	1	3,5	4,7
TWK 6 S	Water	12	2,68	Pressure / Vacuum	95	203	Indirect	6	8,0	35	46,9	75	167	0,5	0,67	0÷40	0÷10,57	3,5÷0	51÷0	1÷4	6,5	8,7
TWK 9 S	Water	12	2,68	Pressure / Vacuum	95	203	Indirect	9	12,1	35	46,9	75	167	1,0	1,34	0÷60	0÷15,85	5,2÷0	75÷0	1÷4	10,1	13,5
TWK 12 S	Water	16	3,50	Pressure / Vacuum	95	203	Indirect	12	16,1	45	60,3	65	149	1,0	1,34	0÷60	0÷15,85	5,2÷0	75÷0	1÷4	13,1	17,6

Standard power supply: 400V/3ph/50Hz.

* between process fluid and cooling water

TE-KO WATER TEMPERATURE CONTROLLERS SKY VERSION

TWK 0 S ÷ TWK 12 S

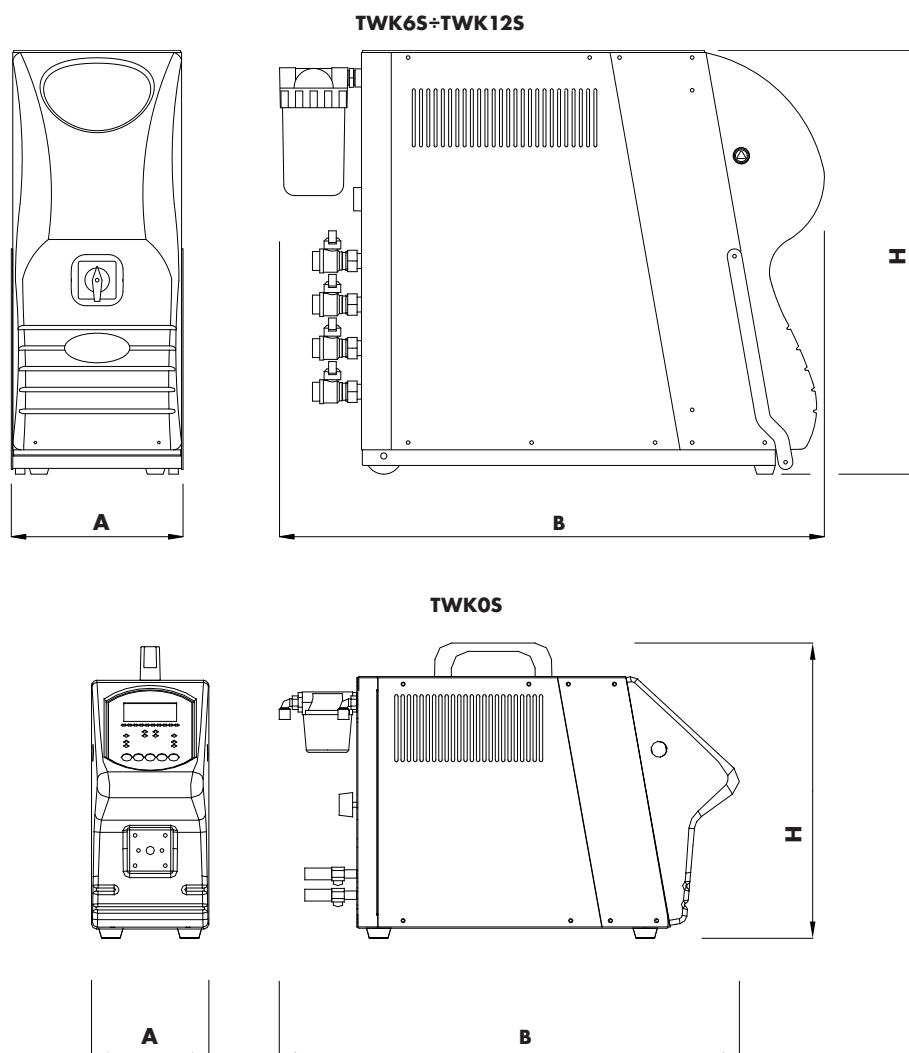

Dimensions

Model	A		B		H		Hydraulic connections		Weight	
	mm	in	mm	in	mm	in	Cooling	Load	kg	lb
TWK 0 S	140	5,51	550	21,70	350	13,78	6 mm / 0,24 in	6 mm / 0,24 in	16	35,3
TWK 3 S	231	9,1	588	23,1	469	18,5	1/2" F	1/2" F	34	75,0
TWK 6 S	237	9,3	750	29,5	584	23,0	1/2" F	1/2" F	46	101,4
TWK 9 S	237	9,3	750	29,5	584	23,0	1/2" F	1/2" F	51	112,4
TWK 12 S	260	10,2	860	33,9	665	26,2	1/2" F	1/2" F	59	130,0