


MERCOTAC 435 / 435-SS

CELCO PROFIL Srl Vigonovo (VE) - Italy
Tel. +39 0499800211 Fax. +39 0499800255

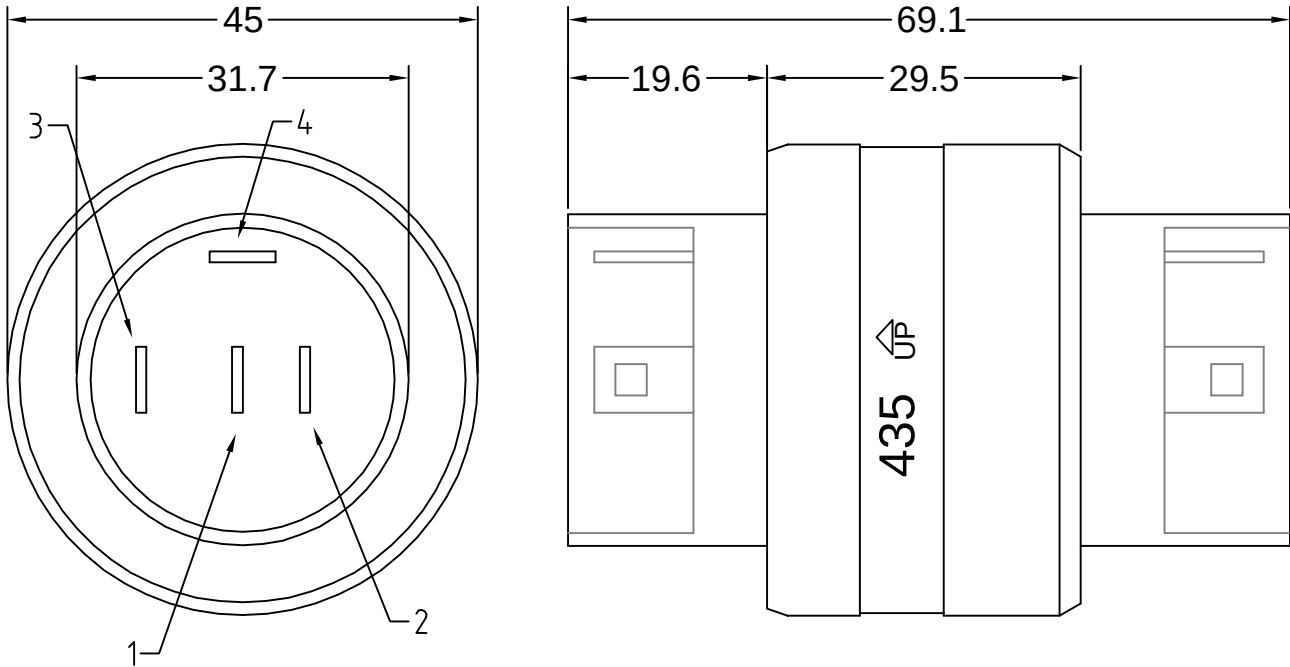


MODELLO-MODEL		435
CANALI CONDUCTOR	N.	4
PORTATA CURRENT CAPACITY	A	4x30
TENSIONE VOLTAGE RANGE	V (AC/DC)	0-500
MASSIMA FREQUENZA MAX FREQ.	MHz	100
RESISTENZA SERIE CONTACT RESIST.	m ohm	< 1
MAX VELOCITA' MAX SPEED	rpm	300
MAX/MIN TEMP (sul corpo) MAX/MIN OPERATING TEMP. (body)	°C	60 / -29
TIPICA COPPIA ROTAZIONE ROTATION TORQUE	gr-cm	850
RESISTENZA ISOLAMENTO CIRCUIT SEPARATION RESIST.	M ohm	> 50


-SS modello con
cuscinetto in acciaio
inox

-SS model with
stainless steel ball
bearing



Conessioni include
Disconnects included
55250 x 4 pcs
55251 x 4 pcs

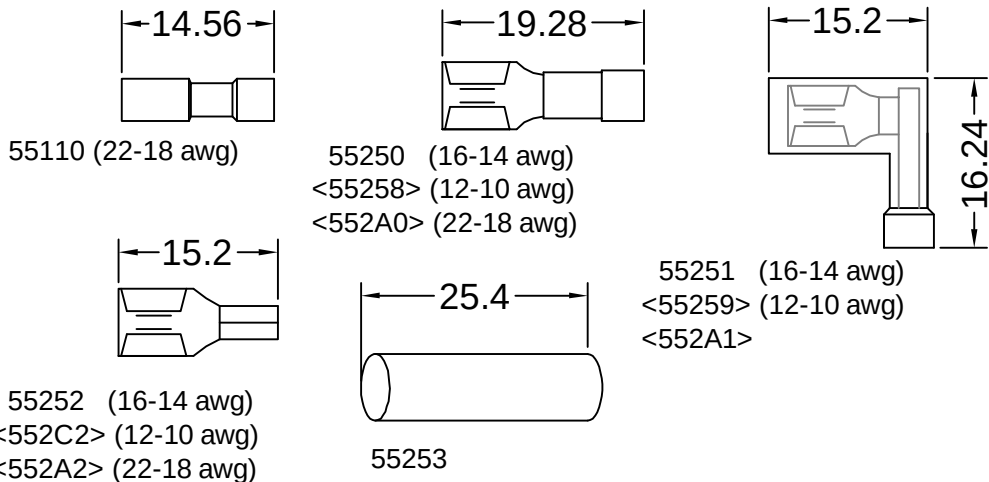

CONNESSIONI OPZIONALI - OPTIONAL DISCONNECTS

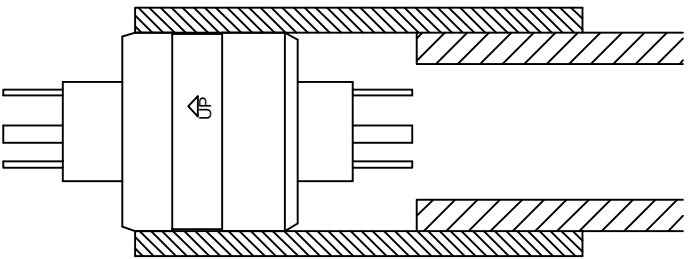

MONTAGGIO SUL CORPO
MOUNT BY BODY

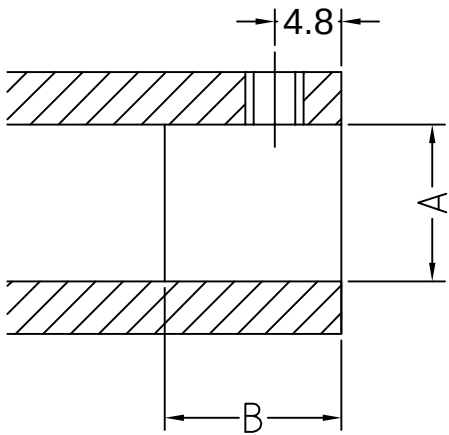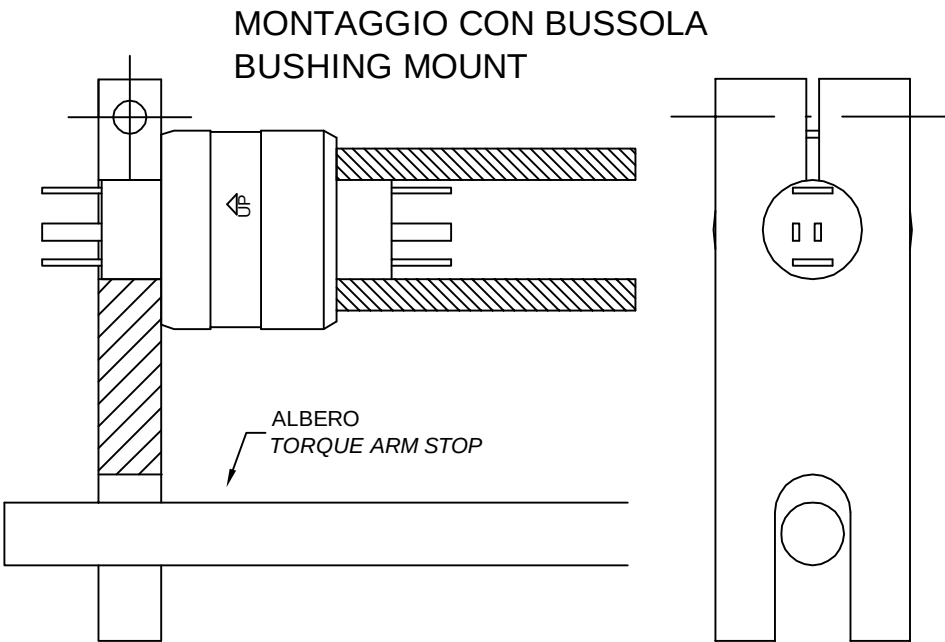

Bussola Bushing		Corpo Body	
A	B	A	B
31.75	20.3	45.01	20.03

ESEMPI DI MONTAGGIO

