20162239

THREE-PIECE BALL VALVES
Standard execution - 350 BA series

FIGURE:

Fig. 353 BA IIT: SW in acc. with ANSI B16.25 & DIN 3239 part 1




CHARACTERISTICS:


- Full bore
- Locking device
- Mounting flange in accordance with ISO 5211
- Anti-blow out stem
- Chevron packing
- DIN 50.049.3.1.B certificate available on request
- CE approval

MATERIALS:

N°	Description	Qty	Material
1	Body	1	ASTM A 351 CF8M
2	Seat	2	PTFE/RTFE
3	Cap	2	ASTM A351 CF8M
4	Ball	1	CF8M / 1.4408
5	Stem	1	Stainless steel AISI 316
6	Bolt nut (*)	4	Stainless steel AISI 304
7	Bolt washer (*)	4	Stainless steel AISI 304
8	Gland	1	Stainless steel AISI 304
9	Stem packing	1	PTFE/RTFE
10	Thrust washer	1	PTFE
11	Bolt	4	Stainless steel AISI 304
12	Joint gasket	2	PTFE

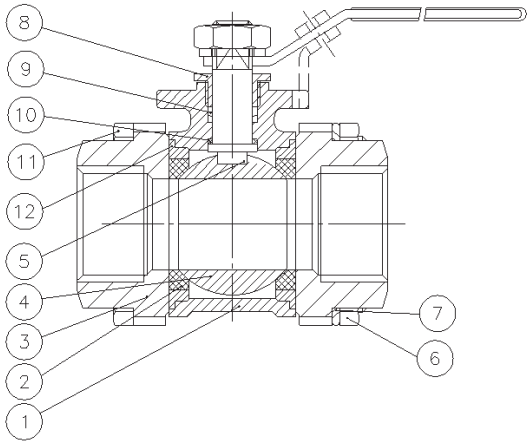


*: 6 pcs



PRESSURE RANGE:


1000 PSI - PN 64

PRESSURE-TEMPERATURE DIAGRAM

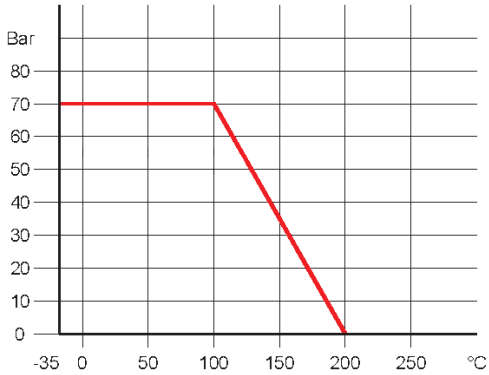

TORQUE - KV- VALUE

DN	Ø	Nm	Cv	Kv
20	3/4"	8	32	28

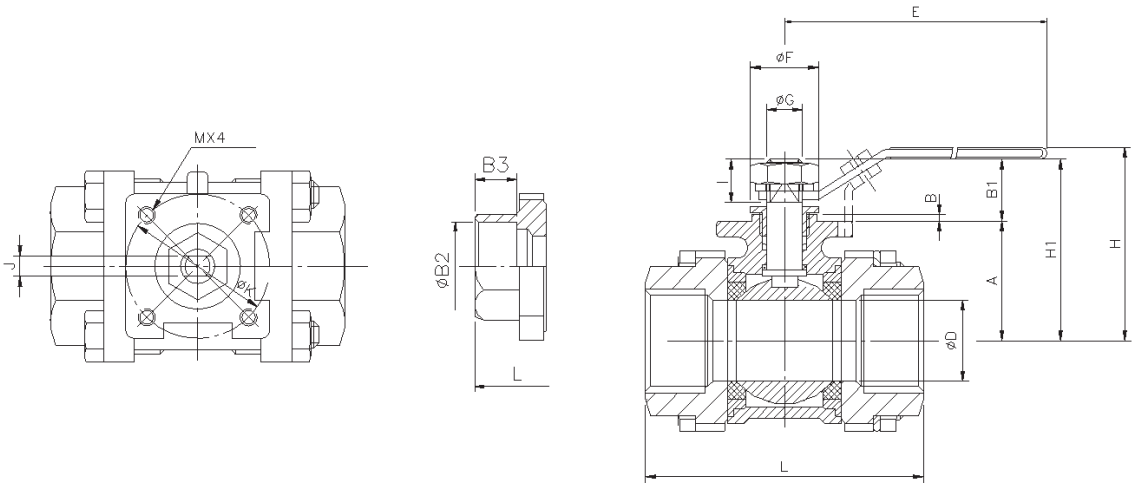

DIMENSIONS AND WEIGHT: (dimensions in mm.)

Diam.	ØD	B	B1	ØB2	B3	A	E	ØF	ØG	H	H1	I	J	ØK	L	M	Nm	Kg.	ISO
3/4"	20	2	20,5	27,3	13	33	130	25	9,5	68	53,5	11,5	6,5	36	76,2	M5	5	0,75	F03

