
20136442

THREE-PIECE BALL VALVES
Standard execution - 350 BA series

FIGURE:

Fig. 353 BA IIT: SW in acc. with ANSI B16.25 & DIN 3239 part 1

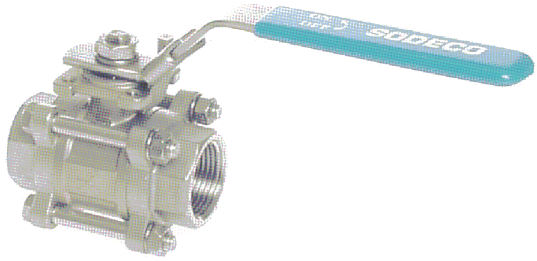

CHARACTERISTICS:


- Full bore
- Locking device
- Mounting flange in accordance with ISO 5211
- Anti-blow out stem
- Chevron packing
- DIN 50.049.3.1.B certificate available on request
- CE approval

PRESSURE RANGE:

1000 PSI - PN 64

MATERIALS:

N°	Description	Qty	Material
1	Body	1	ASTM A 351 CF8M
2	Seat	2	PTFE/RTFE
3	Cap	2	ASTM A351 CF8M
4	Ball	1	CF8M / 1.4408
5	Stem	1	Stainless steel AISI 316
6	Bolt nut	6	Stainless steel AISI 304
7	Bolt washer	6	Stainless steel AISI 304
8	Gland	1	Stainless steel AISI 304
9	Stem packing	1	PTFE/RTFE
10	Thrust washer	1	PTFE
11	Bolt	4	Stainless steel AISI 304
12	Joint gasket	2	PTFE

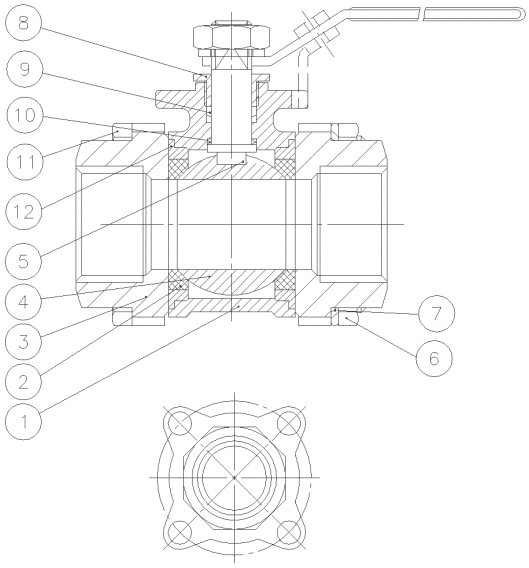



SODECO

Valves Belgium N.V.

TREE-PIECE BALL VALVES


Standard execution - 350 BA series

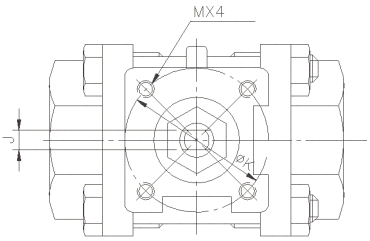

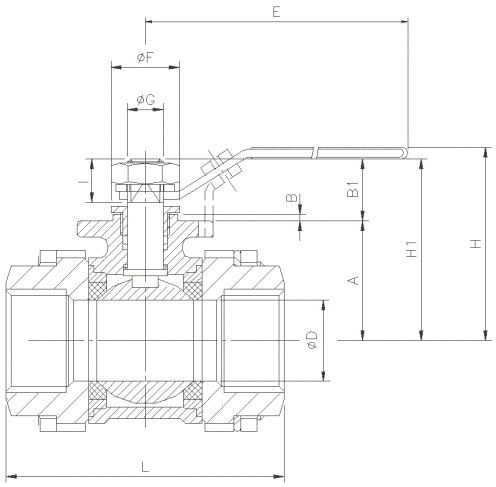

DIMENSIONS AND WEIGHT: (dimensions in mm.)

Diam.	ØD	B	B1	A	E	ØF	ØG	H	H1	I	J	ØK	M	Nm	Kg.	ISO
1/2"	15	2	20,5	29,5	130	25	9,5	65	50	11,5	6,5	36	M5	4	0,56	F03




DIMENSIONS: (in mm.)

Diam.	L	ØB2	B3
1/2"	65,7	21,7	10

TORQUE - KV- VALUE

DN	Ø	Nm	Cv	Kv
15	1/2"	7	12	11

PRESSURE-TEMPERATURE DIAGRAM

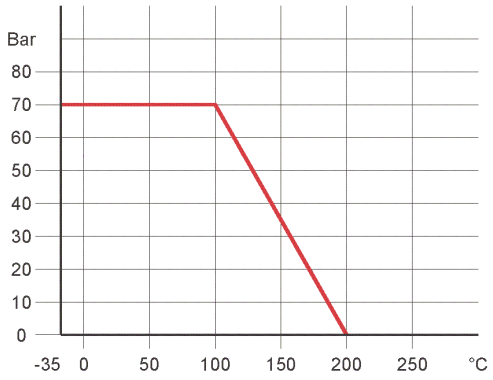

SODECO

Valves Belgium N.V.