

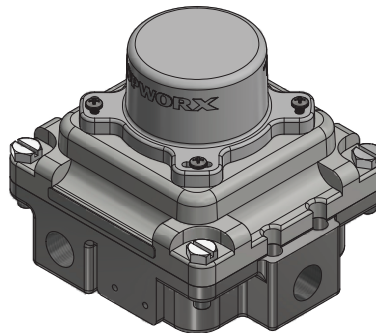
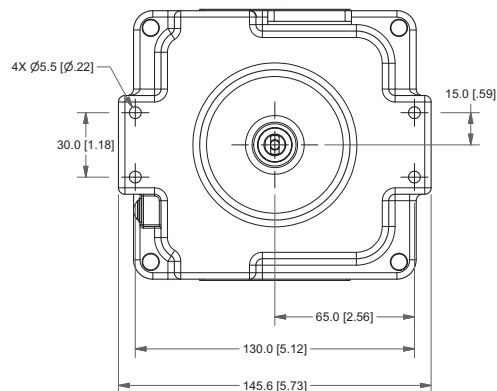


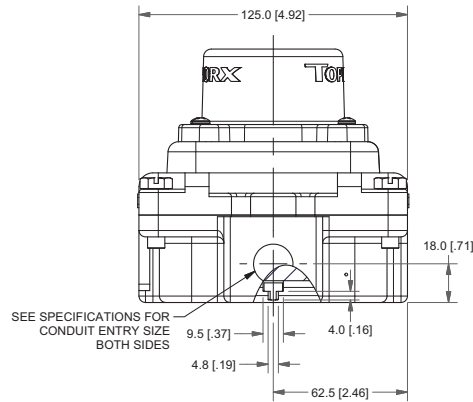


NAMEPLATE

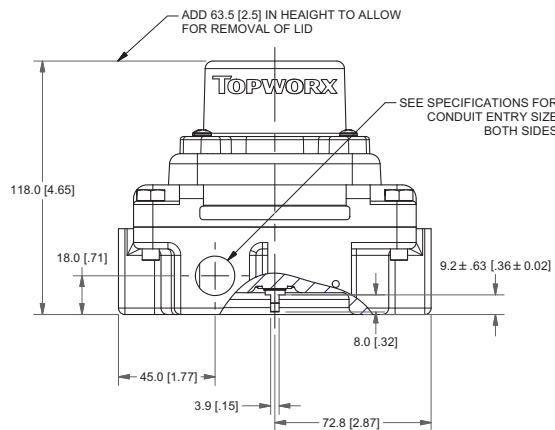

Ex db IIC T6/T5/T4 Gb: -65°C ≤ Ta ≤ 40°C/60°C/80°C
 Ex tb IIIC T85°C/T100°C/T135°C Db: -50°C ≤ Ta ≤ 40°C/60°C/80°C;
 Sira 04ATEX1218X IECEx SIR 06.0054X
 SWITCH: SPDT 10A/250VAC; 3A/24VDC

TopWorx
 3300 Fern Valley Road
 Louisville, KY 40213 USA
 www.topworx.com

Model #:
 Serial #:



MODEL NUMBER

TXP-K2CGNMM


PRODUCT LINE

Switchbox TXP and TXS

SPECIFICATIONS

Enclosure	Tropicalized Aluminum
Bus/Sensor	(2) Mech SPDT w/ gold contacts
Area Classification	Flame Proof
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	NAMUR
Conduit Entries	(2) M20
O-Rings	Silicone
Pilot	No pilot option
Spool Valve	No spool valve option
Valve Cv	No valve Cv option
Manual Override	No manual override option
Regional Certification	No regional cert option
N Switch	No N Switch

WIRING DIAGRAM

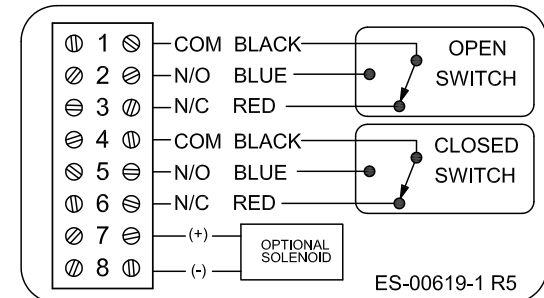

Current as of July 8, 2021 – Subject to change without notice.

TOPWORX
 3300 Fern Valley Road
 Louisville, KY 40213

(502)969-8000 PH
 (502)969-5911 FAX
 www.topworx.com