


PLEASE COMPLETE AS APPROPRIATE

T/LL70 FLOAT SWITCH SPECIFICATION FORM

TYPE T/LL70/

TERMINATION	ABS IP67	DIN	FLYING LEADS	OTHER	CUSTOMER DETAILS
	 NORMAL HEADERS ONLY	 NORMAL HEADERS ONLY	WITH DIN CONN. 		

HEADER & TUBE MATERIAL:		ELECTRICAL:	
BRASS	ST. ST.	VOLTAGE	V
PVC		AC	DC
HEADER STYLE:		SWITCHED CURRENT (AMPS)	
NORMAL	INVERTED	A	
		POWER: VA	
THREAD SIZE:		(Allow for inrush current)	
1/8"BSP	1/4"BSP	LIQUID MEDIUM:	
1/2"BSP	1"BSP	NAME:	
1"NPT	2"BSP	DENSITY:	
OTHER		TEMPERATURE:	
FLOAT MATERIAL:		PRESSURISED PRESSURE:	
STAINLESS STEEL		Y	N
POLYPROPYLENE			
NITROPHYL (BUNA-N)		TURBULENT	Y N

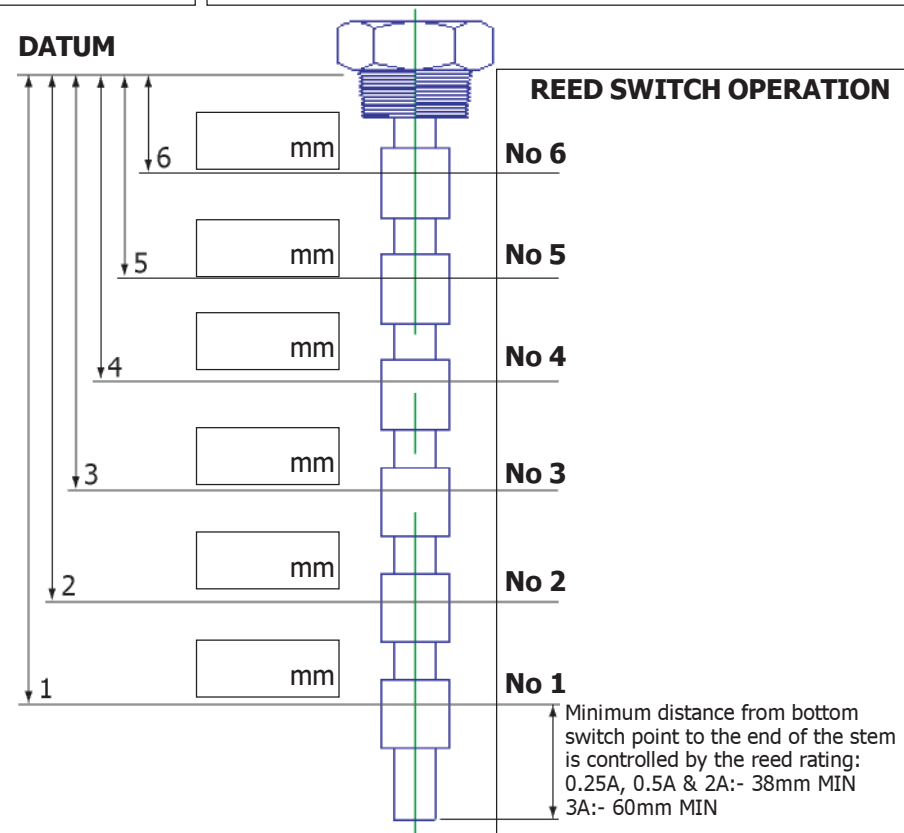

SPECIAL FEATURES/ADDITIONAL INFORMATION:

STEM LENGTH: mm CUT LENGTH: mm

Rochester Sensors *Use Only*

New variant or matrix No:

Completed by:

gfhfhgfhgfh Limited, Berrington Road, Leamington Spa, Warwickshire CV31 1NB, UK
Tel +44 (0)1926 466700 Fax +44 (0)1926 450473
Email sales@fozmula.com Web www.fozmula.com

Method created:

Eng'g Approval: