
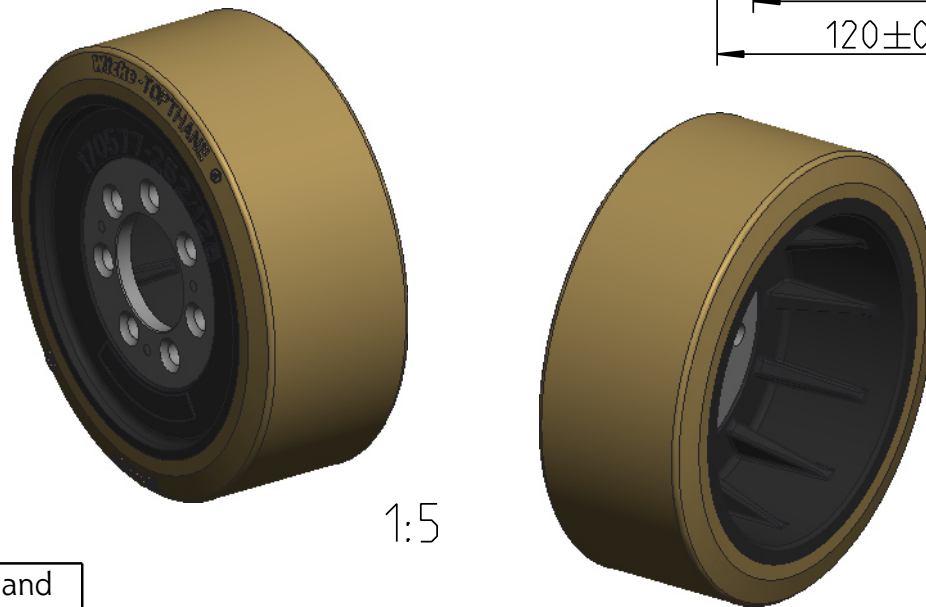


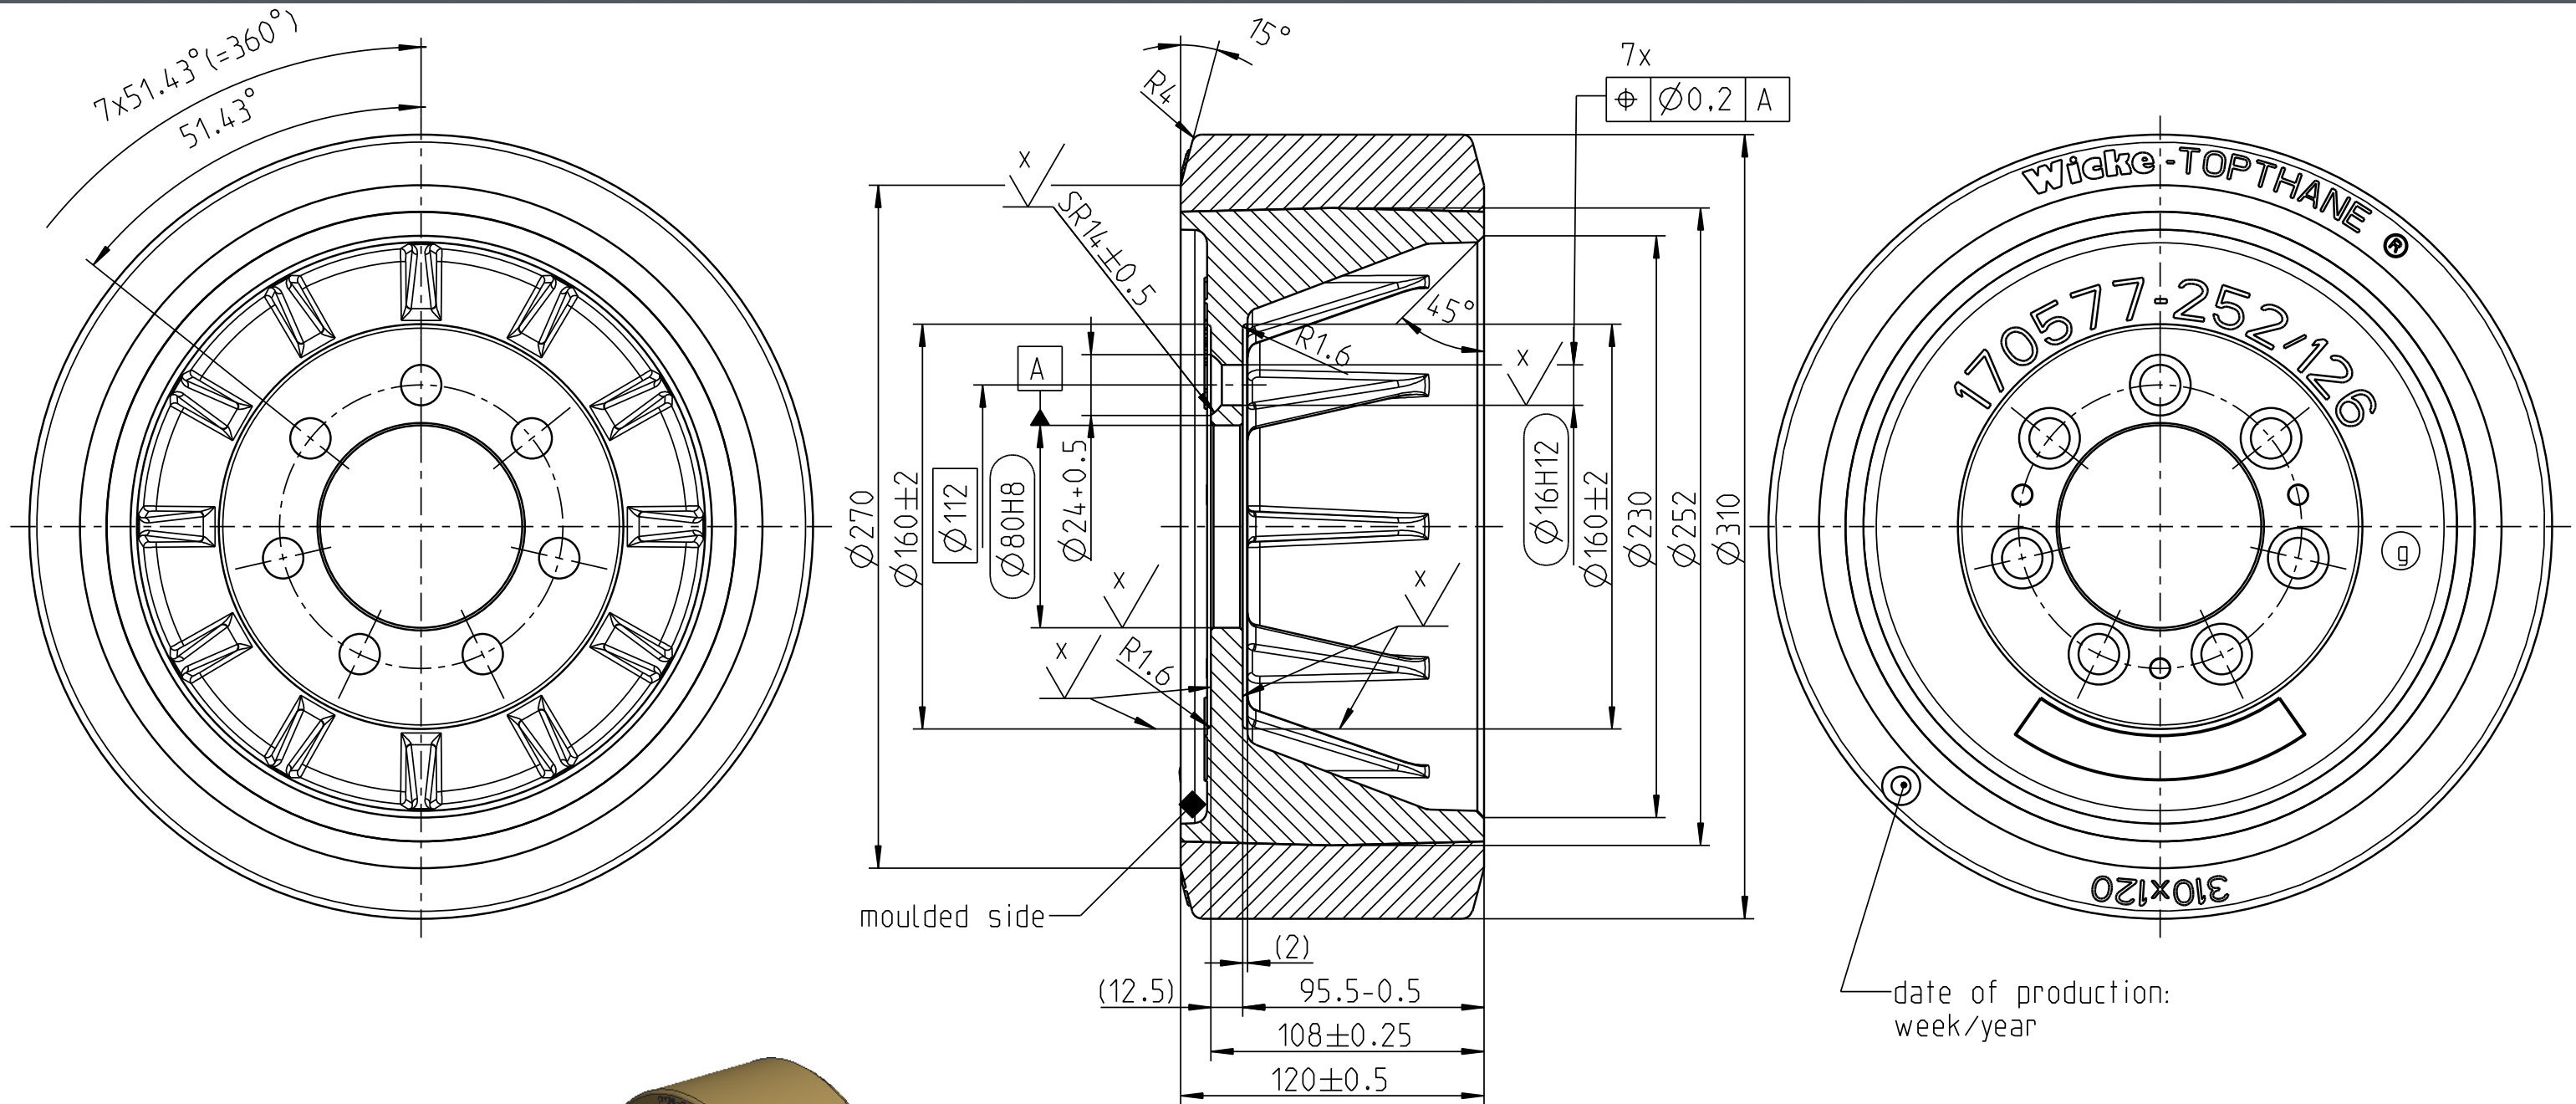

x ✓ = free of paint

✓ RAL 9005 jet black (x ✓)

Please note

copy of drawing is scaled down

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Wicke GmbH + Co.
Elberfelder Straße 109
D-45549 Sprockhövel-Herzkamp

OEM		load capacity	
speed		drive, swivel and brake wheels	free running load wheels
80 H8	+0.046 0	6 km/h	3000 kg
16 H12	+0.180 0	10 km/h	2450 kg
dimension	deviation	16 km/h	2100 kg

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights are reserved in the event of the grant of a patent, utility model or design.				accept. tolerances EN ISO 8015 EN ISO 1101		surface EN ISO 1302		scale 2:5	weight 16.676 kg
				drawn by 01.07.16 Böscher		checked 01.07.16		Material tyre: Vulkollan® 92 Shore A rim: EN-GJS-500-7	
				date 01.07.16		signatures		title	
				standard		change checked		Unit: D ☒ C ☐	
				g 2-D to 3-D: rim amended 01.07.16 Bös.		Wicke Germany		drawing number 166402	
				rev. description date sign.		sheet 2/2 A3		repl. for: Original same No. dd.: 12.04.99/f replaced by:	