MH114-3B

Electrically Isolated, Multipurpose 2 Rail Magnet Mounting Base with 1/4-28 Blind Tapped Hole, 50 lbs. (23 kg) Pull Strength, 1.4 in. (35.56 mm) OD, 0.75 in. (19.05 mm) Height


VIBRATION ANALYSIS HARDWARE



Product Features

Electrically Isolated

- Durable 303 Stainless Steel case and mounting hole
- High strength Neodymium Iron Boron magnet optimizes pull strength and performance
- 2 rail mounting system allows measurements on flat and curved surfaces

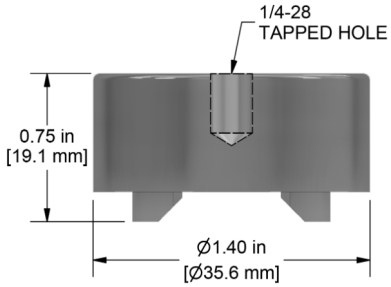

Specifications	
Max Temperature	266 °F (130 °C)
Case Material	303 Stainless Steel
Magnet Material	Neodymium Iron Boron
Dimensions	1.40 in. (36 mm) OD, 0.75 in. (19 mm) Height
Pull Strength	50 lbs. (23 kg)
Sensor Mounting	1/4-28 Mounting Hole

Chemical Compatibilities for Reference

- Gasoline - A
- Methanol - A
- Lubricants – A

Compatibility

- Compatible with all sensors with 1/4"-28 mounting stud or bolt
- Conversion mounting studs sold separately

Built to Order