REV.	DATE	DESCRIPTION OF CHANGE	BY	APP'D

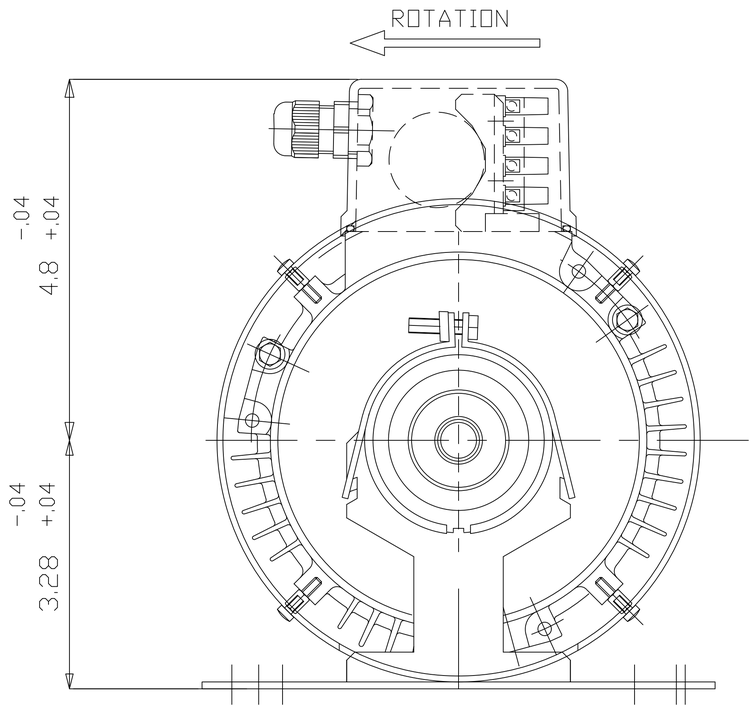

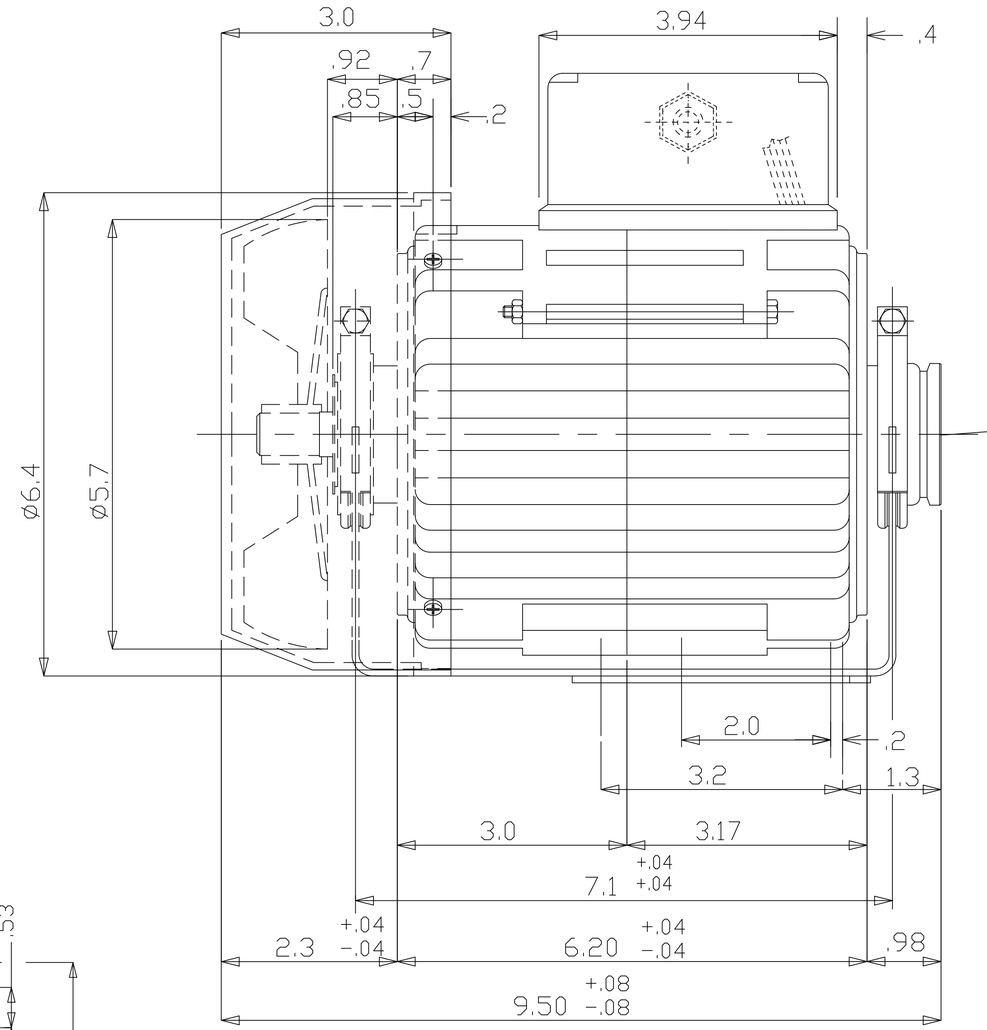

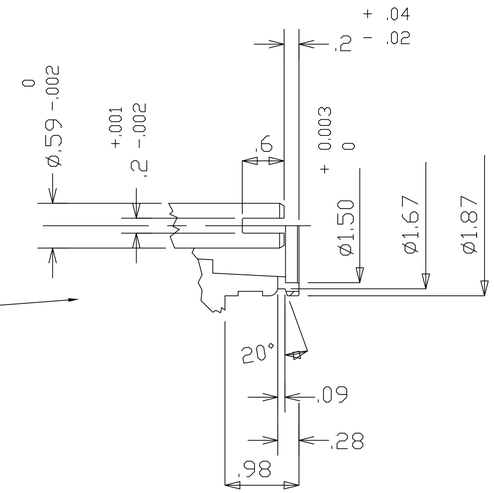

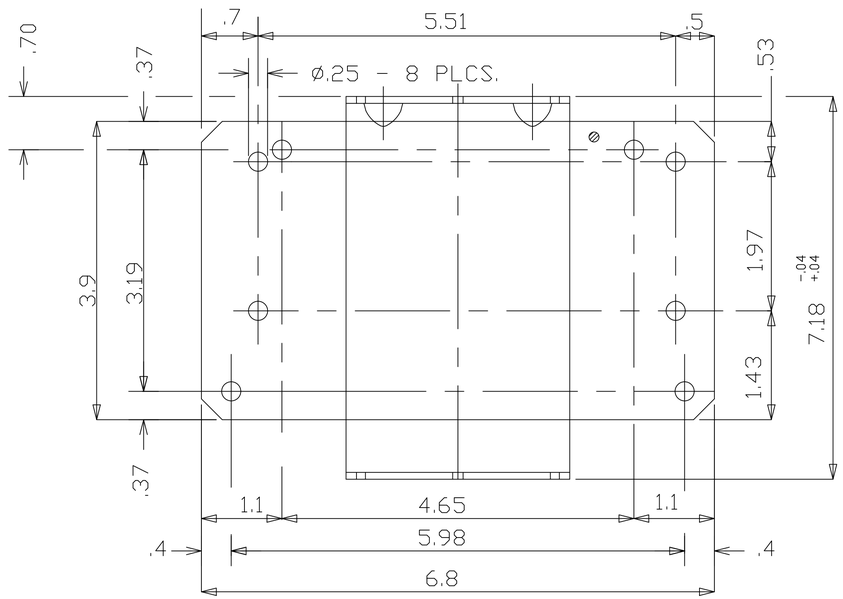

INTERNAL CONNECTIONS BOX



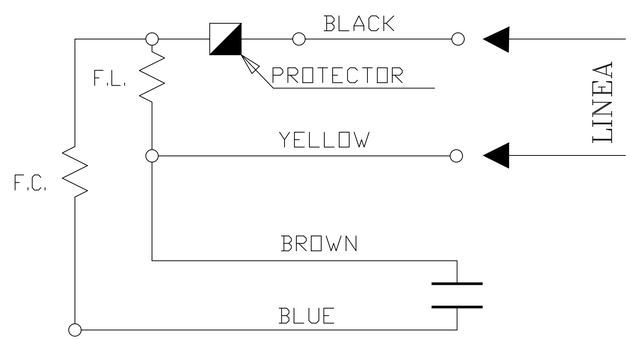

712	RPM	110827.00	CLOSED	F	230 (VAC)	50 (Hz)	1360 (RPM)	CW	4.2	3/4	IP55
MODEL NO.	SUPPLIER	SUPPLIER MODEL NO.	MOTOR TYPE	INSULATION CLASS	INPUT VOLTAGE (±10%)	INPUT FREQUENCY	MOTOR SPEED	ROTATION (VIEWED FROM SHAFT END)	RATED AMPS	HORSEPOWER	PROTECTION

MATERIAL

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED:
REMOVE BURRS AND SHARP EDGES.
MACHINED SURFACE ROUGHNESS
125 MICROINCHES Ra.
TOLERANCES:
.XX ± .010
.XXX ± .005
ANGULAR DIM. ± 1°

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE EXCLUSIVE PROPERTY OF PROCON. IT MAY NOT BE COPIED OR REPRODUCED, IN ANY FORM, WITHOUT THE EXPRESS WRITTEN AUTHORITY OF PROCON.

Procon US, Inc.

TITLE: MOTOR, 230V, 50HZ, 3/4 HP

SCALE: FULL | DRAWN: MEA | DATE: 9-21-12 | CHECKED: JJ | DATE: 10-23-12 | DRAWING NO.: 712

DO NOT SCALE DRAWING | SHEET 1 OF 1

REV.	DATE	DESCRIPTION OF CHANGE	BY	APP'D

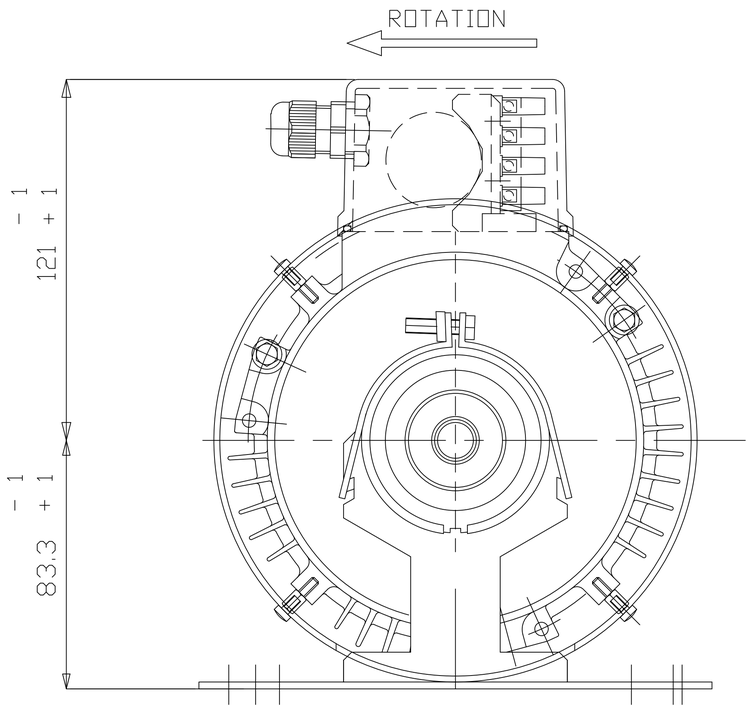

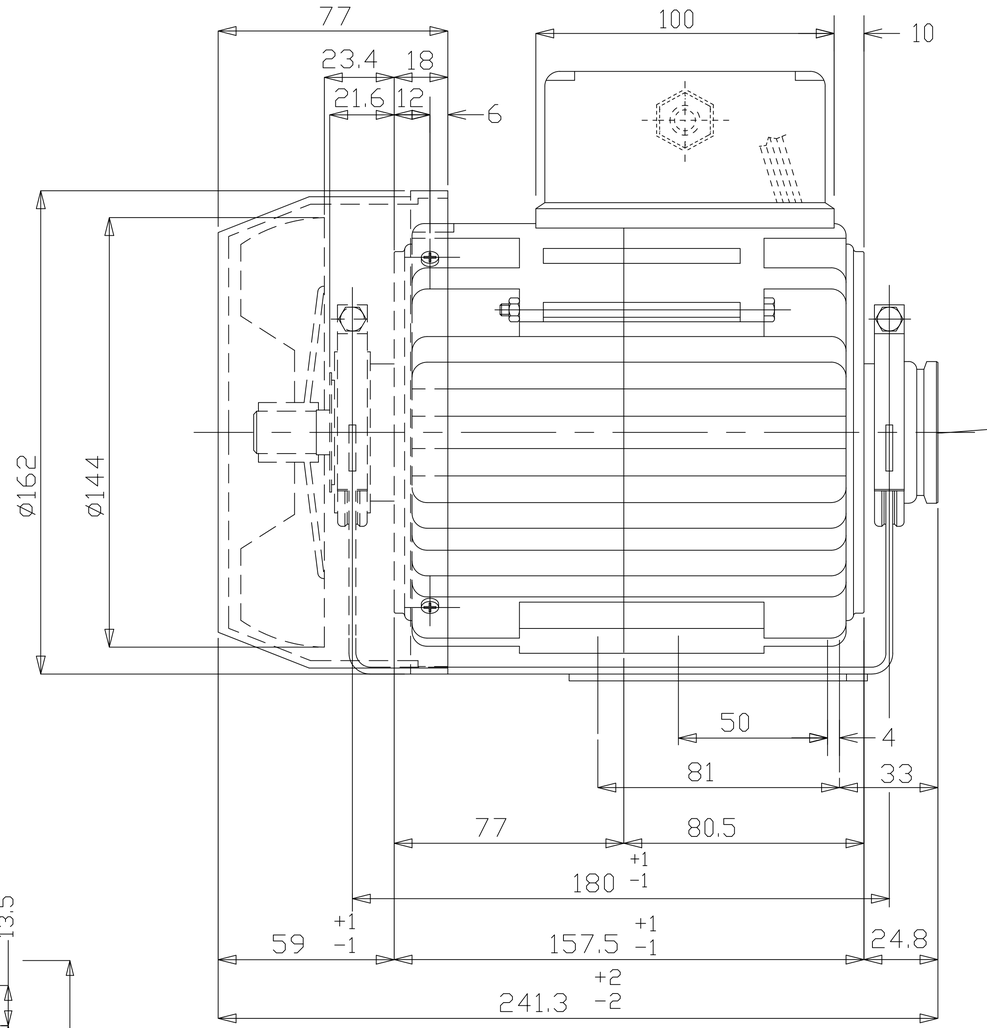

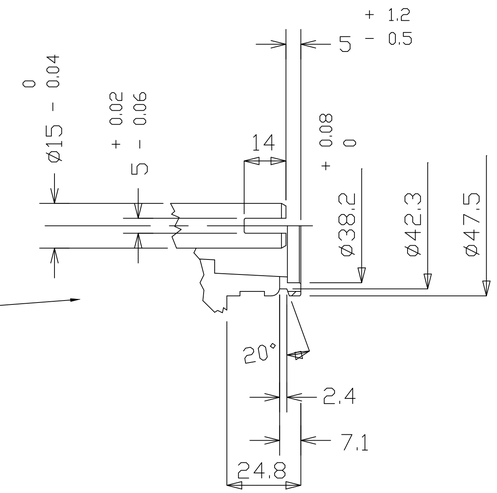

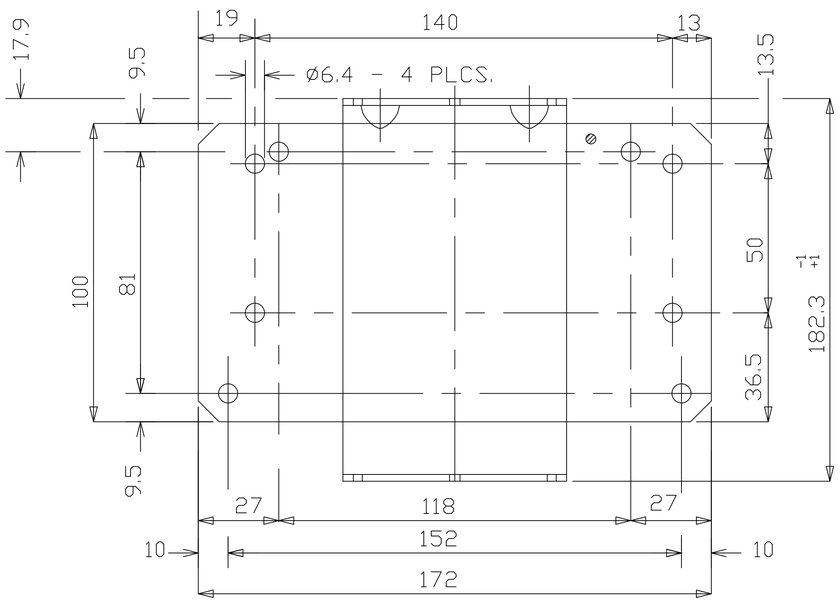

INTERNAL CONNECTIONS BOX



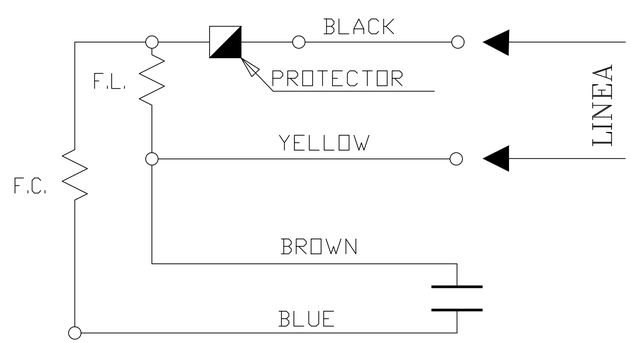

712	RPM	110827.00	CLOSED	F	230 (VAC)	50 (Hz)	1360 (RPM)	CW	4.2	3/4	IP55
MODEL NO.	SUPPLIER	SUPPLIER MODEL NO.	MOTOR TYPE	INSULATION CLASS	INPUT VOLTAGE (±10%)	INPUT FREQUENCY	MOTOR SPEED	ROTATION (VIEWED FROM SHAFT END)	RATED AMPS	HORSEPOWER	PROTECTION

ALL DIMENSIONS ARE IN MILLIMETERS

MATERIAL

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED:
REMOVE BURRS AND SHARP EDGES.
MACHINED SURFACE ROUGHNESS 3.2 MICROMETERS Ra.
TOLERANCES:
.X ± 0.254
.XX ± 0.127
ANGULAR DIM. ± 1°

Procon US, Inc.

TITLE: MOTOR, 230V, 50HZ, 3/4 HP

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE EXCLUSIVE PROPERTY OF PROCON. IT MAY NOT BE COPIED OR REPRODUCED, IN ANY FORM, WITHOUT THE EXPRESS WRITTEN AUTHORITY OF PROCON.

SCALE: FULL | DRAWN: MEA | DATE: 9-21-12 | CHECKED: JJ | DATE: 10-23-12 | DRAWING NO.: 712

DO NOT SCALE DRAWING | SHEET 1 OF 1