


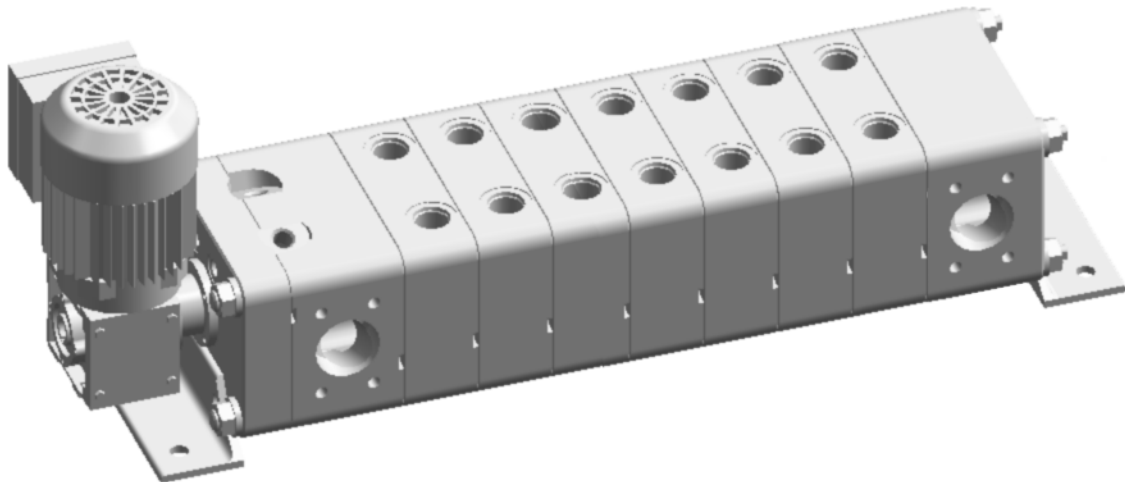

Technical Data

Turbine Frame Size	GE Frame 9E
Ordering Drawing / Specification	137A3517 / 91-446627
Number of Elements	14
Total Flow Rate	867 l/min. (229 GPM) at 1650 rpm
Operating Pressure	Max. 84 bar (1200 psig)
Differential Pressure	Max. 7 bar (100 psig)
Fluid Temperature	Max. 135°C (275°F)
Fuels	Distillate, Heavy Fuel, Crude Oil, Naptha

Materials

Casing and Housing	Surface Treated Nodular Cast Iron
Shafts and Gears	Tungsten Carbide Coated Hardened Stainless Steel
Bearings	Hardened Stainless Steel
Sealing	Viton

Weight and Shipping Dimensions

Gross Weight	240 kg
Net Weight	200 kg
Dimensions	140 cm x 45 cm x 80 cm

Starter Motors

AC motors – 50 Hz	415 V; 400 V; 380 V
--------------------------	---------------------

94/9 EG ATEX

This Flow Divider is in accordance with Appendix II of Directive 94/9/EC

CE Ex II 3 G IIB X

