

FIXING POINT

x2

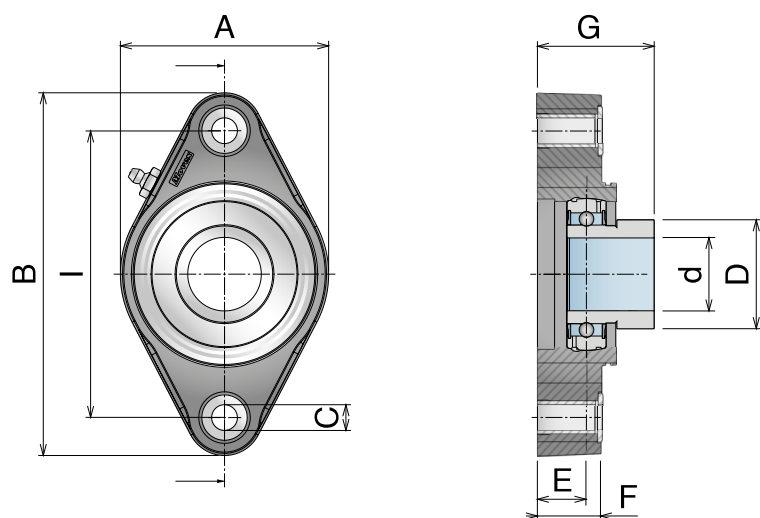

SOLID

UCFL LOCKING COLLAR

STANDARD BEARINGS - SOLID VERSION

Main features:

- Housing in reinforced polypropylene
- Chrome steel ball bearing (pre-lubricated)
- Nickel-plated brass mounting hole spacers
- Nickel plated steel grease nipple 1/8" GAS
- Stainless steel washers

FIXING METHOD
(ECCENTRIC RING)

LOCKING COLLAR

Chrome Steel											Caps (Accessories)	
Article-Number	Series	d	I	A	B	C	D	E	F	G	Close	Open
82305	UCFL 204/76,5	20	76,4	55,9	100	10,2	33,3	16	12	33,5	89007	89057-20
82310	UCFL 204		90	62	116	11	33,3	16	20	39,9	89004	89054-20
82301	UCFL 205/90	25	90	71	130	10,2	38,1	16,8	22,5	36,3	89001	89051-25
82311	UCFL 205		99	71	130	11	38,1	16,8	22,5	40,2	89001	89051-25
82322	UCFL 206/90	30	90	85	116	10,2	44,5	14,4	20	36,5	89005	89055-30
82312	UCFL 206		117	85	148	11	44,5	20	26	47,7	89002	89052-30
82303	UCFL 207/117	35	117	93	148	11	55,6	19,5	26	43	89003	89053-35
82313	UCFL 207		130	93	162	11	55,6	19,5	26	49,9	89003	89053-35
82304	UCFL 208/117	40	117	93	148	11	60,3	19	26	53,7	89003	89053-40

The **UCFL standard bearings - solid version** are made in reinforced polypropylene with good mechanical strength and excellent resistance against corrosive chemicals such as water, oils, petrol and liquids containing alcohol. Bearings are made in chrome steel, with 2,5° adjustment. The bearings inside the flange can be adjusted by 2.5° and the grease nipple is made in nickel-plated steel. They can be used at temperature between 0°C and +80°C.