



MAC800-D2-FAAJ

Int.ServoAC 746WS1 2.38Nm IP55 Abs

MAC motorË is a series of integrated (all-in-one) servo motors with shaft power from 46 W to 4500 W. +400 W and new F-series (50..140 W) are programmable through ePLC (embedded-PLC). Choose between a large number of control modules.

Options include:

- Absolute Multiturn Encoder (incremental encoder is standard)
- Built-in Brake or Brake module (MABxx)
- Ethernet module w/built-in Switch for easy daisy-chaining and all protocols (Profinet, EtherNet/IP, EtherCAT, SERCOS, ModbusTCP/UDP, Powerlink)
- Wireless modules are also available: WLAN or BlueTooth
- CANopen, Devicenet or Profibus or ePLC modules
- Serial communication modules, RS232 and/or RS485
- High IP versions are also available (IP 65..66..67)
- Food or Medico types in Stainless Steel IP69K

Unique Ethernet functionality: use MacTalkË (PC software) to change freely between all the different Ethernet protocols, you dont need several different types on stock ã ONE is enough.



General information

Description	Int.ServoAC 746WS1 2.38Nm IP55 Abs , WxHxL: 80x120x174 mm. 3000 RPM. 2.38 Nm RMS / 6.8 Nm Peak, IP55, Single 8192 CPR / Absolute multiturn ±8178 revs, Color: Black, Ø19x40 mm with key 6x30 mm		
Manufacture	JVL	Motor type	Integr. AC-servo - Rotating
Color	Black		
Motor power [W]	746	Power Peak [W]	2238
Duty Cycle	S1	Max Duty Cycle [%]	100
Continues Torque [Nm]	2.38	Peak torque [Nm]	6.8
Main supply [V]	115, 230	Voltage type - Main	AC
Speed [Rpm]	3000	Connectivity: Without module	RS232 - 5VDC, Modbus RTU
Encoder type	Abs. Multiturn Encoder +/- 8178 rev.	Encoder [Counts/rev]	8192
Integrated PLC	Yes	Brake	No
STO connector	No	Fan mounted	Yes
Integrated gear	No	Gear ratio	-
Approval - UL	Approved	Approval TÜV - STO	No
PLC no. of AIN	2	PLC no. of DI	-



MAC800-D2-FAAJ

Int.ServoAC 746WS1 2.38Nm IP55 Abs

General information

PLC no. of DIO	-	PLC no. of DO	2
Multifunction IOs	2		
Flange size	80x80	Protection house	IP55
Shaft size - Front [mm]	19.0mm	Protection shaft	IP55
Weight net [kg]	2.90	Weight gross [kg]	2.99
Tariff no	85015100	Country Of Origin	DK



MAC800-D2-FAAJ

Int.ServoAC 746WS1 2.38Nm IP55 Abs

Mechanical information

Motor type	Integr. AC-servo - Rotating	Color	Black
Rotor inertia [kgcm ²]	0.91	Max inertia factor	20
Duty Cycle	S1	Max Duty Cycle [%]	100
Encoder type	Abs. Multiturn Encoder +/- 8178 rev.	Encoder [Counts/rev]	8192
Precision Motor - Absolute [Deg]	0.04	Precision Motor - Max Load [Deg]	
Precision Motor - Repeatability [Deg]	0.04		
Brake	No	Brake - Go ON time [ms]	-
Brake Holding torque [Nm]	-	Brake - Go OFF time [ms]	-
Radial load [N]	180	Radial load distance [mm]	20
Axial load [N]	110		
Axial play [mm]	xxx	Axial play force [N]	xxx
Front bearing type	xxx	Rear bearing type	xxx
Integrated gear	No	Gear ratio	-
Gear efficiency [%]	-	Gear backlash [ArcMin]	-
Motor length [mm]	174	Motor width [mm]	80.0
Motor height [mm]	120.0	Protection house	IP55
Customer Sealing	Standard		
Flange size	80x80	Mounting holes front [mm]	5.5
Motor diameter center front [mm]	70.0	Bolt circle diameter front [mm]	90.0
Flange material		Flange Thickness [mm]	
Shaft Key included	Key included on shaft	Shaft Key Dimension	6x6x30
Shaft size - Front [mm]	19.0mm	Protection shaft	IP55
Shaft length Front [mm]	40.0	Shaft material	Steel
Approval - ROHS-3	Yes	Approval - UL	Approved
Approval TÜV - STO	No	Approval - ATEX	No
2D [PDF]	Download	2D [DWG]	No
3D [DWG]	No	3D [EASM]	No




MAC800-D2-FAAJ

Int.ServoAC 746WS1 2.38Nm IP55 Abs

Mechanical information

3D [IGES]	No	3D [STEP]	Download
Datasheet - pdf	Yes	User Manual	Download
REACH SVHC document	Download	Low voltage Directive	LVD conformity with EU standard: EN 61800-3
No Dual Use	-		

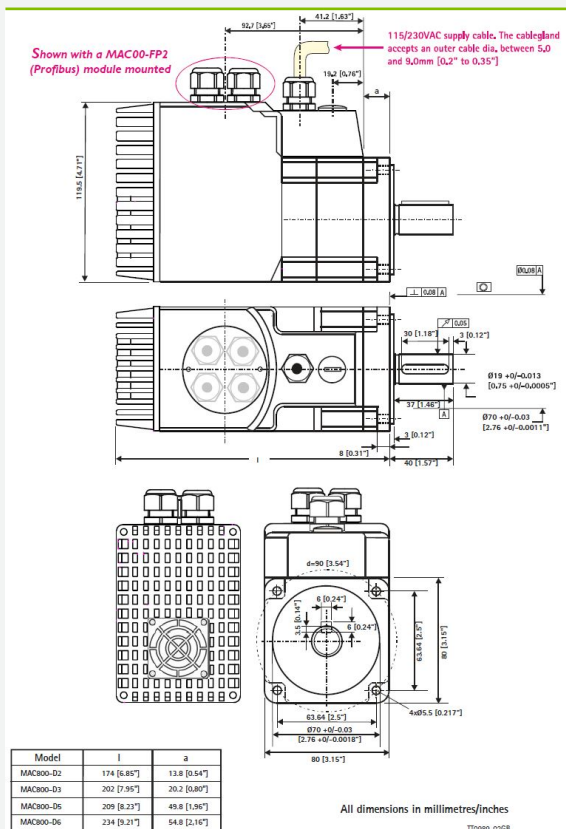

Shaft Seal




MAC800-D2-FAAJ

Int.ServoAC 746WS1 2.38Nm IP55 Abs

Connector information

Motor connectors

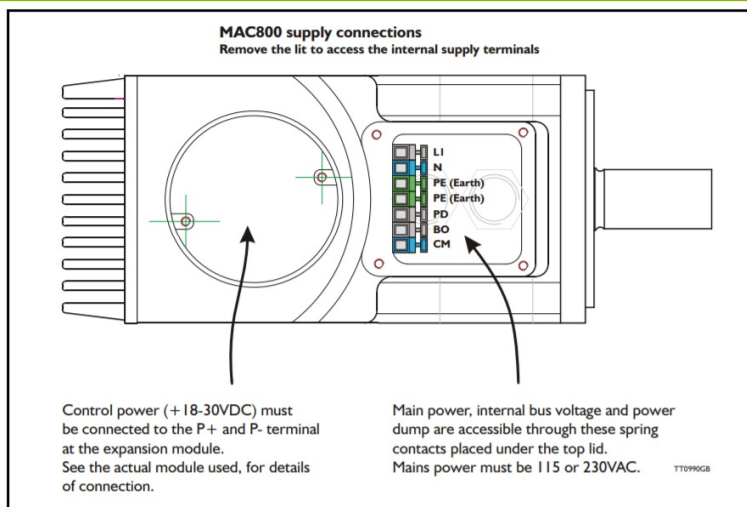

Expansion connector	Generation 1 and 2		
PLC no. of DI	-	PLC no. of DO	2
PLC no. of DIO	-	PLC no. of AIN	2
Multifunction IOs	2		
Connector Power	PG12 - Internal terminal	Connector Power Supplier	
Connector Power direction	Straight		
Connector PDO	PG12 - Internal terminal	Connector PDO Supplier	
Connector STO	No		
Module connections	Here - Click for module cable connections		




MAC800-D2-FAAJ

Int.ServoAC 746WS1 2.38Nm IP55 Abs

Torque, force and Power information

RMS torque [Nm]	2.38	Peak torque [Nm]	6.8
Supply Volt 1 [V]	1x115	Supply Volt 2 [V]	1x230
Supply Volt 3 [V]		Supply Volt 4 [V]	-

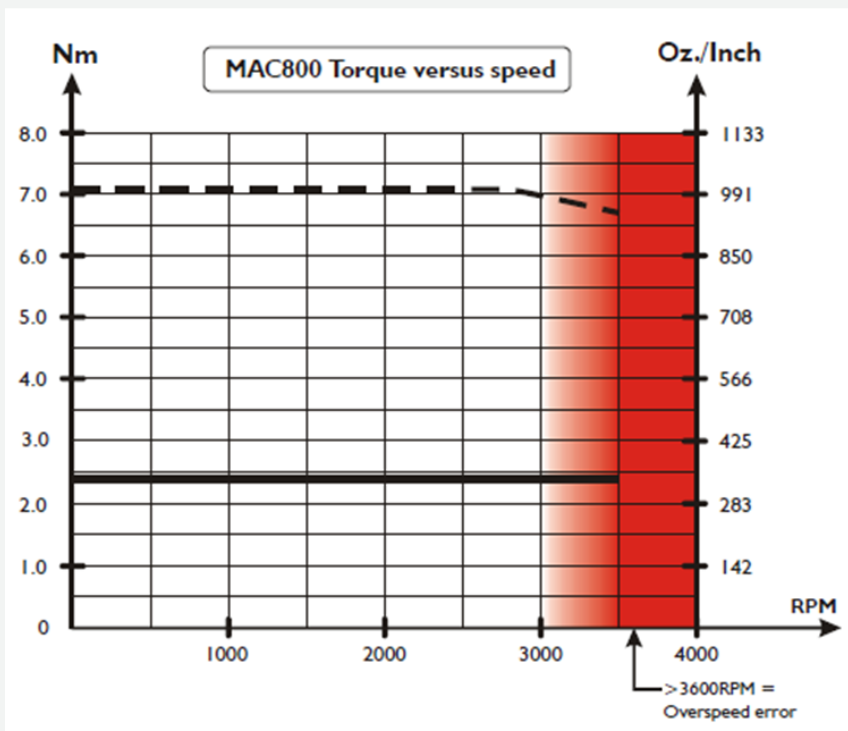

Conditions:
Supply voltage = 90-240VAC
Ambient temperature < 40°C
Torque setting = 300% (max)
Load setting = 1.0

--- = Peak torque
— = Average torque



MAC800-D2-FAAJ

Int.ServoAC 746WS1 2.38Nm IP55 Abs

Electrical information

Control voltage (CVI/O+) [VDC]	18-28	Control Voltage (CVI) Min-Max [VDC]	18-30
Main supply [V]	115, 230	Main supply Min-Max [V]	90-260
Voltage type - Main	AC	Main Voltage possible	1x115VAC, 1x230VAC
PLC no. of DI	-	PLC no. of DO	2
PLC no. of DIO	-		
PLC no. of AIN	2	Analogue voltage	-/+10VDC, -/+11bit
Multifunction IOs	2		
MTBF 30% [Year]	-	MTBF 100% [Year]	-
Internal Power-Dump Resistance [Ohm]	68	Internal Power-Dump Power [W]	9
PD connection - Int/Ext	Int/Ext PD in Parallel		
External Power-Dump Resistance Minimum value [Ohm]	33	External Power-Dump Max Current [A]	100
Inrush current -Main max [A]		Inrush special	No
Recommended fuse	115VAC: FRN-R-15 Cooper Bussmann inc. 230VAC: T10A@230VAC type gG, Do or Dz.	P- isolated from Earth	No
Resistance [Ohm]		Induction [mH]	



MAC800-D2-FAAJ

Int.ServoAC 746WS1 2.38Nm IP55 Abs

Communication information

Software	MacTalk
-----------------	---------

Connectivity:	RS232 - 5VDC, Modbus RTU e-PLC Files
Without module	



MAC800-D2-FAAJ

Int.ServoAC 746WS1 2.38Nm IP55 Abs

Cable information

Item number	Mount on	Cable con 1 +Con 1 angle	Cable application	Wires no totally	Cable length [m]
Item description		Cable con 2 +Con 2 angle	Cable flexibility	Wire [mm2]	Connector 1 LED