


Part Number: ZVA2 4.1R EK044green - EK043green

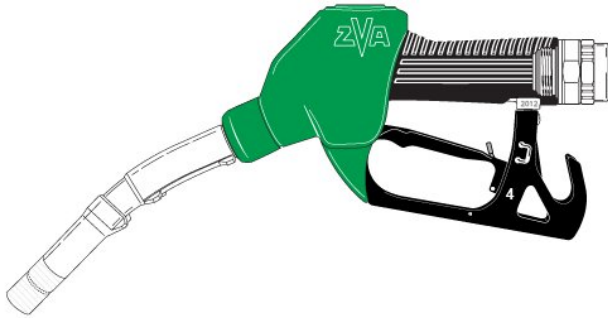

© ELAFLEX HIBY, Hamburg / Germany

<https://nozzleconfigurator.elaflex.de/ZVA SLIMLINE 2/1463/20760/23913/SW/21184/WITHOUT PSB/WITHOUTPSB/PROPNO/20813/23635/20894/21300/20908/000/20914/21198/23775/Product19.html>

Nozzle Type	ZVA Slimline 2 for petrol stations Automatic nozzle Max. flowrate 80 l/min. Suitable for gasoline (also with ethanol content up to E 85), diesel, fuel oil, biodiesel. Not suitable for viscous oils. Certificate: Meets EN 13012. Fulfills the requirements of safety and weight and measures. ATEX (Ex II 1G) certificate no.: TPS 19 ATEX 103415 0002 U. TÜV approval P-TÜ7-01930.
Body	ZVA Slimline 2 (Standard) Standard
Guard	EG 281.4 Guard No. 4
Connection	Swivel Easy-rotating swivel.
Swivel	EA 075.1 1" BSP female
Pump Safety Break	Without
Pump Safety Break	Without
PSB Propeller	Without propeller (Standard) Without
Spout	ER 042.7 Reduced spout OD 21 mm, for unleaded.
Latching	With Latch Pin Standard Hold-open function.
DSA	Without DSA (Standard)

	Standard vacuum cap
Special Type	Standard Temperature range -20° C up to +55° C With seals and diaphragm for operating in moderate climate regions to -20° C.
Scuffguard	EK 044 green Scuffguard green
Badge	- -
Product Sleeve / Splashguard	EK 043 green Product Sleeve green
Strainer	EK 172 Standard strainer Strainer 400 µm (40 mesh), white.
Break Sleeve	Without break sleeve Without

Contact:

ELAFLEX HIBY GmbH & Co. KG
Schnackenburgallee 121
22525 Hamburg (Germany)
Tel.: +49 40 540 005 0
Fax: +49 40 540 005 67
E-Mail: info@elaflex.de
Internet: www.elaflex.com