
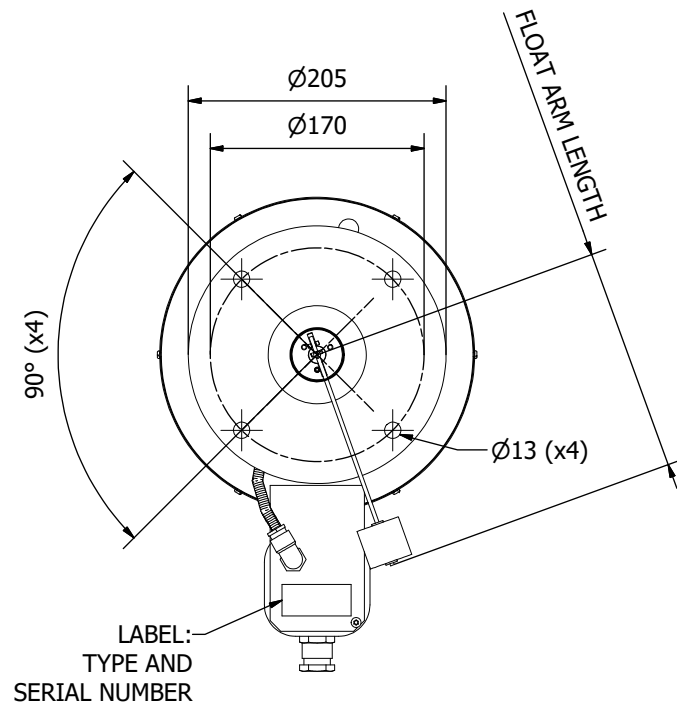
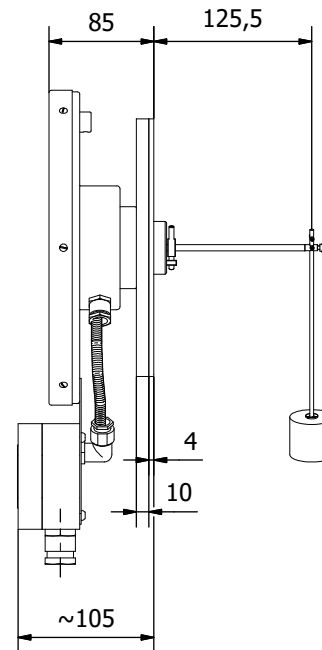



NOTICE
THIS DRAWING IS THE PROPERTY OF QUALITROL/QUALITROL AKM AND IS LOANED ONLY ON THE CONDITION THAT IT WILL BE USED TO FACILITATE THE PURPOSE FOR WHICH INTENDED AND NOT BE REPRODUCED, COPIED OR OTHERWISE DISPOSED OF, AND IS NOT TO BE USED IN WHOLE OR PART FOR FURNISHING INFORMATION RELATIVE TO THE MAKING OF DRAWINGS, PARTS, APPARATUS OR PARTS THEREOF, EXCEPT BY WRITTEN ORDER FROM QUALITROL/QUALITROL AKM.

MODEL NO. 34751

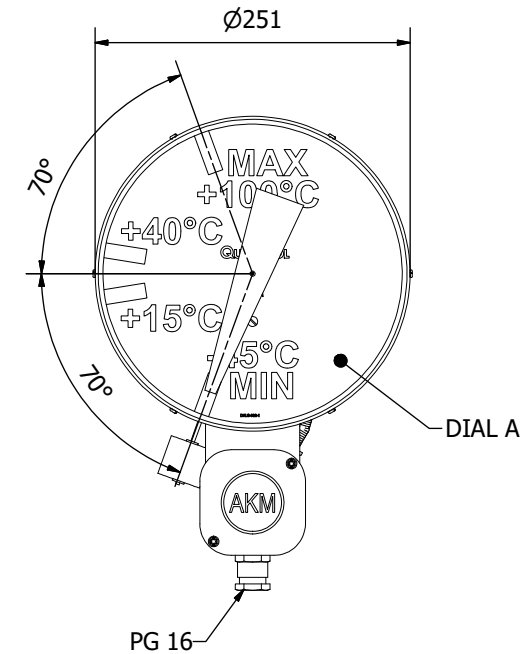

INSULATION TESTED TO EARTH WITH 2000V 50Hz 60s.
PROTECTION CLASS IP54 IEC 529.
CONTACT RATING 250V, 5A AC / 125V, 0,3A DC.

No. 1 WIRING DIAGRAM



ON RISING LEVEL, 21 CLOSSES ON 24 AND OPENS ON 22 AT 'MAX'

ON LOWERING LEVEL, 11 CLOSSES ON 14 AND OPENS ON 12 AT 'MIN'

6L03

Revision	DRAWING NO. TYPE	CLIMATE	AMBIENT TEMP RANGE	MAX WIRE SIZE	A DIAL TYPE	ELECTRICEL SYMBOL	SCADA OUTPUT
28577 10-5-10	34751-1	TEMPERATE	-45°C TO +70°C	4 mm²	DALS-032-01	No.1	
28577 10-5-10	34751-2	COLD	-60°C TO +70°C	4 mm²	DALS-032-02	No.1	
28577 10-5-10	34751-3	TROPICAL	-10°C TO +70°C	4 mm²	DALS-032-3	No.1	
28135 obs. 5-25-10	34751-4	TEMPERATE	-45°C TO +70°C	1,5 mm²	DALS-032-01	No.1 + No.2	4-20 mA
28136 obs. 5-25-10	34751-5	COLD	-60°C TO +70°C	1,5 mm²	DALS-032-02	No.1 + No.2	4-20 mA
28136 obs. 5-25-10	34751-6	TROPICAL	-10°C TO +70°C	1,5 mm²	DALS-032-03	No.1 + No.2	4-20 mA

CONSERVATOR DIA.	FLOAT ARM LENGHT	PART NO.
470	190	44708-190
690	280	44708-280
940	400	44708-400
1260	560	44708-560
1570	720	44708-720

SHEET 2 OF 2 FOR ENGINEERING USE ONLY

-	2/6/2019	DIAL DALS-032-3 WAS DALS-032-03	38824
-	2/3/2014	REMOVE RETAINING CLIP: LWRS-100-01	32172
4	080523	ARM LENGHT 190, 280 WAS 165, 280; PART NO. CHANGED	01126
3	080416	RELEASED	01107

LET	DATE	ALTERATION	C.N.
-----	------	------------	------



AB Qualitrol AKM
Flygfältsgatan 6C
SE - 128 30 Skarpnäck
Sweden

Phone: +46 8 447 54 50
Fax: +46 8 604 68 10

TITLE: OIL LEVEL TRANSMITTER
LEVEL DRIVE

MODEL NO. 34751

SHEET 1 OF 2