




Feature

- CPU :Intel Celeron J4125/J6412 or Core i5 8/10/11th-U Intel
- Core i5/i7 J4125/J6412: DDR4 SODIMM x1; Core 5/i7: DDR4
- SODIMM x2 LCD+HDMI Dual Display
- Full plane touch screen, front panel IP65
- Low Power Fanless PC
- 9 ~ 36V Wide Voltage

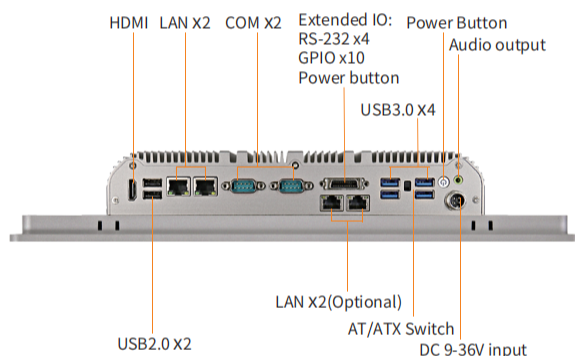


Specifications

Model	HST1506	
CPU	Intel Celeron J4125/J6412 CPU Intel Core 8/10/11代-U i5/i7 CPU	
Memory	J4125/J6412: DDR4 SODIMM x1 Core i5/i7: DDR4 SODIMM x2	
Ethernet	2x 2.5 GbE RJ45 Intel® i225V (4 x 2.5GbE RJ45 Intel i225V)	
I/O	4 x USB2.0 ¹ , 2 x USB3.0 ¹ (J4125/J6412) 2 x USB2.0 ¹ , 4 x USB3.0 ¹ (8/10/11th intel Core i5/i7) 2 x DB-9 COM1&COM2,RS-232/422/485 1 x Audio Line-out 2 x 8Ω 1W 1 x AT/ TX 1 x HDMI 1 x EXT IO: 4*lines 3*COM, 10*lines GPIO, 1*Switch	
Storage	1 x M.2 2242/2260/2280 SATA 1 x SATA(2.5" SATA) 1 x M.2 2280 NVME	
Expansion Slots	M.2 3042/3052 3G/4G/5G Module, Onboard SIM card slot M.2 2230 WiFi+BT	
Watchdog timer	1~65535 s Editable	
OS	Windows® 10/11, WES 10, LINUX	
Structures		
Material	Aluminium	
Installation	VESA 75/ 100 Panel	
Size	402.76x252.19x65.3 mm	
Weight	TBD	
Working Temp	-20°C ~ 60 °C	
Storage Temp	- 30°C ~ 70°C	
Humidity	10~90% @30°C,	
Power Input	DC 9 ~ 36V 4-pin	
LCD	15.6" TFT-LCD	
Resolution	1920x1080	
Max Color	262K	
Brightness	250 cd/m²	
Vis (CR>=10)	- 85 ~ 85° (H), - 85 ~ 85° (V)	
Backlight	LED	
Backlight hours	30,000	
Touch screen		
Typ	5 lines Resistive type	Projected capacitor
Transmissivity	78%	>85%
Service life	250g click 10000Thous	>50000Thous

HST-1506 15.6" Panel PC

■ Un:mm

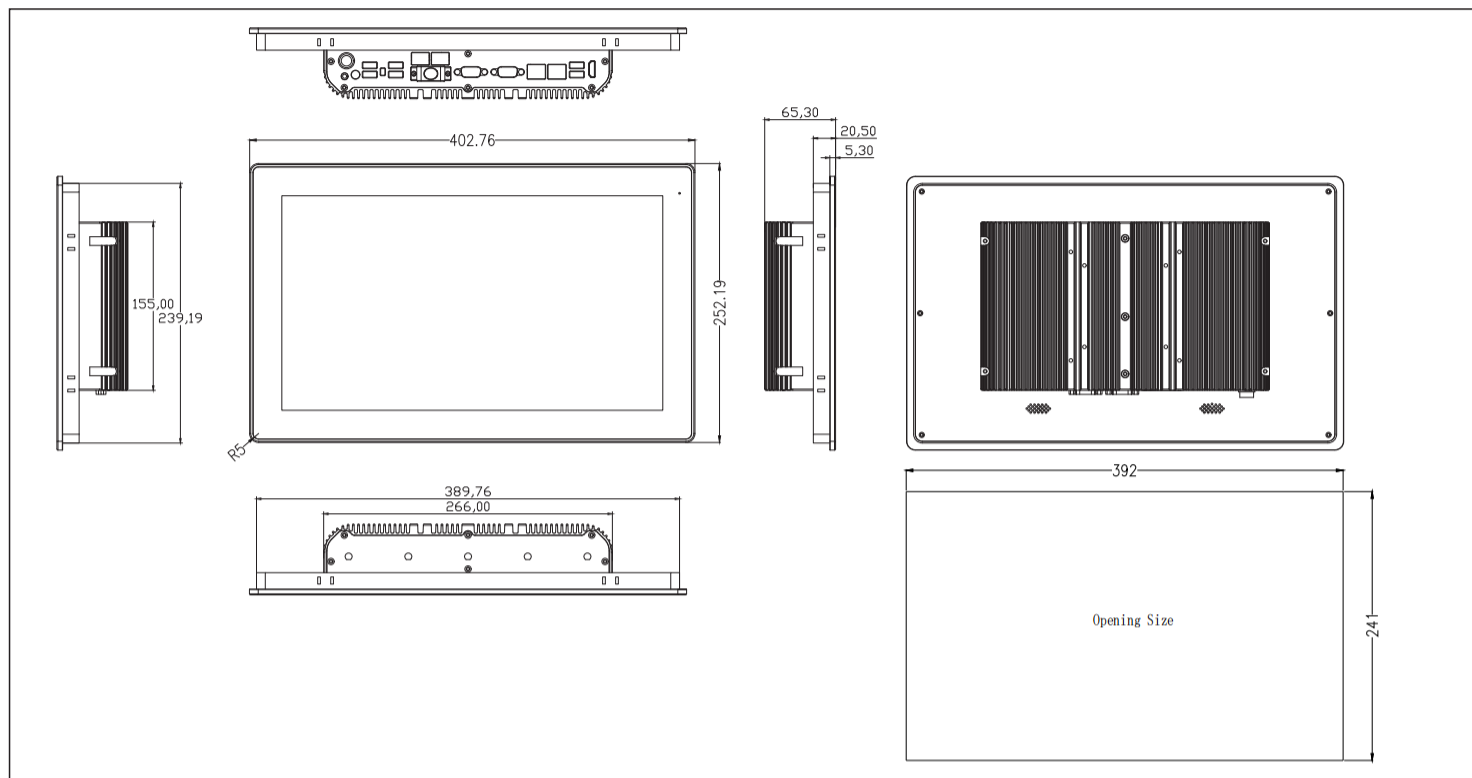

Model And Details	Description
HST-1506-J4125	15.6" TFT LCD J4125 CPU DDR4 SODIMM x1 2xUSB3.0,4x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-J6412	15.6" TFT LCD J6412 CPU DDR4 SODIMM x1 2xUSB3.0,4x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I5-8260U	15.6" TFT LCD i5-8260U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I5-8365U	15.6" TFT LCD i5-8365U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I7-8565U	15.6" TFT LCD i7-8565U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I7-8569U	15.6" TFT LCD i7-8569U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I5-10210U	15.6" TFT LCD i5-10210U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I5-10310U	15.6" TFT LCD i5-10310U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I7-10510U	15.6" TFT LCD i7-10510U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
HST-1506-I7-10610U	15.6" TFT LCD i7-10610U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter

Remarks:

- (1) If PC with Celeron CPU , it has 4*USB2.0 And 2*USB3.0; If PC withCore series CPU, it has 4*USB3.0 and 2*USB2.0 .
- (2)If PC with Celeron CPU, only 1*DDR4 slot; if PC with Core CPU,it has 2*DDR4 slots onboard.

Packing List

- HST-1506
- Power Supply
- Phoenix terminal
- Screw

Parts optional

- WIFI Module
- 3G/4G/5G Module