

MULTIBOX 150

Made of hot-pressed glass fibre reinforced polyester (GFP)
Two-part construction, equipment can be installed in either the shallow or deep part.
Stackable design for space saving storage and transport
Low flammability and self-extinguishing
4 mounting elements in stainless steel

- Colour: light gray
- EPDM seal
- Weight approx. 12kg
- UV-resistant
- Protection class IP65



For further technical details → data sheet [KDS10275](#) & [KDS10583](#)

Dimensions Height Width Depth
in mm (approx.) 750 x 520 x 430

Heat transition coefficient K	without window	with window
Without isolation	8.5 W/K	9.2 W/K
arctic-GRP	2.3 W/K	3.0 W/K

Designs (Locking-type see data sheet [KDS10370](#))

- ☐ **SV** 4 clasps in stainless steel (standard)
- ☐ **SE** 2 hinges and 2 clasps in stainless steel, with angle for optional padlock

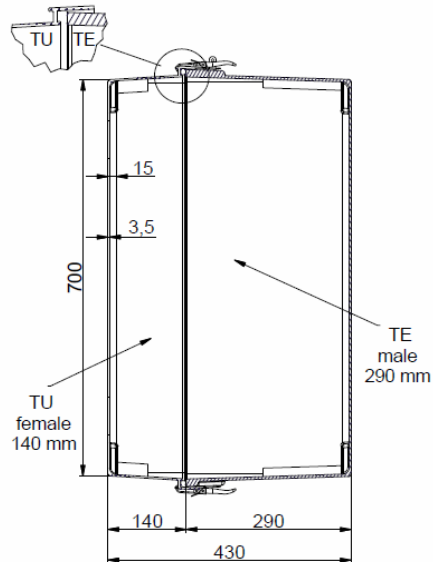

Lid Propstay (only design SE)

- ☐ **DF** in galvanized steel
- ☐ **DFVA** in stainless steel

- ☐ 1 pc.
- ☐ 2 pcs.

Window

- ☐ **FA** acrylic glass window
- ☐ **FS** safety glass window

- mounted in
- ☐ TE
- ☐ TU

arctic additional Insulation

PU-foam, not stackable

- ☐ **arctic-GRP** GRP in-liner

Explosion Protection

- ☐ **GO** antistatic to avoid electrostatic charges according to DIN EN IEC 60079-0
- ☐ **Ex p** preparation for pressurization according to DIN EN IEC 60079-2

Protection Class

- ☐ **IP66** ☐ **IP67** ☐ **IP68**
- ☐ **CSA Enclosure Type 4X (NEMA 4X)**

Vents and Drains (see data sheet [KDS10429](#))

- ☐ **LF** Labyrinth filter IP44
- ☐ **DV** Vents and Drains IP66

