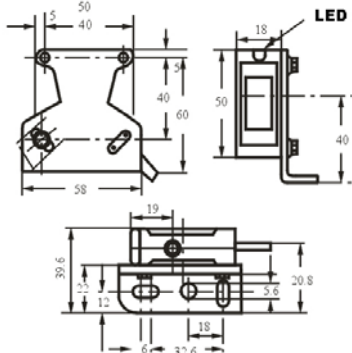


PHOTOELECTRIC SENSOR				
Structural category				Photoelectric switch
Outward appearance code				G50
Appearance				
Dimension				
Diffuse type	Detection distance			30cm 50cm
	DC 10 ~ 30 V	NPN	NO	3A30NA
			NC	3A30NB
			NO+NC	3A30NC
	V	PNP	NO	3A30PA
			NC	3A30PB
			NO+NC	3A30PC
	90~ 250 V AC	SRC Control label silicon	NO	2A30LA
			NC	
Relay output			2A30JC	
Retro	Detection distance			4m
	DC 10 ~	NPN	NO	3B4NA
			NC	3B4NB
			NO+NC	3B4NC
			NO	3B4PA

reflective	30	PNP	NC	3B4PB
	V		NO+NC	3B4PC
	90~	SRC Control label silicon	NO	2B4LA
	250		NC	
	V AC		Relay output	
Trough beam	Detection distance			5m
	DC 10~ 30 V	NPN	NO	3C5NA
			NC	3C5NB
			NO+NC	3C5NC
		PNP	NO	3C5PA
			NC	3C5PB
			NO+NC	3C5PC
	90~ 250 V AC	SRC Control label silicon	NO	2C5LA
			NC	
			Relay output	
DC/SCR Control output				DC:200mA , AC:300mA , relay:2A
DC/AC Consumption current				DC:<15mA , AC:<10mA
DC/AC Response time				DC:<2ms , AC:<20ms
Directional angle				3° - 10°
Detected object				transparent of opaque body
Working environment temperature				- 25℃~55℃
Intensity of illumination of working environment				
Shell material				Plastic
Protection grade				IEC standard IP54