


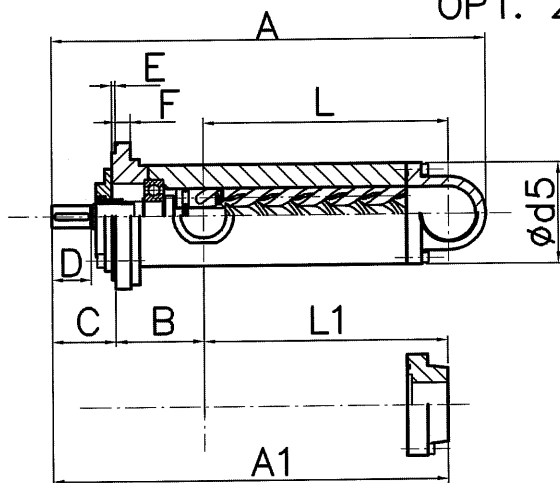
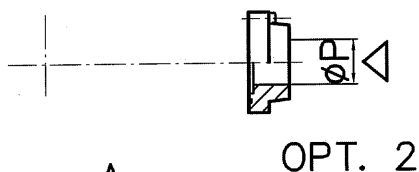



Screw pumps – PX series

For hydraulic oils, lubricating oils

Admissible delivery pressure (continuous) = 30 bar at 2900 rpm

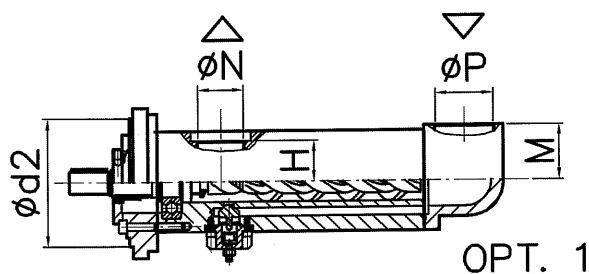


IN-OUT



<= PX055#

>= PX060#



* Pump casing and connection flange in aluminium alloy

Inlet flange adjustable to 90° and 180°.

Dimensional chart (mm)

SIZE	A	A1	B	C	D	E	F	H	L	L1	M	N	P	T	V	d1	d2	d3	d4	d5	d6
PX025#6...	310	294	65	47,5	25	5	10	32,5	178	181	42	3/4"	1"	16	5	14	100	125	150	80	11
PX032#4...	412	360	73	75	40	5	15	40,5	227	212	60	1 1/2"	2"	21,5	6	19	125	160	145	100	13
PX040#4...	440	390	73	75	40	5	15	40,5	256	241	60	1 1/2"	2"	21,5	6	19	125	160	145	100	13
PX045#4...	494	431,5	91,5	81	51	5	15	55,5	269	259	75,5	2"	2 1/2"	35	10	32	125	160	145	135	13
PX055#4...	534	472	91,5	82	51	5	15	55,5	308	298	75,5	2"	2 1/2"	35	10	32	125	160	145	135	13
PX060#4...	631	526,5	88	83,5	51	5	18	75	387	355	100	2 1/2"	4"	35	10	32	160	200	195	170	18
PX072#4...	717	613	88	101	65	5	18	75	455	424	100	2 1/2"	4"	35	10	32	160	200	195	170	18
* PX083#3...	785	N.D.	194	90	80	5	30	95,5	406	N.D.	118	4"	5"	48,5	14	45	250	315	365	180	26

SEIM srl
Via A. Volta 17
20090 Cusago (MI) ITALY
Tel. (+39) 02.90.39.21.1
Fax (+39) 02.90.39.21.41
e-mail: seim@seim.it

www.seim.it

SEIM reserves the right to introduce dimensional changes or variation to the products of this technical data

ZA - STE - PX - GB 06-02 - 1

Screw pumps – PX series

For hydraulic oils, lubricating oils

Admissible delivery pressure (continuous) = 30 bar at 2900 rpm

Main field of application:


Industrial purpose, low pressure range:

lubrication, cooling and auxiliary filtration systems



Section and components

Inspection flange
(Not on PX025)

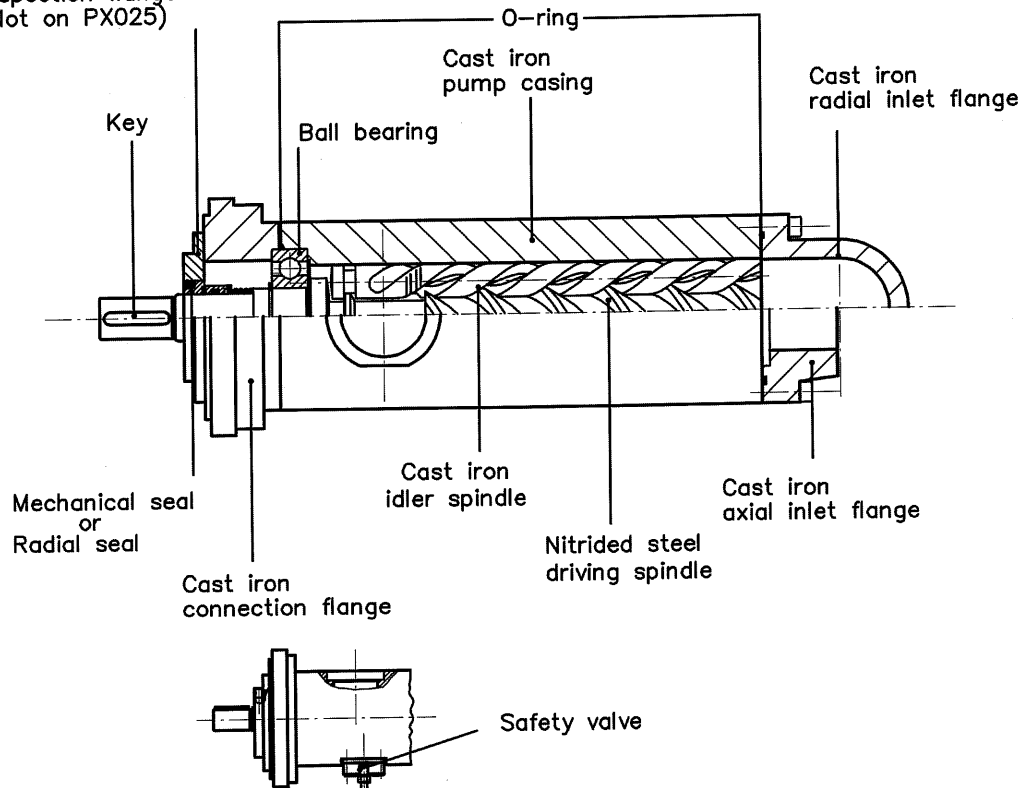

Functional characteristics standard version

Delivery flow	10 to 1500 l/min (2,6 to 396 USGPM)	
Admissible delivery pressure*	up to 30 bar (435 psi) continuous	
Admissible suction pressure	-0,5 to 10 bar (-7,3 to 145 psi)	For different values contact SEIM
Kinematic viscosity	10 to 400 cSt	For different values contact SEIM
Admissible temperature	0 to 120 °C (32 to 248 °F)	For different values contact SEIM
Driving speed	750 to 3600 rpm	
Average noise level	53 ± 68 dB(A) at 2900 rpm according to pump dimension	
Recommended filtration	60 micron max, suction side (not abrasive contaminant) ISO4406 19 / 16 – NAS 10	
Direction of rotation	clockwise, as seen from the driving side	
* Standard valve setting	mod. A: 0 – 7 bar (0 – 102 psi)	
	mod. B: 7 – 16 bar (102 – 232 psi)	

* Reduced pressure limits apply due to fluid viscosity and driving speed
Consult the performance charts for the individual pump size

For different functional characteristics, please contact our sales department