

FMS Tension Control / Force Sensors

LMGZ-Series Highly precise, stainless steel force measuring bearing

- **Wide measuring range with highest resolution**
Measuring range 100:1
Accuracy class $\pm 0.3\%$
- **For a wide range of applications**
7 sizes with nominal force from 33 to 25'000 N
(7.5 to 5'620 lbf.)
- **Robust and durable**
Overload protection up to 20-times nominal force, full stainless steel




LMGZ-Series

The force measuring bearings of the LMGZ-Series, designed for the measurement of tension on continuous material processing lines where live shaft idler rolls are utilized. The accuracy class of 0.3% and the measuring range of 100:1 allows reproducible, highly precise measurements throughout the industry. The mechanical overload protection of up to 20-times the nominal force provides unsurpassed robustness. With the superior performance of the LMGZ-Series, accurate tension readings are obtained even with low web wrap angles and high roll weights. For installations where a Pillow Block mount is required the optional bracket can be utilized.

Functional description


The LMGZ-Series force measuring sensor combines the bearing seat and the force sensor within the same housing, thus minimizing the required installation space. The substantial overload protection translates to eliminated/minimized calibration issues due to machine upset conditions. The movement of the bending beam, which is proportional to the applied force, is detected by strain gauges arranged in a full bridge circuit and then converted into an electrical signal. This simple measurement principle delivers precise results even with low material tension and small web wrap angles. The Red Point, as located on the sensor body, should be aligned with the direction of the resultant force due to web tension.

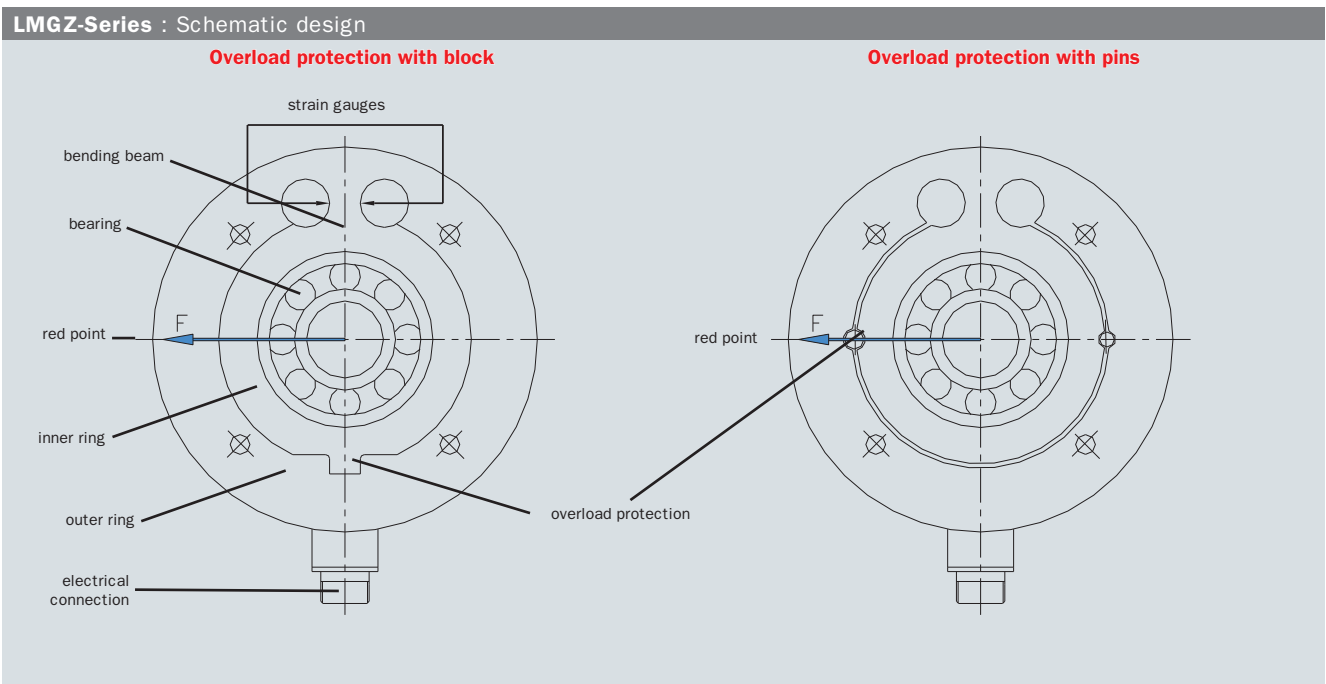


There are 2 design Types of overload protection devices: block or pins.

LMGZ-Series : Bearings						
Force Sensor	Suitable bearing (bearings must be ordered separate)					
Type	Type	Series	Dimensions mm (in.)			
			d	D	B	
LMGZ200	129	1	9 (0.3543)	26 (1.0236)	8 (0.3150)	
LMGZ201	1201	1	12 (0.4724)	32 (1.2598)	10 (0.3937)	
LMGZ203	1203	1	17 (0.6692)	40 (1.5748)	12 (0.4724)	
LMGZ204	1304	1	20 (0.7874)	52 (2.0472)	15 (0.5906)	
LMGZ205	1205	1	25 (0.9843)	52 (2.0472)	15 (0.5906)	
LMGZ307	1307	1	35 (1.3780)	80 (3.1496)	21 (0.8268)	
LMGZ308	1208	1	40 (1.5748)	80 (3.1496)	18 ¹⁾ (0.7087)	
LMGZ310	1310	1	50 (1.9685)	110 (4.3307)	27 (1.0630)	
	21310	2	50 (1.9685)	110 (4.3307)	27 (1.0630)	
LMGZ312	2212	1	60 (2.3622)	110 (4.3307)	28 ²⁾ (1.1024)	
	22212	2	60 (2.3622)	110 (4.3307)	28 ²⁾ (1.1024)	
LMGZ313	1313	1	65 (2.5591)	140 (5.5118)	33 (1.2992)	
	21313	2	65 (2.5591)	140 (5.5118)	33 (1.2992)	
LMGZ316	2216	1	80 (3.1496)	140 (5.5118)	33 (1.2992)	
	22216	2	80 (3.1496)	140 (5.5118)	33 (1.2992)	

1) distance ring, in scope
2) thinner clip ring, in scope

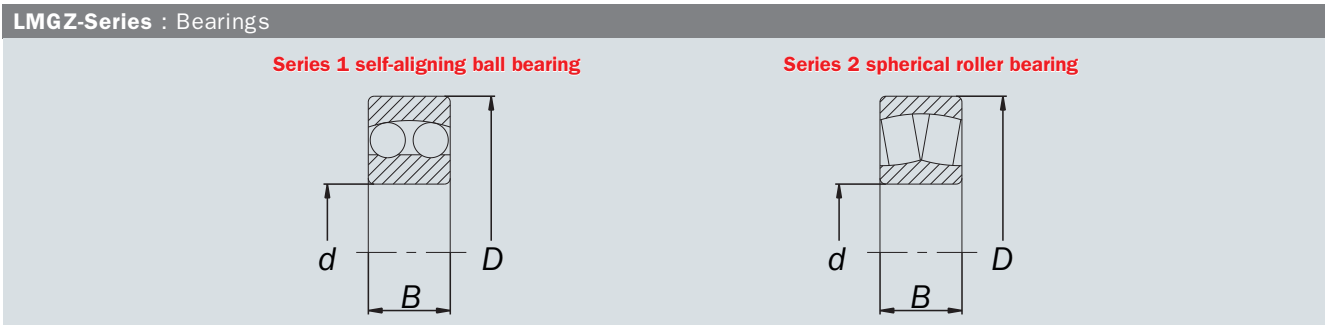

Various types of bearings can be utilised with an LMGZ series sensor. FMS recommends the use of self-aligning versions to compensate for shaft alignment errors and to avoid measuring inconsistencies.

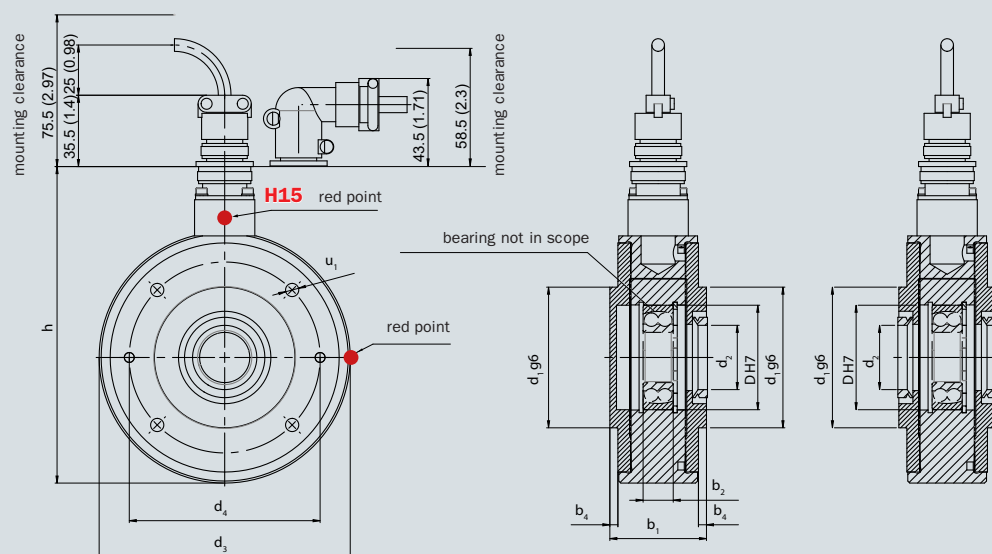LMGZ-Series : Dimensions in mm**LMGZ-Series : Dimensions**

Size Type	D mm (in.)	d1 mm (in.)	d2 mm (in.)	d3 mm (in.)	d4 mm (in.)	b1 mm (in.)	b2 mm (in.)	b4 mm (in.)	h mm (in.)	u mm (in.)
LMGZ 200	26 (1.02)	50 (1.97)	14 (0.55)	94 (3.70)	64 (2.52)	37 (1.46)	8 (0.31)	3 (0.12)	126 (4.96)	5.5 (0.22)
LMGZ 201	32 (1.26)	50 (1.97)	16 (0.63)	100 (3.94)	70 (2.76)	37 (1.46)	10 (0.39)	3 (0.12)	132 (5.20)	6.6 (0.26)
LMGZ 203	40 (1.57)	60 (2.36)	22 (0.87)	105 (4.13)	75 (2.95)	37 (1.46)	12 (0.47)	3 (0.12)	137 (5.39)	6.6 (0.26)
LMGZ 204	52 (2.05)	70 (2.76)	32 (1.26)	125 (4.92)	95 (3.74)	48 (1.89)	15 (0.59)	4 (0.16)	157.5 (6.20)	6.6 (0.26)
LMGZ 205	52 (2.05)	70 (2.76)	32 (1.26)	125 (4.92)	95 (3.74)	48 (1.89)	15 (0.59)	4 (0.16)	157.5 (6.20)	6.6 (0.26)
LMGZ 307	80 (3.15)	100 (3.94)	45 (1.77)	175 (6.89)	135 (5.31)	65.9 (2.59)	21 (0.83)	4 (0.16)	207.5 (8.17)	9 (0.35)
LMGZ 308	80 (3.15)	100 (3.94)	50 (1.97)	175 (6.89)	135 (5.31)	65.9 (2.59)	18 (0.71)	4 (0.16)	207.5 (8.17)	9 (0.35)
LMGZ 310	110 (4.33)	130 (5.12)	65 (2.56)	225 (8.86)	175 (6.89)	75.9 (2.99)	27 (1.06)	4 (0.16)	258 (10.16)	11 (0.43)
LMGZ 312	110 (4.33)	130 (5.12)	70 (2.76)	225 (8.86)	175 (6.89)	75.9 (2.99)	28 (1.10)	4 (0.16)	258 (10.16)	11 (0.43)
LMGZ 313	140 (5.51)	160 (6.30)	80 (3.15)	270 (10.63)	220 (8.66)	80.9 (3.19)	33 (1.30)	4 (0.16)	303.5 (11.95)	11 (0.43)
LMGZ 316	140 (5.51)	160 (6.30)	90 (3.54)	270 (10.63)	220 (8.66)	80.9 (3.19)	33 (1.30)	4 (0.16)	303.5 (11.95)	11 (0.43)

LMGZ-Series : Nominal forces, Deflection, Weight

Size Type	Nominal force N (lbf.)	Deflection mm (in.)	Weight kg (lbs.)
LMGZ 200	33, 50, 100 (7, 11, 22)	0.28 (0.0110)	1.7 (3.7)
LMGZ 201	50, 125, 250, 500 (11, 28, 56, 112)	0.32 (0.0126)	1.8 (4.0)
LMGZ 203	50, 125, 250, 500, 750, 1000 (11, 28, 56, 112, 169, 225)	0.32 (0.0126)	2.0 (4.4)
LMGZ 204	125, 200, 375, 750, 1500 (28, 45, 84, 169, 337)	0.38 (0.0150)	3.3 (7.3)
LMGZ 205	125, 200, 375, 750, 1500 (28, 45, 84, 169, 337)	0.38 (0.0150)	3.3 (7.3)
LMGZ 307	375, 750, 1500, 3000 (84, 169, 337, 674)	0.12 (0.0047)	9.1 (20.1)
LMGZ 308	375, 750, 1500, 3000 (84, 169, 337, 674)	0.12 (0.0047)	9.1 (20.1)
LMGZ 310	375, 750, 1'500, 3'000, 6'000, 12'000 ¹⁾ (84, 169, 337, 674, 1'349, 2'698 ¹⁾)	0.54 (0.0213) 0.12 (0.0047)	16.3 (35.9)
LMGZ 312	375, 750, 1'500, 3'000, 6'000, 12'000 ¹⁾ (84, 169, 337, 674, 1'349, 2'698 ¹⁾)	0.54 (0.0213) 0.12 (0.0047)	16.3 (35.9)
LMGZ 313	2'500, 5'000, 10'000, 25'000 ¹⁾ (562, 1'124, 2'248, 5'620 ¹⁾)	0.54 (0.0213) 0.12 (0.0047)	24.0 (52.9)
LMGZ 316	2'500, 5'000, 10'000, 25'000 ¹⁾ (562, 1'124, 2'248, 5'620 ¹⁾)	0.54 (0.0213) 0.12 (0.0047)	24.0 (52.9)

1) Types available only in H15 version

LMGZ-Series : Technical data	
Sensitivity	1.8 mV / V
Tolerance of sensitivity	< ±0.2 %
Accuracy class	± 0.3 % (F _{Nom})
Measuring range	100:1
Temperature coefficient	± 0.1 % / 10 K
Temperature range	-10 to +60 °C (14 F to 140 F)
Protection class	IP42
Input resistance	350 Ω
Power supply	1 to 7 VDC
Overload protection	20-times nominal force
Axial load	20% nominal force
Sensor material	Stainless steel

LMGZ-Series : Order code	
LMGZ	201 .125 .12 .H13.H16
	Options
	Shaft diameter in mm
	Nominal force rating
	Size
	Series


LMGZ-Series : Options	
H13	open covers for both sides, additional scope of supply 1 pcs. V-ring
H14	right-angle connector in scope of supply, replaces straight connector
H15	connector offset 90°, red point on connector side
H16	temperature range up to 120°C (248°F)
H18	with water tight, straight connector, replaces original connector
H19	grease nipple
H21	electrical connection with PG gland with 5 m (16.4 ft.) cable, replaces connector
H29	resistant against aggressive media, especially acids (please specify), up to 120°C (248°F)
H30	resistant against aggressive media, especially hydrocarbons (please specify) up to 120°C (248°F)
H31	for vacuum applications to 1E-7 hPa 1E-5 Torr, temperature range up to 120°C (248°F)
H32	vacuum to 1E-7 hPa 1E-5 Torr, up to 150°C (302°F), with pg-gland and 5 m (16.4 ft.) cable
H33	temperature range up to 150°C (302°F), with pg-gland and 5 m (16.4 ft.) cable

LMGZ-Series : Scope of supply	
● force sensor ● straight connector (female) ● open cover ● closed cover ● V-ring ● clip ring ● distance ring (for narrower bearing) ● thinner clip ring (for wider bearing)	

LMGZ-Series : Accessories	
● bearing ● installation bracket ● prefabricated cable (specify length) with connector (straight or right-angle)	

GMGZ-Installation brackets

When it is not conducive to mount the sensors directly onto the machine frame, the GMGZ Series supports are available for all sizes of LMGZ sensors. They are made of durable cast iron and can either be supplied blank (customer drills the sensor mounting holes in them to optimise the positioning of the sensor) or with a 360° clock-wise pattern of pre-drilled mounting holes. Mounting positions between 1 and 2 are not possible as the support foot interferes with the sensor connector.

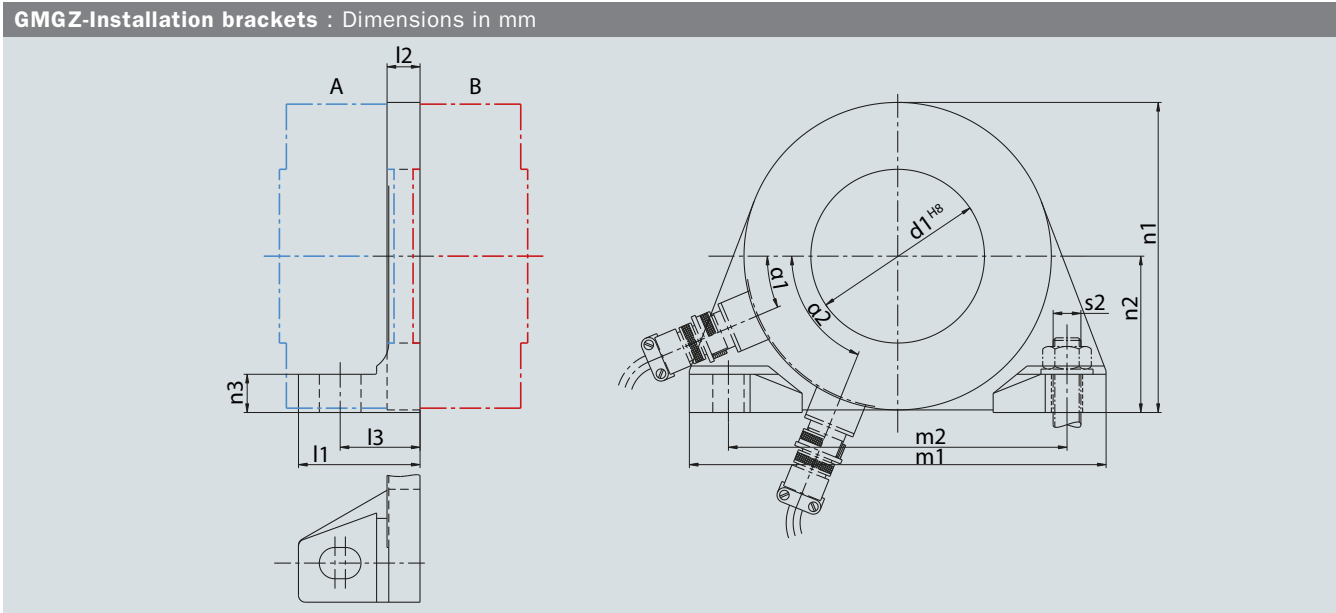

GMGZ-Series : Dimensions													
Force Sensor	Suitable support	Weight	Dimensions GMGZ-installation brackets (mm)										
Type	Type	kg	d1 mm	l1 mm	l2 mm	l3 mm	m1 mm	m2 mm	n1 mm	n2 mm	n3 mm	s2	α 1 bis α 2
LMGZ200 LMGZ201	GMGZ 201	0.8	50	40	10	25.25	140	115	109.5	56	12	M8	17° bis 74°
LMGZ203	GMGZ 203	0.8	60	40	10	25.25	140	115	109.5	56	12	M8	17° bis 74°
LMGZ204 LMGZ205	GMGZ 205	1.4	70	45	12	31.75	170	140	130.5	67	16	M10	20° bis 69°
LMGZ307 LMGZ308	GMGZ 307	4.5	100	70	20	46.5	240	195	178.5	90	22	M16	22° bis 60°
LMGZ310 LMGZ312	GMGZ 310	9.0	130	90	25	58	290	240	232	118	28	M20	28° bis 65°
LMGZ313 LMGZ 316	GMGZ 313	11.8	160	100	25	62.5	340	290	274	141	28	M20	28° bis 65°

GMGZ-Series : Dimensions													
Force Sensor	Suitable support	Weight	Dimensions GMGZ-installation brackets (in.)										
Type	Type	(lbs.)	d1 (in.)	l1 (in.)	l2 (in.)	l3 (in.)	m1 (in.)	m2 (in.)	n1 (in.)	n2 (in.)	n3 (in.)	s2	α 1 bis α 2
LMGZ200 LMGZ201	GMGZ 201	(1.8)	(1.87)	(1.57)	(0.39)	(0.99)	(5.51)	(4.53)	(4.29)	(2.20)	(0.47)	M8	17° bis 74°
LMGZ203	GMGZ 203	(1.8)	(2.36)	(1.57)	(0.39)	(0.99)	(5.51)	(4.53)	(4.29)	(2.20)	(0.47)	M8	17° bis 74°
LMGZ204 LMGZ205	GMGZ 205	(3.1)	(2.76)	(1.77)	(0.47)	(1.25)	(6.69)	(5.51)	(5.12)	(2.64)	(0.63)	M10	20° bis 69°
LMGZ307 LMGZ308	GMGZ 307	(9.9)	(3.94)	(2.76)	(0.79)	(1.83)	(9.45)	(7.68)	(7.01)	(3.54)	(0.87)	M16	22° bis 60°
LMGZ310 LMGZ312	GMGZ 310	(19.8)	(5.12)	(3.54)	(0.98)	(2.28)	(11.42)	(9.45)	(9.13)	(4.65)	(1.10)	M20	28° bis 65°
LMGZ313 LMGZ 316	GMGZ 313	(26.0)	(6.30)	(3.94)	(0.98)	(2.46)	(13.39)	(11.42)	(10.63)	(5.55)	(1.10)	M20	28° bis 65°



Other products : Tension Control		
Measuring Amplifiers	Tension Controllers	Intrinsically Safe Barrier
		

About us
FMS Force Measuring Systems AG is the market leader in the field of web tension measurement, control and specialist for web guiding solutions. For the wire industry we are the only manufacturer offering a complete range of technologies for force measurement, data processing and radio transmission of signals.

Our in house developed products are used in the manufacturing industry, converting, metals, paper, textiles, as well as in cable and wire rope production. Utilising the latest technology, high quality components and a firm understanding of customer applications, FMS supports customers worldwide in the effort to maximize the productivity of their machines. Since 1993, our highly qualified employees have been creating high-end solutions for machine builders and plant operators. As an owner-managed company, we pride ourselves on being personal and approachable with the ability to make decisive moves fast.

World Headquarters: FMS Force Measuring Systems AG
Aspstrasse 6 • 8154 Oberglatt (Switzerland) • Phone + 41 44 852 80 80 • Fax + 41 44 850 60 06
info@fms-technology.com • www.fms-technology.com