

VE135 Series

Piezo Velocity Sensor, Top Exit 2 Pin Connector, 500 mV/in/sec, $\pm 10\%$



VIBRATION ANALYSIS HARDWARE



Product Features


500 mV/in/sec (20 mV/mm/sec) Sensitivity

- ▶ ± 10 in/sec, Peak Dynamic Range
- ▶ 2 Pin MIL Connection or Integral Option
- ▶ Integrates to Velocity in the Sensor

VE135-1A

2 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

VE135-2C

Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

VE135-3C

Armored Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

VE135-6C

Heavy Duty Armored Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	VE135	M/ or M8/VE135	Environmental		
Sensitivity ($\pm 10\%$)	500 mV/in/sec		Operating Temperature Range	-58 to 250 °F	-50 to 121 °C
Frequency Response ($\pm 3dB$)	60-600,000 CPM	1,0-10000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response ($\pm 10\%$)	120-300,000 CPM	2,0-5000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 10 in/sec. pk *Vsource $\geq 22V$, 12Vbias		Sealing	Welded, Hermetic	
Electrical			Submersible Depth	200 ft.	60 m
Settling Time	<4 Seconds		Physical		
Voltage Source (IEPE)	18-30 VDC		Sensing Element	PZT Ceramic	
Constant Current Excitation	2-10 mA		Sensing Structure	Shear Mode	
Spectral Noise @ 10 Hz	200 μ IPS/ $\sqrt{Hz}$		Weight	3.2 oz	90 grams
Spectral Noise @ 100 Hz	6 μ IPS/ $\sqrt{Hz}$		Case Material	316L Stainless Steel	
Spectral Noise @ 1000 Hz	0.7 μ IPS/ $\sqrt{Hz}$		Mounting Thread	1/4-28 Blind Tapped Hole	
Output Impedance	<100 ohm		Connector (Non-Integral)	2 Pin MIL-C-5015	
Bias Output Voltage	10-14 VDC		Resonant Frequency	1,320,000 CPM	22000 Hz
Case Isolation	>10 ⁸ ohm		Mounting Torque	2 to 5 ft. lbs	2,7 to 6,8 Nm
			Mounting Hardware Supplied	1/4-28 Stud	M6x1 or M8x1.25 Adapter Stud
			Calibration Certificate	CA10	

Typical Frequency Response

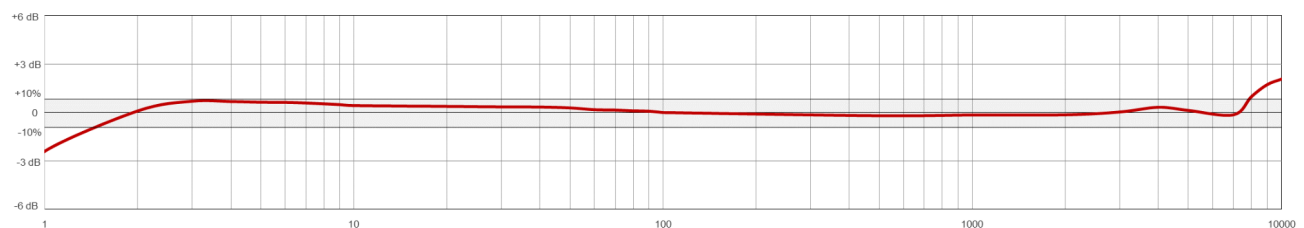

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900