

TG400 - Limit thermostat, screwdriver adjustment and manual reset




- "Compensated" versions available on request.
- Contact rating 16 (4) A 250Vca, with gold plated contacts 100mV $\approx$ 0,3 A.
- Gold-plated contact versions available on request.

CODE	ADJUSTMENT RANGE/ CALIBRATION	CONTACTS		BULB		CAPILLARY		PACK QTY
		ON/OFF	ON/OFF + service	dimensions mm	material	mm	material	
961-11228-00A *	90 ÷ 110 °C	•		Ø 6,5 x 73	Cu	1000	Cu + PVC	20
961-11328-00A	90 ÷ 110 °C		•	Ø 6,5 x 73	Cu	1000	Cu + PVC	20
961-11338-V0A	90 ÷ 110 °C	•		Ø 6,5 x 73	Cu	1500	Cu + PVC	20
963-11328-V0A *	90 ÷ 110 °C		Gold plated	Ø 6,5 x 73	Cu	1000	Cu + PVC	20
963-11338-00A	90 ÷ 110 °C		Gold plated	Ø 6,5 x 73	Cu	1500	Cu + PVC	20
963-11338-03A	70 ÷ 110 °C		Gold plated	Ø 5 x 90	Cu	1500	Cu + PVC	20
961-90328-00A *	70 ÷ 90 °C	•		Ø 6,5 x 73	Cu	1000	Cu + PVC	20
961-90338-00A *	70 ÷ 90 °C	•		Ø 6,5 x 73	Cu	1500	Cu + PVC	20
963-90328-00A *	70 ÷ 90 °C		Gold plated	Ø 6,5 x 73	Cu	1000	Cu + PVC	20
963-90338-00A	70 ÷ 90 °C		Gold plated	Ø 6,5 x 73	Cu	1500	Cu + PVC	20
FLUE GAS SAFETY LIMITER VERSION - WITH WASHER AND PLATE FOR BULB FIXING								
961-11338-20B *	70 ÷ 110 °C	•		Ø 5 x 90	Cu	1500	Cu + PVC	20
963-11338-20B *	70 ÷ 110 °C		Gold plated	Ø 5 x 90	Cu	1500	Cu + PVC	20

* price and delivery time upon request.

CE 0497

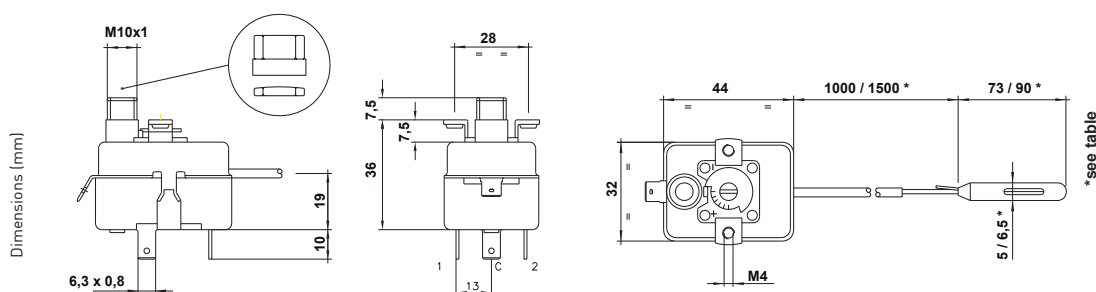

TG400 - Limit thermostat with fixed calibration without failure safe function



CODE	ADJUSTMENT RANGE/ CALIBRATION	RESET	CONTACTS		BULB		CAPILLARY		PACK QTY
			ON/OFF	ON/OFF + service	dimensions mm	material	mm	material	
991-30327-00A *	300 °C	manual		•	Ø 3 x 190	SST	1000	SST	20

* price and delivery time upon request.

- Contact rating 16(4)A 250Vca.

CE 0497

