



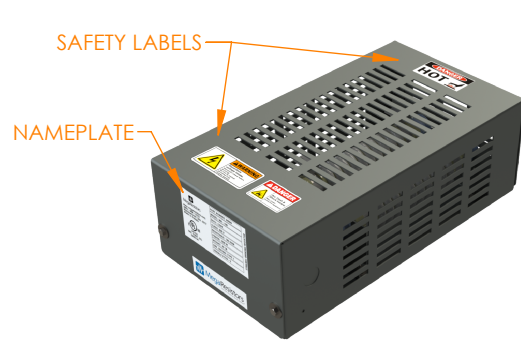


ISOMETRIC VIEW
(FULLY ASSEMBLED)

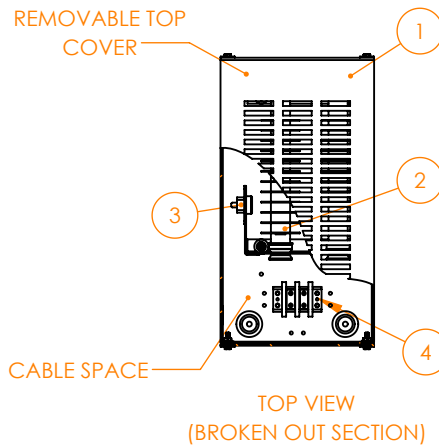


CABLE SPACE

TOP VIEW
(BROKEN OUT SECTION)




SIDE VIEW [L]

7/8 in (22 mm) KNOCKOUT
FOR CABLE ENTRY

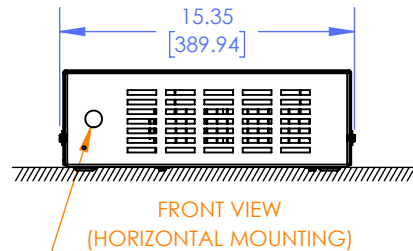


FRONT VIEW
(HORIZONTAL MOUNTING)




SIDE VIEW [R]

RECOMMENDED CLEARANCE:
ENSURE VENTILATION

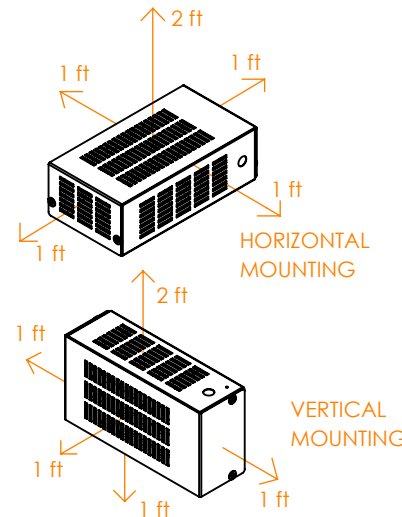


HORIZONTAL
MOUNTING

VERTICAL
MOUNTING

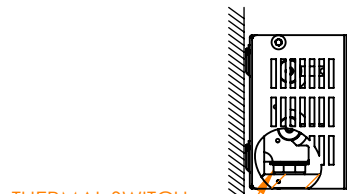

THERMAL SWITCH
MUST BE AT BOTTOM

SIDE VIEW [R]
(VERTICAL MOUNTING)

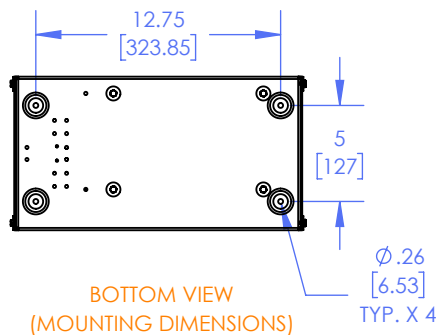

BOTTOM VIEW
(MOUNTING DIMENSIONS)


ITEM NO.	DESCRIPTION	QTY.
1	DB2 Type 1 Galv. Steel Enclosure (Optional Powder Coat)	1
2	Resistor Element	X
3	Normally Closed Thermal Switch	0-1
4	Terminal Block	0-1

ELECTRICAL CONNECTIONS:


THERMAL SWITCH (OPTIONAL)



NORMALLY CLOSED
OPENS AT 250°F (121°C)
RATED FOR 25 A MAX
UNINSULATED FEMALE QUICK DISCONNECT



TERMINAL BLOCK (OPTIONAL)

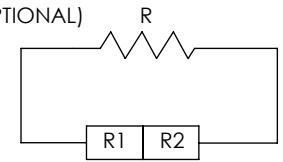

R1 - R2 = X Ω - 0%/+10% AT 20°C
2 POLE, 600 V, NOT POLARITY SPECIFIC

FOR 1-33 AMP RESISTORS

WITH #10-32 BINDER HEAD SCREW: #10-16 AWG CU
WITH RING OR FORK LUG: #6-16 AWG CU
MAX TORQUE RATING: 20 lb-in

FOR 33-100 AMP RESISTORS

WITH #10-32 BINDER HEAD SCREW:
#2-14 AWG CU / #8 AWG AL
MAX TORQUE RATING: #2-3 = 50 lb-in, #4-6 = 45 lb-in,
#8 = 40 lb-in, #10-14 = 35 lb-in