

Control Unit **SKS-1/2-02**

Pneumatical two-stage-circuit with adjustable pressure point, adjustable filling charactaristics and automatically condensate drain.

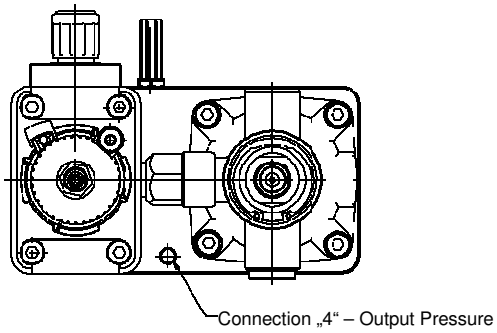

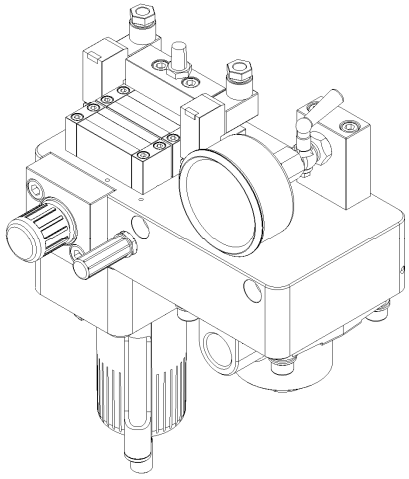

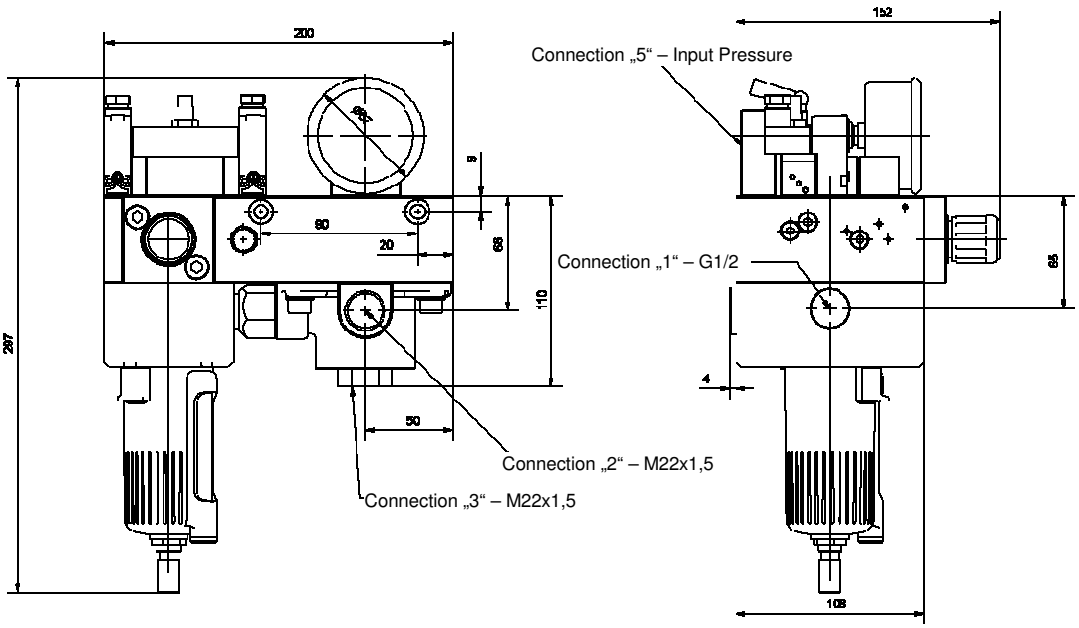

N

Technical Datas:	
pneumatical	
Inlet pressure	max. 16 bar
Control pressure	max. 16 bar
Ambient	-10℃ bis +50℃
Medium temperature	-10℃ bis +50℃
Connecting thread	G1/2 bzw. M22x1,5
Fixing	2 through holes for Srews DIN912-M10
Mounting position	Horizontal
Electrical	
Coil voltage	24 VDC ± 20%
Power consumtion	1,7 W
Mode after VDE 0580	Continuous (S1)
Protection category after EN 60529/VDE 0470	IP00 bzw. IP65 with coupling in the iserted and secured
Electrical connection	Female connector Form C, 9,4mm contact spacing
Manual override	Tap and turn with detent
Weight	5 Kg

Accessories / Spare Parts			
Position	*Designation*	*Features*	*Order number*
Accessories:			
1	Coupling socket	Form C - 9,4mm KA	1834484050
Spare Parts:			
2	3/2-way solenoid valve	24VDC 1,7 W LED	SKS-1/2-02-06
3	5/2-way valve	M5	A820223011
4	Manometer	0-16 bar	1827231039
5	Hahn 90°-fixed	Ms G1/4	SKS-1/2-02-08
6	Filter	NL 4 - 5µm	1829207070
7	Filter mounting kit	NL 4	1827009613
8	Silencer	G1/8	1827000000
9	Condensate tank with drain	automatically	1827009344
10	Cap	Plastic	1823317003
11	Valve Assembly	Kit (incl. 1/2/8)	SKS-1/2-02-20
12	DRV-Assembly	Kit	SKS-1/2-02-21
13	Pressure Valve Assembly	Kit	SKS-1/2-02-22
14	Seal-Kit	for Pos. 3	SKS-1/2-02-23
15	Piston Seal Set	Repair-Set	SKS-1/2-02-24



:

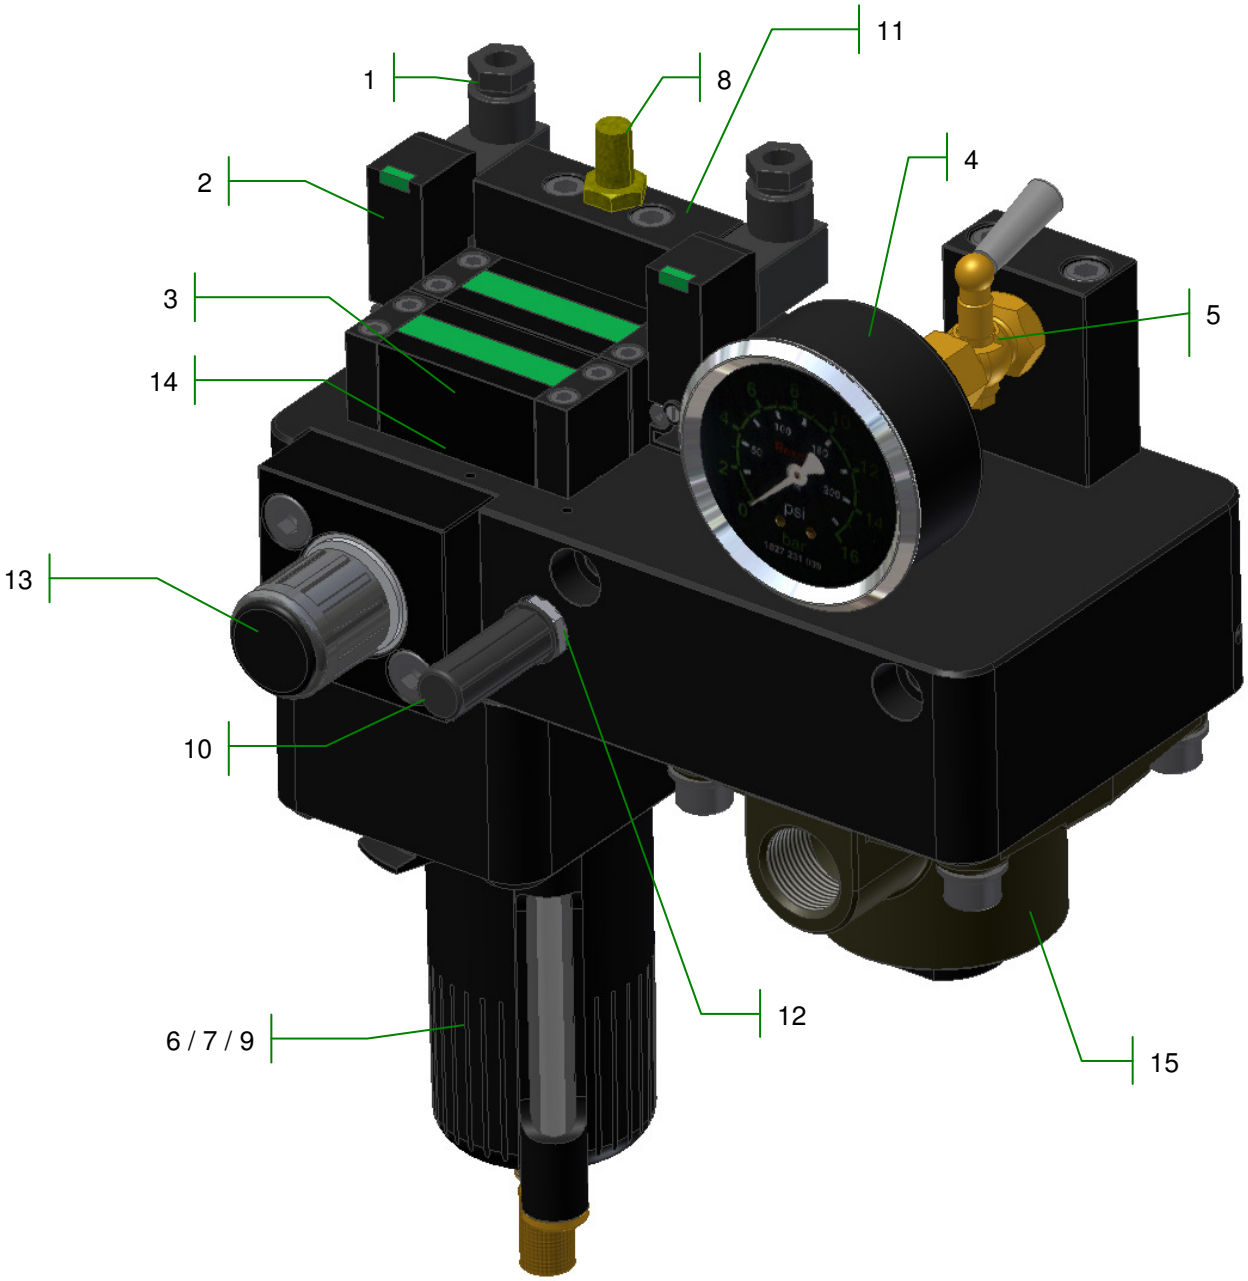
1
8
11
2
4
3
5
14
13
10
12
6 / 7 / 9
15