

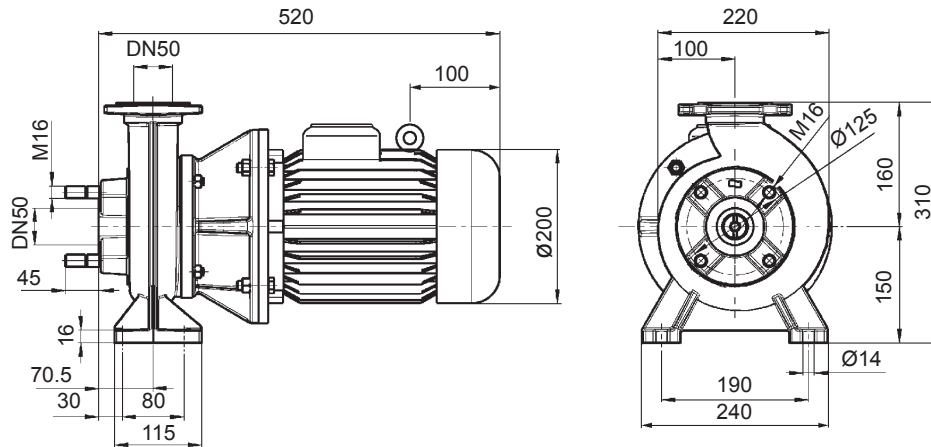


6572635	PUMP S30 (380-690 V / 50 HZ, 440-480 V / 60 HZ)
6572636	PUMP S30 (600 V / 60 HZ)
6572637	PUMP S30 (690 V / 60 HZ)

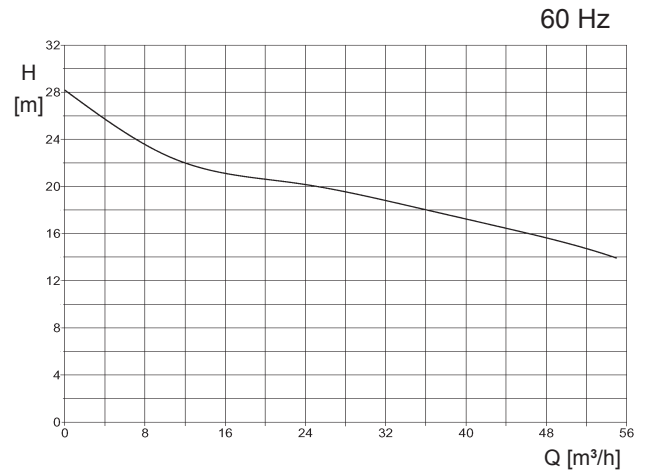

Capacity

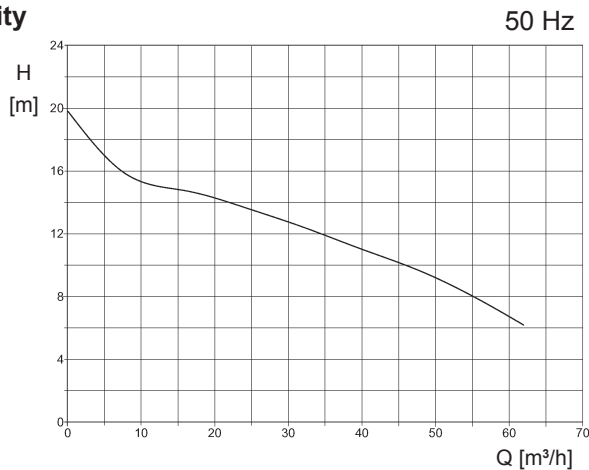

Electrical data

Evac motor P/N	Nominal Power	Voltage	Frequency	Nominal current	RPM	Protection	Insulation	Efficiency
6572635	3.0 kW	380-420 V	50 Hz	6.5 A	2930	IP55	F	IE3
6572635	3.0 kW	690 V	50 Hz	6.5 A				
6572635	3.6 kW	440-480 V	60 Hz	4.0 A	3540			
6572636	3.6 kW	600 V	60 Hz	4.6 A				
6572637	3.6 kW	690 V	60 Hz	4.0 A				

Operating data Ambient temperature: +55°C

Materials Pump casing and interstage casing: Cast iron EN-GJL-250(GG-25)
Impeller: Cast iron EN-GJL-250(GG-25)
Shaft: Stainless steel SIS 2350(AISI 316Ti)
Impeller nut: Copper alloy UNS 38500
Metal seals: Carbon stainless steel

Other Impeller: Ø120

Shipping data Net weight: 59 kg