P 510 302/P 510 502/P 520 302/P 520 502



P 510 302
P 510 502



P 520 302
P 520 502



Pneumatically actuated 5/2-way spool valve.

Type 510:
Actuated by permanent signal and equipped with air spring return.
Normally open from 1 to 2 and from 4 to 5.
If pressure is applied at 14 the valve is open from 1 to 4 and 2 to 3.
Operating pressure and actuating pressure should be at the same level.

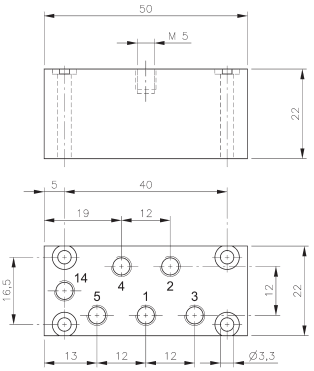

P 510 302

Type 520:
Pneumatically actuated 5/2-way spool valve actuated by impulse.
If signal is applied to 14 the valve is open from 1 to 4 and 2 to 3, 5 is closed.
If signal is applied to 12 the valve is open from 1 to 2 and 4 to 5.
Position is kept until next pneumatic signal is applied.

5/3-way centre closed version type P 531 302 available on request.



Exhaust can be throttled.

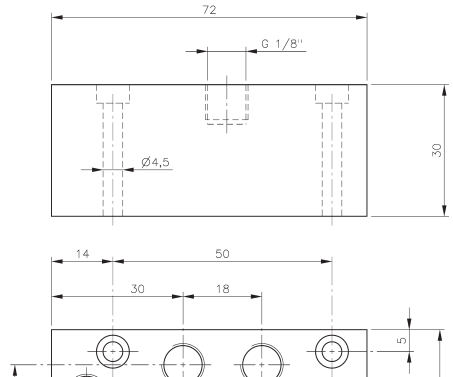

P 510 502

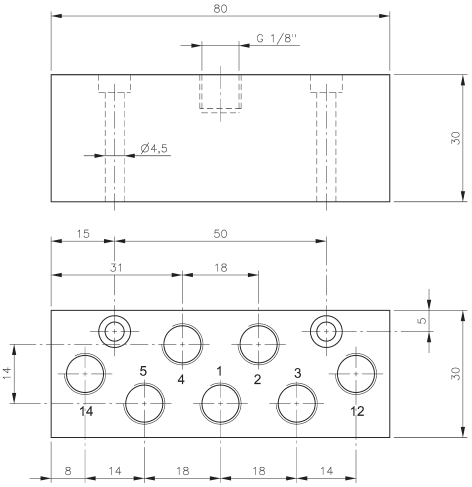

P 520 502

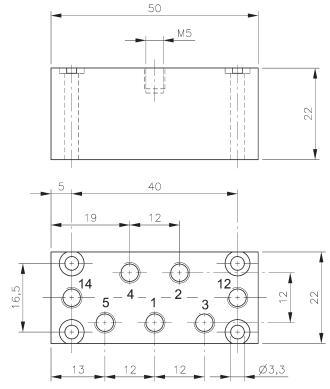

P 520 302

Type	Port size	Air flow	Operating press.	Actuating press.	Weight	
P 510 302	M5	180 l/min	2 - 10 bar	the same	0,07 kg	
P 510 502	G 1/8“	650 l/min	2 - 10 bar	the same	0,17 kg	Ex
P 520 302	M5	180 l/min	1 - 10 bar	2 - 10 bar	0,07 kg	
P 520 502	G 1/8“	650 l/min	1 - 10 bar	2 - 10 bar	0,17 kg	Ex