


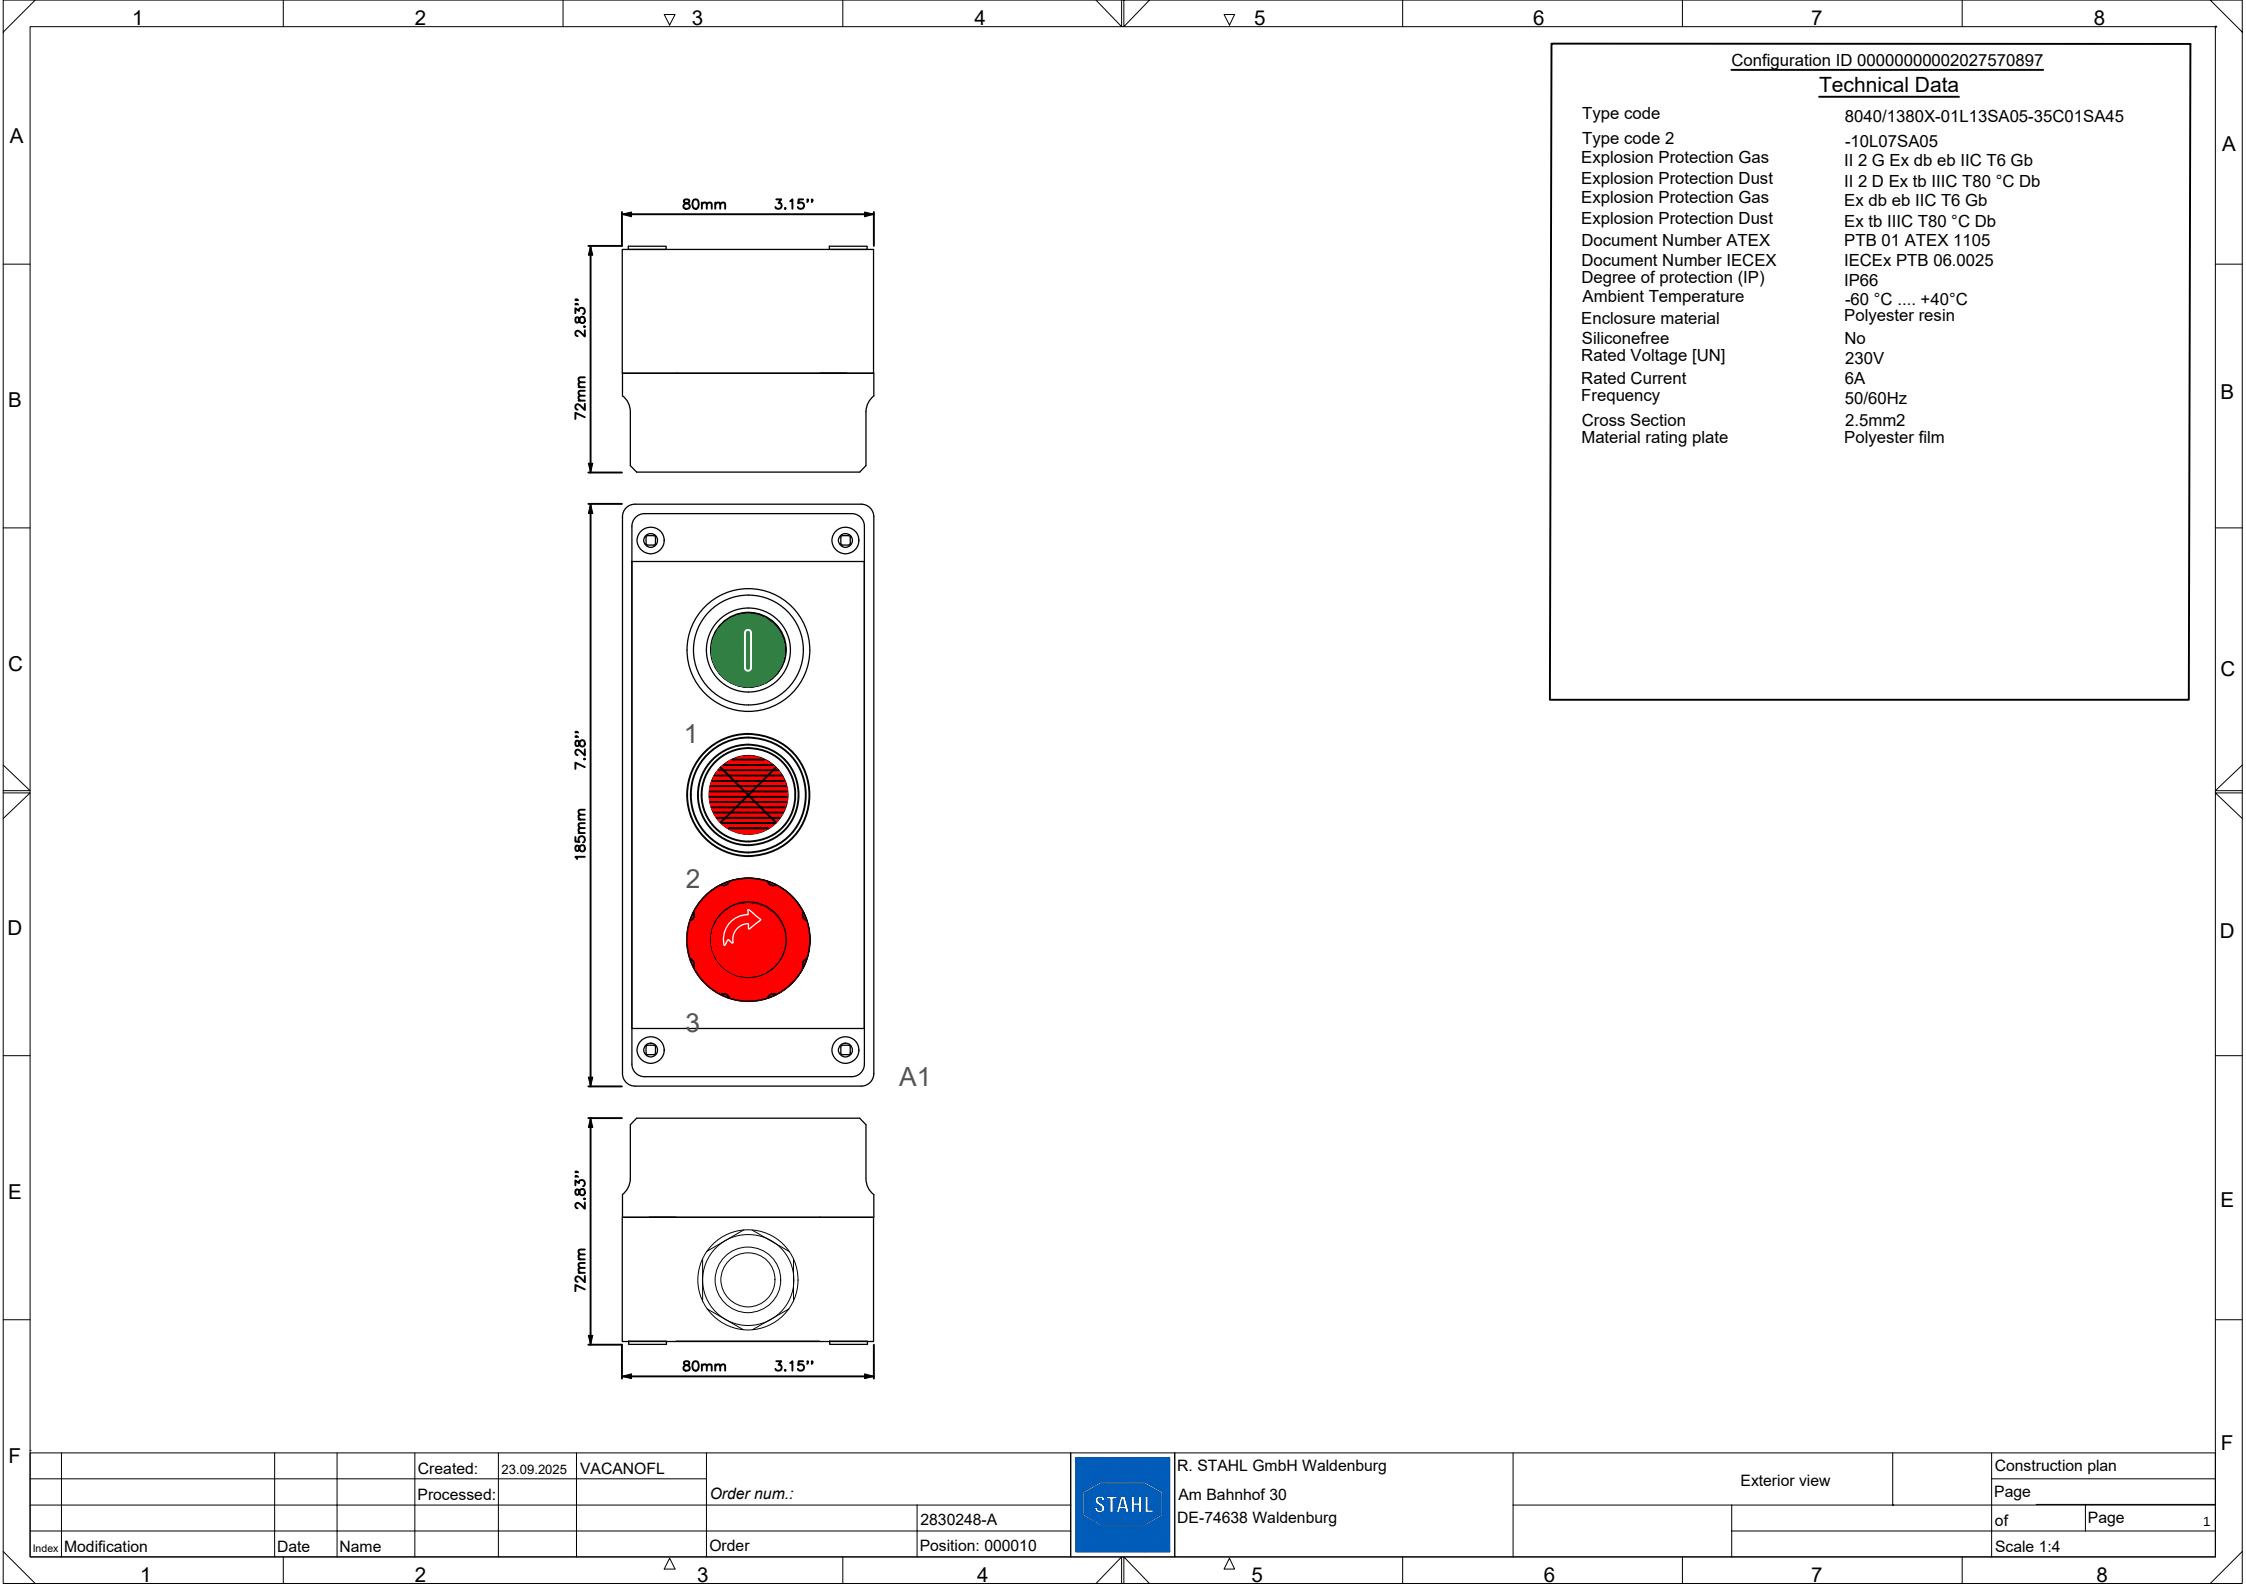


Configuration ID 00000000002027570897

Technical Data

Type code	8040/1380X-01L13SA05-35C01SA45
Type code 2	-10L07SA05
Explosion Protection Gas	II 2 G Ex db eb IIC T6 Gb
Explosion Protection Dust	II 2 D Ex tb IIIC T80 °C Db
Explosion Protection Gas	Ex db eb IIC T6 Gb
Explosion Protection Dust	Ex tb IIIC T80 °C Db
Document Number ATEX	PTB 01 ATEX 1105
Document Number IECEx	IECEx PTB 06.0025
Degree of protection (IP)	IP66
Ambient Temperature	-60 °C +40°C
Enclosure material	Polyester resin
Siliconfree	No
Rated Voltage [UN]	230V
Rated Current	6A
Frequency	50/60Hz
Cross Section	2.5mm2
Material rating plate	Polyester film

A1

				Created:	23.09.2025	VACANOFL				R. STAHL GmbH Waldenburg Am Bahnhof 30 DE-74638 Waldenburg	Exterior view				Construction plan		
				Processed:			Order num.:								Page		
							2830248-A								of	Page	1
Index	Modification	Date	Name				Order				Position: 000010						Scale 1:4

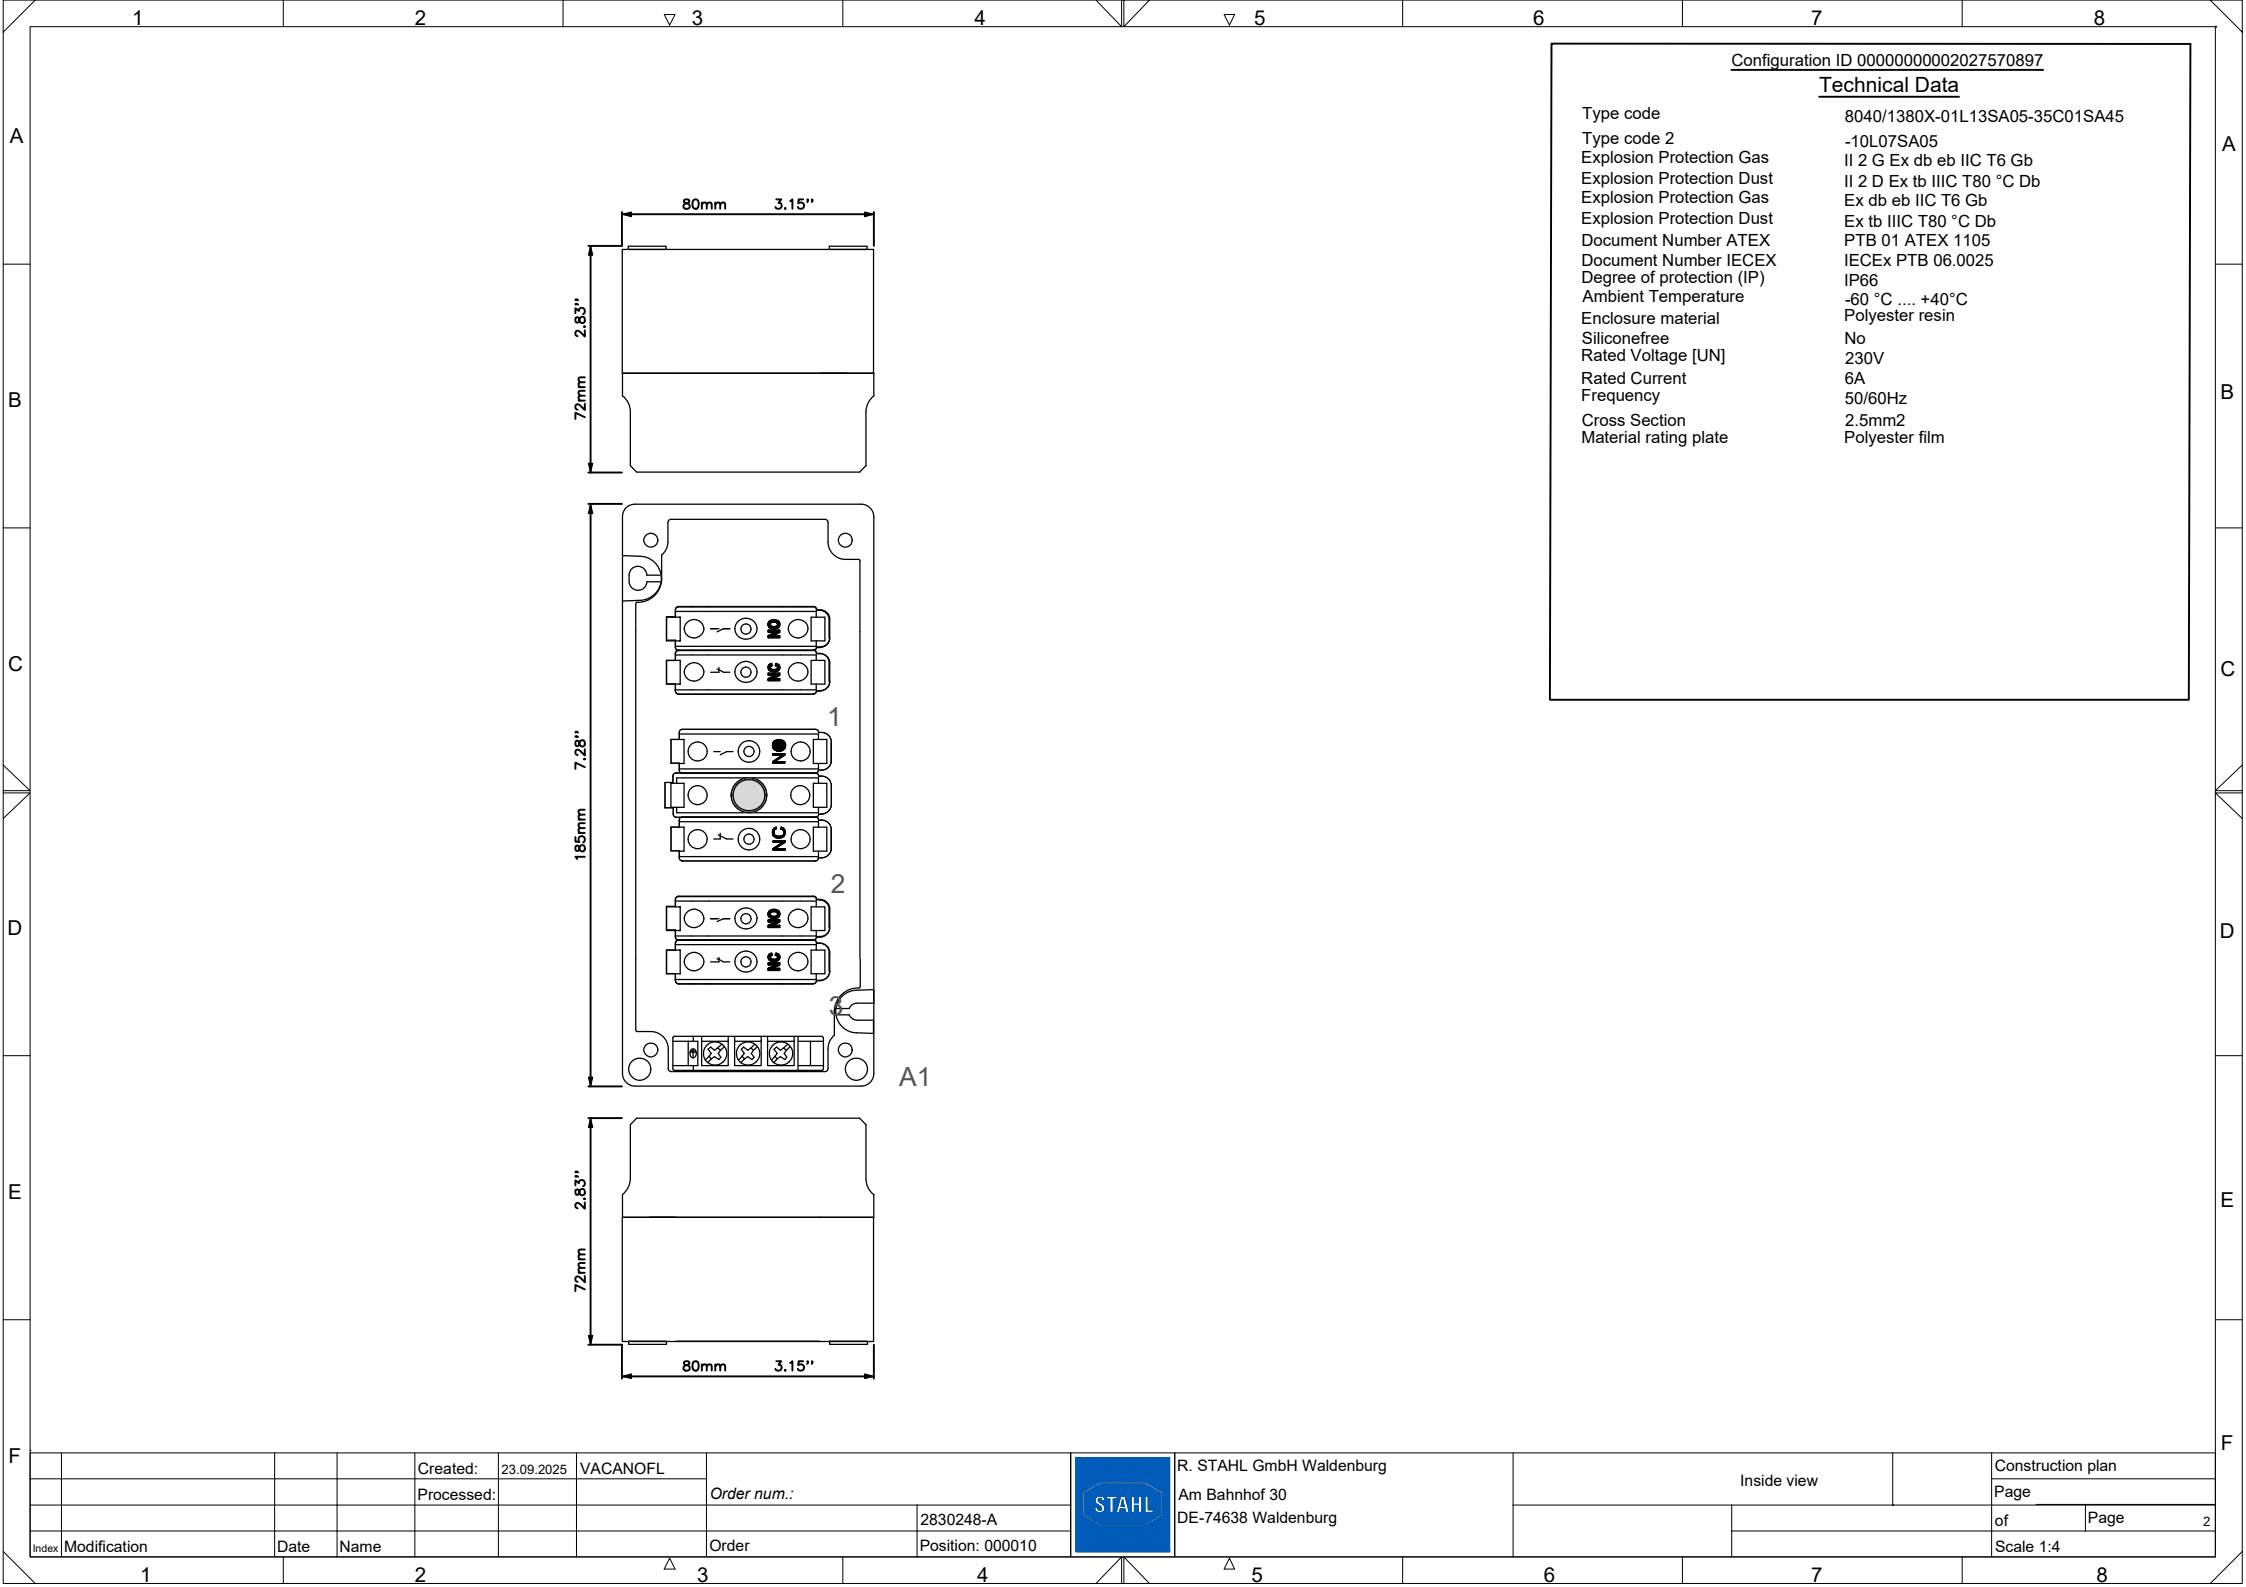

Configuration ID 0000000002027570897

Technical Data

Type code	8040/1380X-01L13SA05-35C01SA45
Type code 2	-10L07SA05
Explosion Protection Gas	II 2 G Ex db eb IIC T6 Gb
Explosion Protection Dust	II 2 D Ex tb IIIC T80 °C Db
Explosion Protection Gas	Ex db eb IIC T6 Gb
Explosion Protection Dust	Ex tb IIIC T80 °C Db
Document Number ATEX	PTB 01 ATEX 1105
Document Number IECEx	IECEX PTB 06.0025
Degree of protection (IP)	IP66
Ambient Temperature	-60 °C +40°C
Enclosure material	Polyester resin
Siliconfree	No
Rated Voltage [UN]	230V
Rated Current	6A
Frequency	50/60Hz
Cross Section	2.5mm2
Material rating plate	Polyester film

				Created:	23.09.2025	VACANOFL				R. STAHL GmbH Waldenburg Am Bahnhof 30 DE-74638 Waldenburg	Inside view				Construction plan	
				Processed:			Order num.:								Page	
							2830248-A								of	Page
Index	Modification	Date	Name				Order		Position: 000010						Scale 1:4	

Parts list

Row	Quantity	Part of	Name	Description	Additional texts	Manufacturer
1	1		A1	Enclosure 8040 size3 sideD w.holes f.M25		
2	1	A1		Cover 8040 size 3 opng foamed		
3	1	A1		Plate 8040 152x35mm toothed		R. STAHL
4	1	A1	1	8602A3-001-S Pushbutton Polyamide		R. STAHL
5	1	1		8602/3 Button label , Green , On I		R. STAHL
6	1	1		8082A0060-1-0 , Contact element For mounting rail mounting Contact material : Silver-nickel , 1 NC + 1 NO		R. STAHL
7	1	A1	2	8602A3-735-S-C01 Illuminated pushbutton , Spring return , Red Polyamide		R. STAHL
8	1	2		8010A0737-2-01 , 1 NC + 1 NO Illuminated pushbutton For mounting rail mounting Ex e , Polyamide		R. STAHL
9	1	A1	3	8602A3-010-S Mushroom stay-put button , EM-STOP Polyamide		R. STAHL
10	1	3		8082A0060-1-0 , Contact element For mounting rail mounting Contact material : Silver-nickel , 1 NC + 1 NO		R. STAHL
11	1			8161/7-M25-1707-LT Cable gland M25 7 ... 17 mm Unarmoured cable types , Polyamide , Black		R. STAHL
12	1			PE-terminal 8040		R. STAHL