


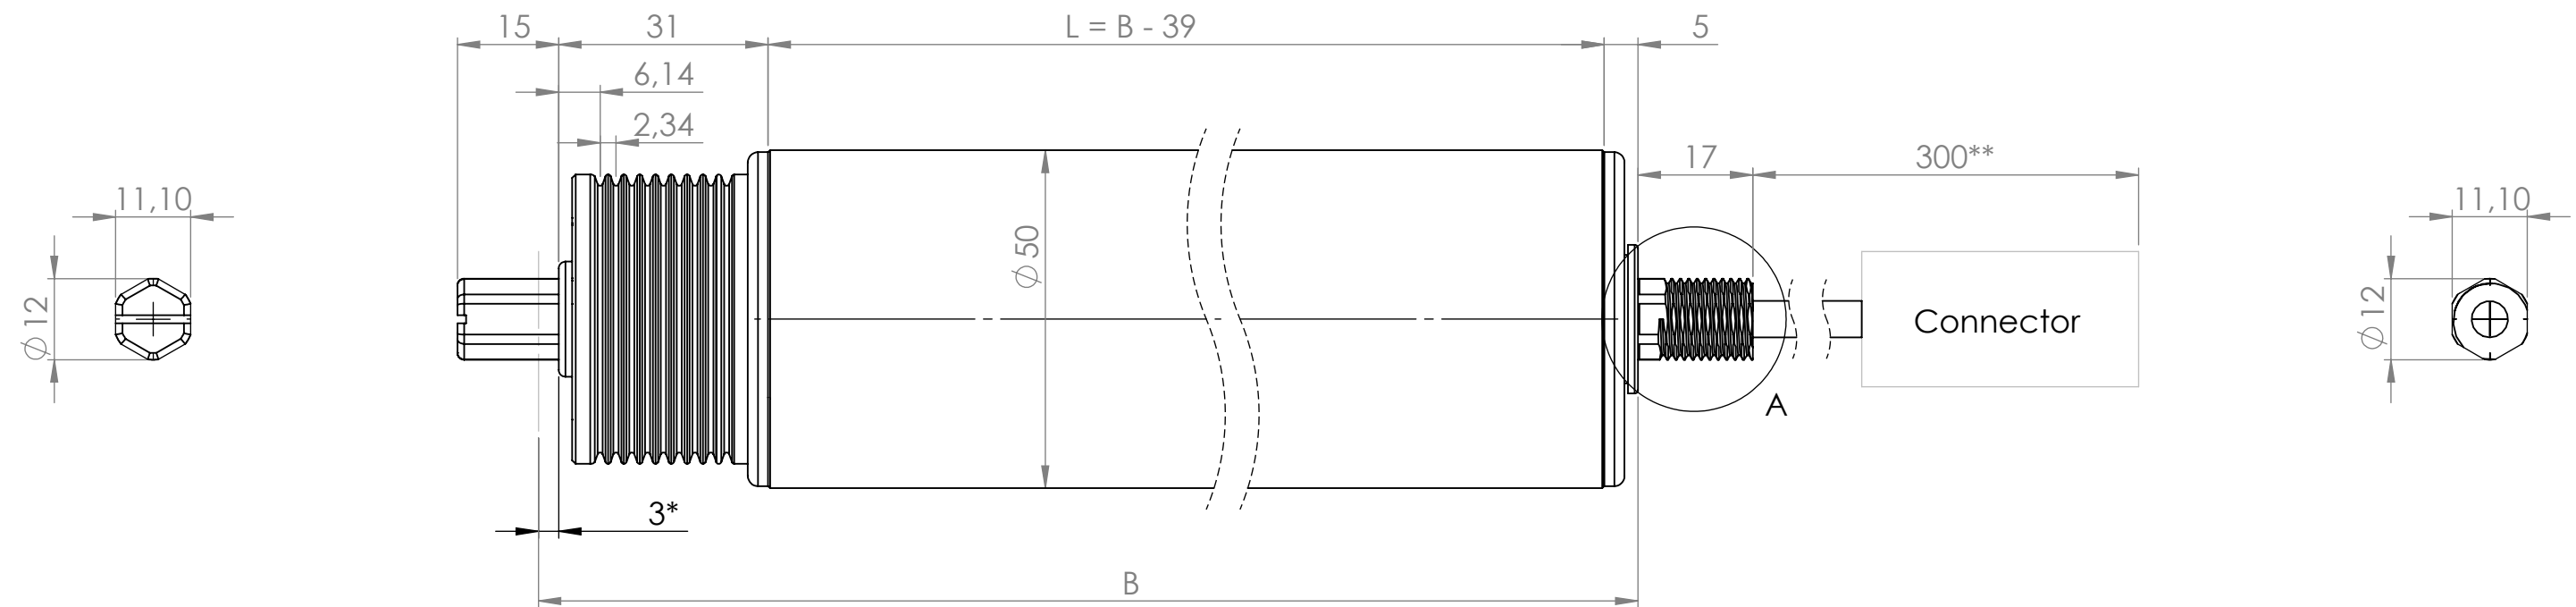

* Minimal Distance between roller and frame


** Cable length is 500 for XC and XK motor

B : entrefer châssis / Inside frame to frame

L : Longueur de tube / Tube length

Type of connector depend on type of MDR :

Connector	JST	M8-5P	SNAP-In
Motor application	FE / FE-B	VE / XE / XP	XK / XC
Shape			

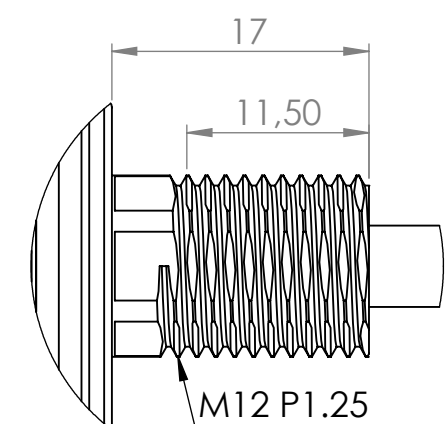

Grade A		CREATED	MODIFY	APPROVED
TEPLA067PF0002-A		On 31/07/18 by : C.J	On 00/00/00 by :	On 16/01/19 by : M.M
SCALE :1:1		Product	Format	
		PM500xxxxxxxxXV0S Cxxx (T;-)	A3	
		Itoh Denki Europe SAS		Folio 1 / 1