



Network Sensors: eZNS-T100

Description

The eZNS-T100 network sensor offers building occupants an intuitive touch-interface to adjust individual comfort levels while tailoring to the needs of their specific market. Featuring a standard temperature sensor with humidity, CO₂ and motion options, the eZNS also offers a choice of backlit colors to provide additional user feedback and esthetic appeal.

The eZNS sensor's NFC technology allows installers to use NFC-enabled mobile devices to configure the eZNS and enable enteliWEB integration.



Features

- ▶ RGB backlight allows choice of colors to indicate conditions, alarms and night mode
- ▶ Large easy-to-read LCD screen. Onscreen visual feedback on button selection.
- ▶ Capacitive touch zones allow custom button sizes
- ▶ Multiple button layout options. Simple one-touch buttons, or two-touch buttons for added functionality
- ▶ Slider to quickly adjust setpoint or tap for precise changes
- ▶ Fully programmable in GCL+
- ▶ USB Service port, software enabled or disabled. Service tool not required.
- ▶ Smartphone and tablet integration and setup using NFC technology
- ▶ Recessed mount for minimal profile or surface mount backplate options
- ▶ Fits most electrical boxes worldwide
- ▶ 2-piece design with tamper set screw lock

Application

The eZNS is suitable for a wide range of sensing applications, from basic temperature monitoring, to indoor air quality and occupancy sensing. A customizable interface allows for intuitive user interaction.

An available external input allows for additional zone monitoring such as window or door contact, temperature averaging or other dry contact sensor information.

When paired with an application controller, the eZNS supports advanced control strategies such as demand control ventilation, energy savings based on occupancy and optimal user comfort.

Specifications

Inputs

1 10kΩ input (16 bit A/D)

LCD (Optional)

2-line custom segmented display with icons

Buttons

2 rows of 4 capacitive touch zones, allowing up to 8 individual buttons or combined to form larger buttons

Backlight (Optional)

Optional RGB LED backlight for multicolor LCD and button illumination

Temperature

Digital Temperature Sensor
+/- 0.2° C (+/- 0.36°F)

Humidity Sensor (Optional)

Accuracy +/- 3%

CO₂ Sensor (Optional)

Dual Beam, Self Calibrating NDIR Detection

Range: 0-2000 ppm

Accuracy @ 77°F (25°C):
± (50ppm + 2% of value)

Temperature Dependence: 2ppm/°C
(1 ppm/ °F) typical

Pressure Dependence: 0.13% of reading per mm Hg

Stability: 20 ppm/year (typical)

Occupancy Sensor (Optional)

Passive infrared motion (PIR) sensor

Range: 5m (16.4 ft.)

Coverage: 100° Horizontal


Connectors

Screw-type terminal connectors


Wiring Class

Class 2 / SELV

eZNS-T100: Board Layout Diagram

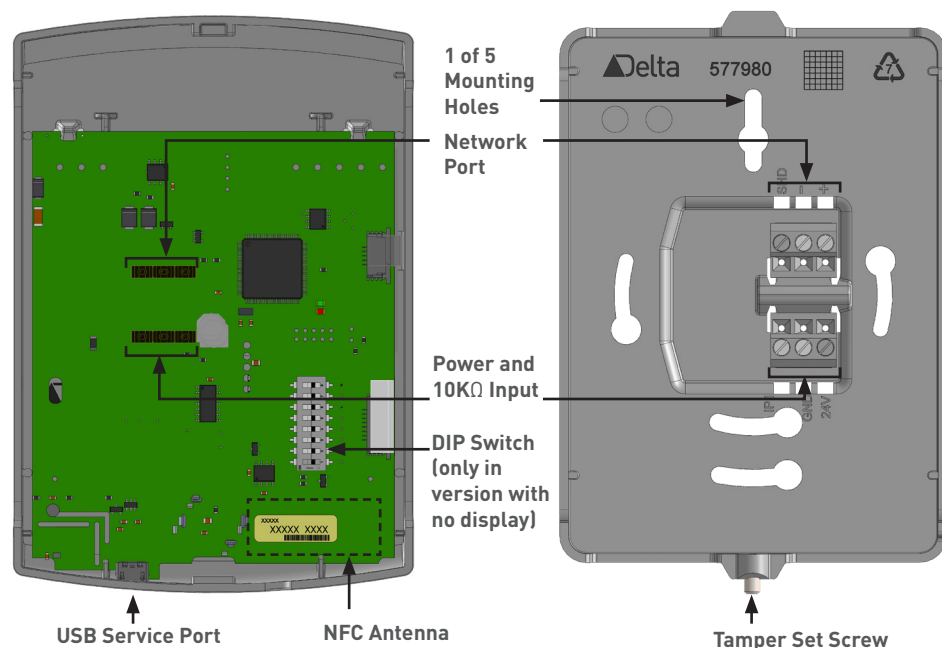

eZNS-T100: Dimensions and Backplate Options

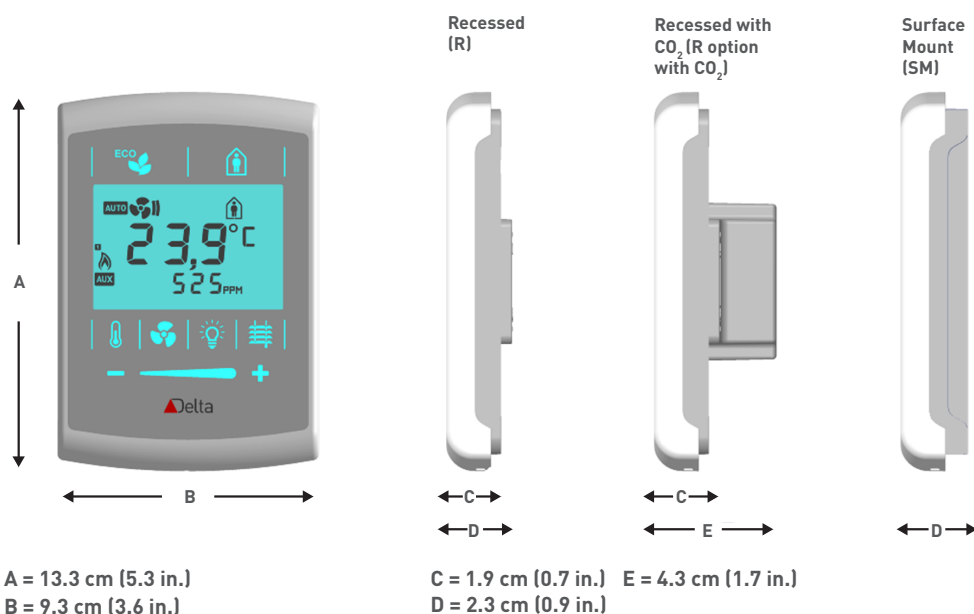

Specifications (Continued)

Power

24 V AC/DC
 2 VA no backlight
 4 VA with backlight
 6 VA with backlight and CO₂ sensor

Technology

32-bit processor
 Internal A/D, Flash and RAM

Communications

RS-485 port
 Delta LINKnet (up to 76800 bps)
 USB Service Port
 Used as virtual Com port to connect the BACnet® network to a workstation

Near Field Communication (NFC)
 Passive 2-way short range

Ambient

0° to 55°C (32° to 131°F)
 10 - 90% RH (non-condensing)

Dimensions

With R (non-CO₂) and SM backplate:
 13.3 x 9.3 x 2.3 cm (5.3 x 3.6 x 0.9 in.)

With R (CO₂) backplate:
 13.3 x 9.3 x 4.3 cm (5.3 x 3.6 x 1.7 in.)

Mounted Surface Profile

Recessed (both R backplates):
 1.9 cm (0.75 in.)

Surface Mount (SM backplate):
 2.3 cm (0.9 in.)

Weight

165 g (0.36 lb)

IP Rating

IP20

Compliance

CE
 FCC Class B

Listings


UL 916 Listed

enteliZ^{ONE} is a registered trademark of Delta Controls Inc.
 BACnet is a registered trademark of the American Society of Heating, Refrigerating and Air Conditioning Engineers Inc.

Updated in June 25 2018

Subject to change without notice.

eZNS-T100: Standard Button Overlay Options




Overlay 000



Overlay 003




Overlay 005



Overlay 009



Overlay 045



Overlay 046



Overlay 047



Overlay 053



Overlay 100

eZNS-T100: Color Options



WWG: White Button Overlay, White Front, Grey Back



GWG: Grey Button Overlay, White Front, Grey Back



BBB: Black Button Overlay, Black Front, Black Back



eZNS-T100C-B-R-045-WWG



eZNS-T100M-ND-R-000-WWG

Ordering

The product number of the eZNS-T100 is eZNS-T100aaa-bb-cc-ddd-eee where the letters correspond to the different options listed below:

Sensor Options (-aaa-)

C	CO ₂
H	Humidity
M	Motion
HM	Humidity and Motion
CH	CO ₂ and Humidity
CM	CO ₂ and Motion
CHM	CO ₂ , Humidity and Motion

Display Options (-bb-)

B	RGB Backlit Display / Buttons
NB	No Backlighting
ND	No Display

Backplate Options (-cc-)

R	Recessed / Recessed CO ₂ ¹
SM	Surface Mount

¹CO₂ sensor options require recessed CO₂ backplate.

Button Overlay Options (-ddd-)

046

###	Standard Button Overlay Number
###	Library Button Overlay Number ²
000	Blank Overlay (No Display)
999	Custom Button Overlay ³

²See eZNS Button Overlay Design Guide. Expect up to 8 weeks for delivery. Additional charges apply.

Button Overlay and Plastic Color Options (-eee-)

WWG	White Button Overlay, White Front with Grey Backplate (default)
GWG	Grey Button Overlay, White Front with Grey Backplate
BBB	Black Button Overlay, Black Front with Black Backplate
Custom	Custom Color Options ³

³Contact inside sales for pricing and more information.