
ALL DIMENSIONS ARE IN mm | DO NOT SCALE THE DRAWING | IF IN DOUBT,PLEASE ASK

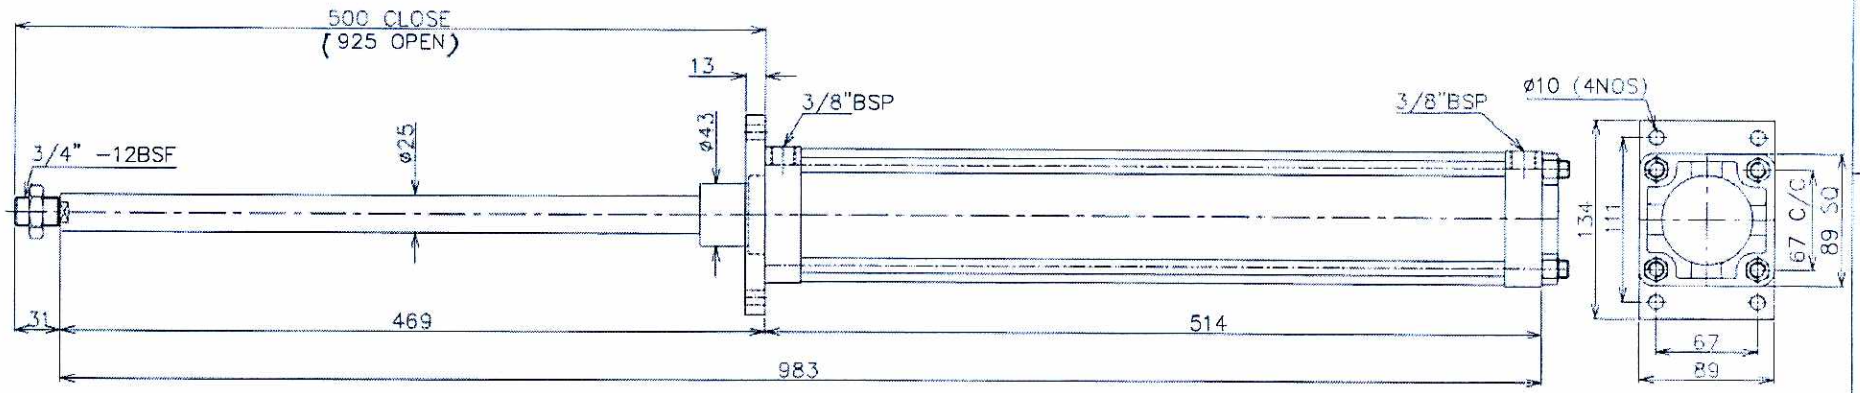

APPROVED 20/12/18.

PO NO:- M1591/203/204; DT-07/12/2018	
MAX WORKING PRESSURE 10 kg/cm2	
THRUST CHART @ 6 BAR	
PUSH	PULL
273.6 KGF	243.6 KGF

NOTE FOR MANUFACTURING:- TOTAL PISTON ROD EXTENSION 408mm.

SPECIFICATIONS:		MATERIALS SPECIFICATION:	
TYPE	DOUBLE ACTING, BOTH END CUSHIONED	BARREL	ALUMINUM HARD ANODIZED
BORE	3"	PISTON ROD	SS 304
STROKE	425 mm	PISTON	ALUMINUM
MOUNTING	FRONT PLATE	COVERS	ALUMINUM
PISTON ROD DIA	25mm	SEALS	NBR
CUSTOMER	M/S :- SHARPLEX FILTERS (INDIA) PVT LTD.		
CUSTOMER PROJECT/DWG NO :- SH-PNEUMATIC CYLINDER-203\1			

THIS DESIGN & ANY INFORMATION CONTAINED IS THE PROPERTY OF SCHRADER DUNCAN LIMITED & MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION.

SR	REVISION	DATE	SIGN

DUNCAN DUNCAN ENGINEERING LTD
F-33,RANJANGAON MIDC,KAREGAON, TAL-SHIRUR, PUNE-412 209

TITLE: Ø3" x 425mm STROKE OF PNEUMATIC CYLINDER

MATL.:	DRAWN	JSD	18/12/18	
DWG FILE:CYL	CHKD	NMK	18/12/18	
CUSTOMER: **	APPRD	AMK	18/12/18	
SCALE :	FG CODE:- SSCC9844			
	DRG NO.: C-9844			REV.: 0