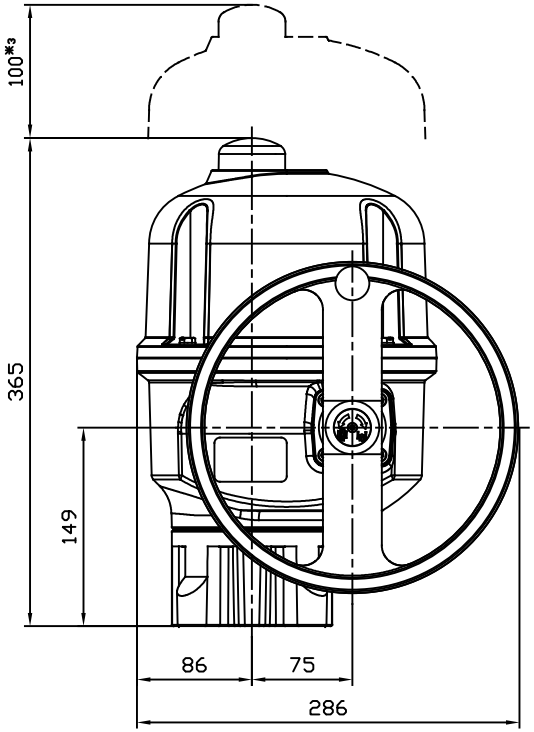

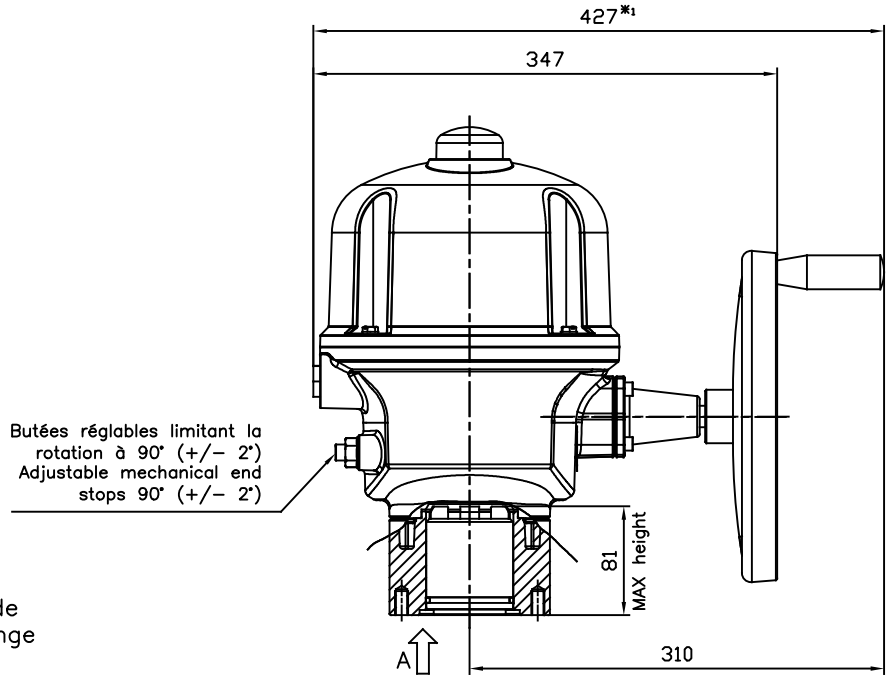

ISO 5211
F10
Vue A de la bride
View A of the flange



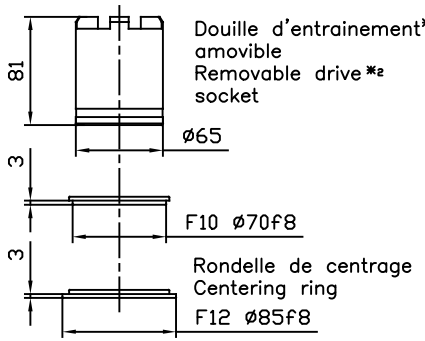

ISO 5211
F12
Vue A de la bride
View A of the flange



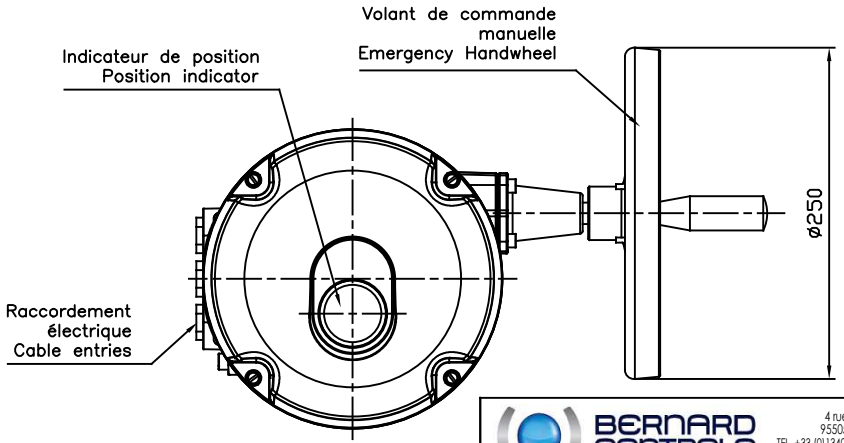

BERNARD CONTROLS
4 rue d'Arsonval BP 91
95505 GONESSE CEDEX
TEL. +33 (0)134077100 FAX. +33 (0)134077101
www.bernardcontrols.com

Ce plan étant notre propriété, il ne peut être reproduit ou communiqué sans notre autorisation écrite.
This drawing is our property and may not be reproduced or communicated without our written authorization.

NOTA: Plan non contractuel/No contractual Draft
*1 - L'actionneur est représenté dans sa taille maximale. The actuator is represented in its maximale size.
*2 - Représentation de la douille en position fermée. Representation of the socket in closed position.
*3 - Côte de démontage/Dimension to allow for dissassembly

Masse/Weight:	Unités/Units:
18 kg	mm

Vitesse/Speed:	Forme/Form:	Bride/Flange:
ALL rpm	SOCKET	F10F12

Dessiné par: Designed by:	Vérifié par: Verified by:	Approuvé par: Approved by:
G.Liu 26/01/21	K.Xin	F.Han 26/01/21

Fr/En

Encombrement / External Dimensions

AQ80 | AQ100

Etanche/Weatherproof
None
Switch
Switch

Echelle/Scale:	Planche/Sheet:		Modification:	Ind./Rev.:
1/4 -	1/1	CD_02075_FR_EN		F

A3