SF8 Series

SF810B/P__ SF810B/S__

Male contact

Cable outer diameter range
I: 3-4mm, II:4-5mm
Number of contact
Female contact

Cable connector
Mate with SF811B, SF812B,
SF815B



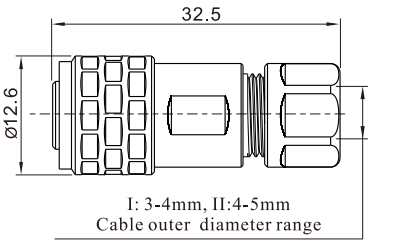

SF811B/P__ SF811B/S__

In-line cable connector
Mate with SF810B

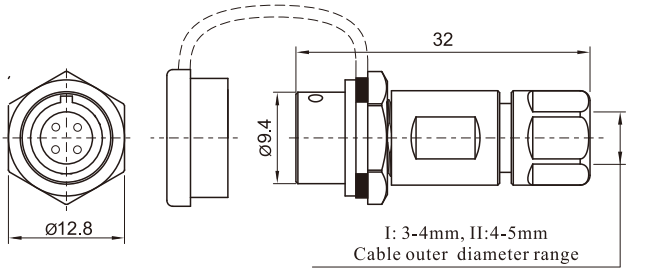

SF812B/P_ SF812B/S_

Rear-nut mount
Mate with SF810B

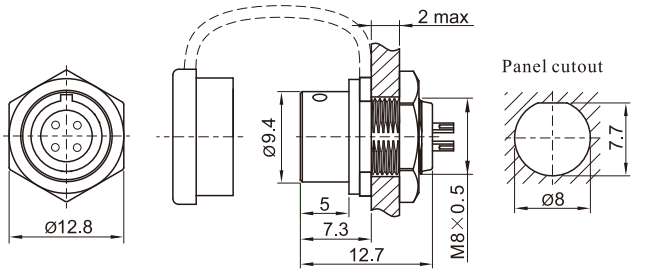

SF815B/P_ SF815B/S_

Front-nut mount
Mate with SF810B

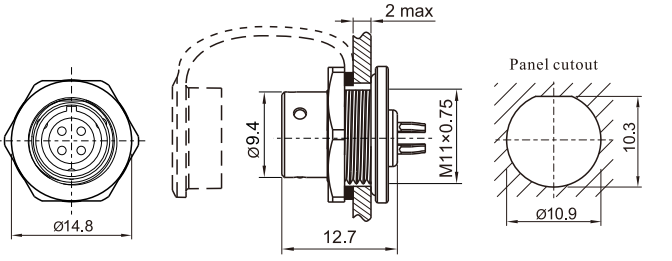

Solder contact spec

Number of contact	2	3	4	6	8
Male contact face view					
Rated current (A)	5	5	3	3	3
Contact diameter(mm)	ø1×2	ø1×3	ø0.6×4	ø0.6×6	ø0.6×8
Rated voltage (AC.V)	125	125	30	30	30
Test voltage(AC.V) 1 min	1000	1000	500	500	500
Contact resistance (mΩ)	5	5	10	10	10
Wire size (mm²/AWG)	≤0.75/18	≤0.75/18	≤0.5/20	≤0.5/20	≤0.5/20