


FIRE PUMP TEST METER K-2500-8

CONSTRUCTION & SPECIFICATIONS

Material	316 Stainless Steel
Fittings:	316 Stainless Steel Connectors 316 SS Ball Valves
Hoses:	Teflon hose with 316 Stainless Steel over braid. 316 Stainless Steel Ball Valves 316 Stainless Steel Connectors

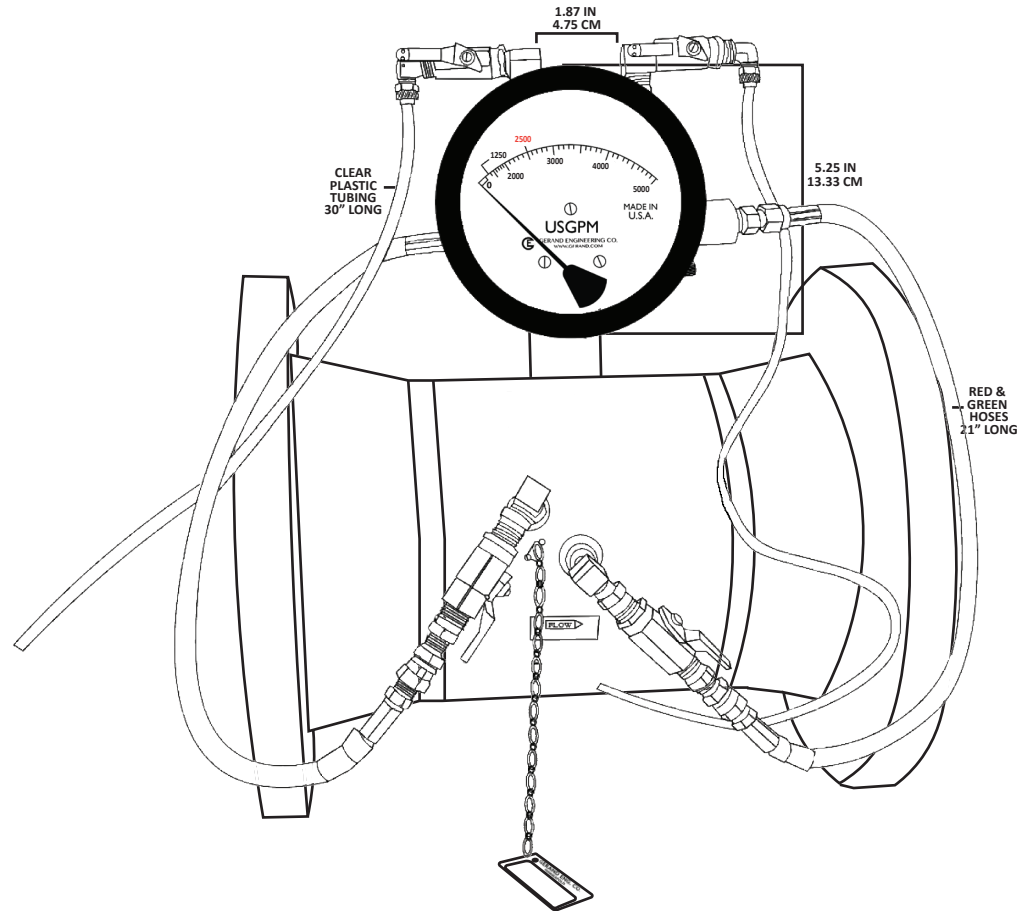

METER DATA

CONSTRUCTION:	316 STAINLESS
OPERATION:	BUNA "N" DIAPHRAGM
ACCURACY:	±2.0%
TEMPERATURE:	200° F MAX
PRESSURE:	1500 PSI MAX
APPROX.WEIGHT:	3 LBS/EACH

4 1/2" DIAL STANDARD - 6" AVAILABLE

WELD-NECK FLANGES
RAISED FACE

