

PC3AZA0-030-320

Extension cable; M8 Male 3 poles + DIN 'A' double earth H6/H12 shape with 24V Led + VDR_300mm



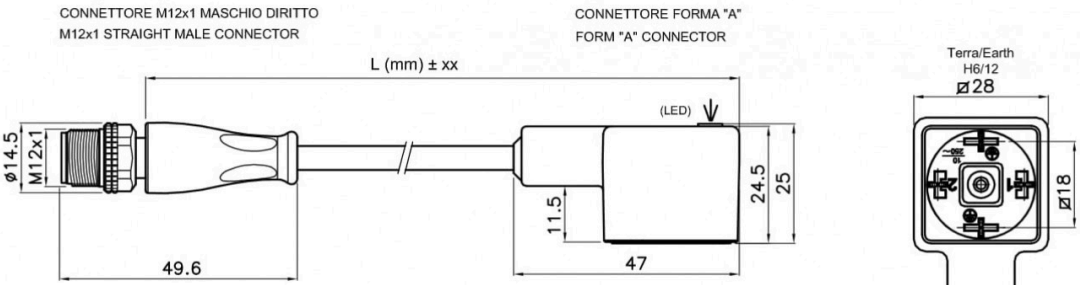

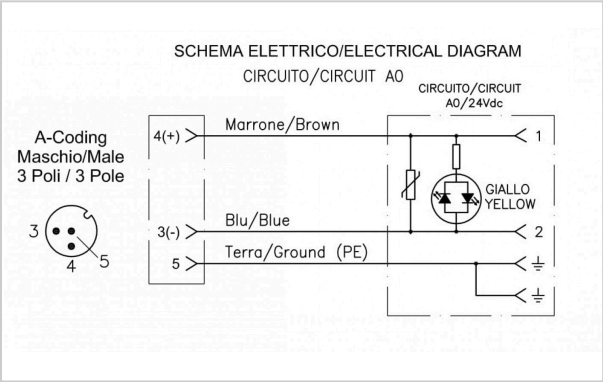

Length	300mm
Code	45303-004
EAN code	
Customrate	85444290

Series: Extension cord double head M12+DIN

Code/Initials	PC
Reference norm	IEC 61076-2-101
Protection degree	IP67, IP68
Pollution degree	3
Operating temperature	-25°C … +80°C
No unscrewing ring-nut	Nickel-plated Brass
Contacts material	Gold-plated Brass
External insulation	Plastic (TPU) PUR
Contacts holder	Plastic PA
Gasket	NBR (FKM on request)
Insulation resistance	≥ 10^8 Ω
Resistance	≤ 5mΩ
Mechanical operations	1000 Cycles max

Poles: 3 poles - M12x1 series with Leds

Number of poles	3
Max rating voltage	30V
Max rating current	4A
Status signal	Y/G
Circuit	segnalazione

Cables: PUR 3xAWG22 (0,34 mm²) 80°C 300V UL Style

Code/Initials	0193037NE-16 / 320
Sheat material	PUR
Sheat diameter	4,40 mm ± 0,20
Sheat color	BK, RAL 9005
Conductors section	3AWG22 (0,34 mm²)
Insulation material of conductors	PP
Structure of conductors	42 x 0,10 mm
Conductors color	brown, blue, black
Cable rating voltage	≤ 300 V
Alogen free	si
Radius of static installation	5 x diam. cavo
Radius of free installation	10 x diam. cavo
Work temperature	-40°C ... +80°C
Work temperature	-25°C ... +80°C
Max number of operations	2 milioni
Translation speed in energy chains	200 m/min
Acceleration in cable drag chains	7 m/s²

Min-Tec Industriale S.r.l ©
Telefono: +39 031 760911 - E-Mail: info@mintec.it
C.F/P.I 11737780152