


Insulated Ferrules TS

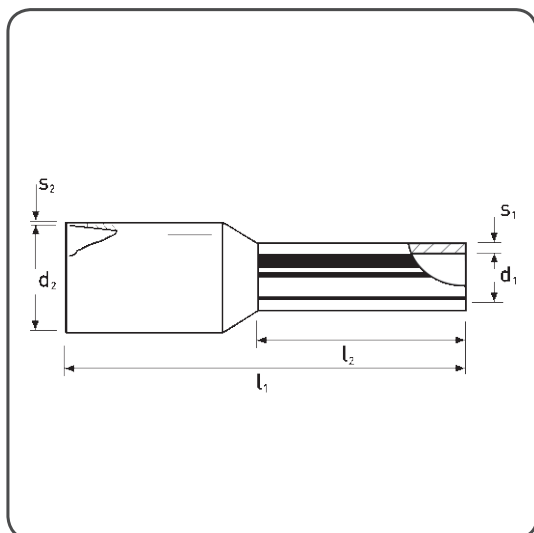

The product images are for illustrative purposes only and do not represent the exact product selected.

Substance: E-CU
Surface: tin-plated, min. 3 μm
Insertion funnel: Polypropylen
Heat resistance: max 105°C
DIN: according to DIN 46228 part 4
Customs tariff code: 85369010

Cross-section mm ²	AWG	Type	l1 mm	l2 mm	d1 mm	d2 mm	s1 mm	s2 mm	Color DIN	Part no.	PU pcs.
1,00	18	TS 1,00/N	14,0	8,0	1,4	3,0	0,15	0,25	red	11-121	500