




MVE 26000/090H-110A0 (EH826000B0A0VA0000)

3 PH - 8 poles - 900 RPM - 460 V (Delta) - 60 Hz

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power factor	Ia/In
5.857	2.928,5	26.489	460 [Delta]	16,5	Δ 28	0,74	5,2

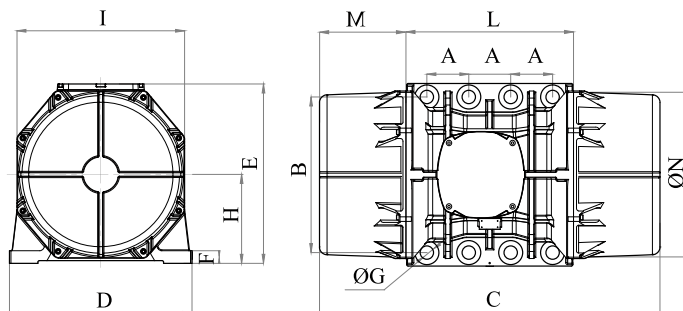

*Technical drawings are illustrative purposes only, please refer to 2D/3D drawings available on "FINDER" app.
Contact us for more information.

OVERALL DIMENSIONS [mm]													
Weight [Kg]	A	B	G	Holes number	C	D	E	F	H	I	L	M	N
982	140	520	45	8	1.130	610	594	42	297	560	560	285	530

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Nm]	Cable type	Cable gland
Please refer to the label on the motorvibrator	Yes	M42	43 x 78 mm	2850	4G6 125°C	M32 125°C

BEARINGS LIFE HOURS				
Bearing model	Type	100% C.F	80% C.F	50% C.F
NJ 2328		12766	26859	>100000

CERTIFICATION	
ATEX II2 D Ex tb IIIC Tx Db IP66 IECEx Ex tb IIIC Tx Db IP66 [Tx Size 10-30:115°C - Tx Size 40-91:150°C - Tx Size 100-110:125°C] T.Amb -20/+55°C	

REV1-22/05/2019

Dimension with coarse degree of accuracy related to UNI 22768/1 Rights reserved to modify technical specifications.

