


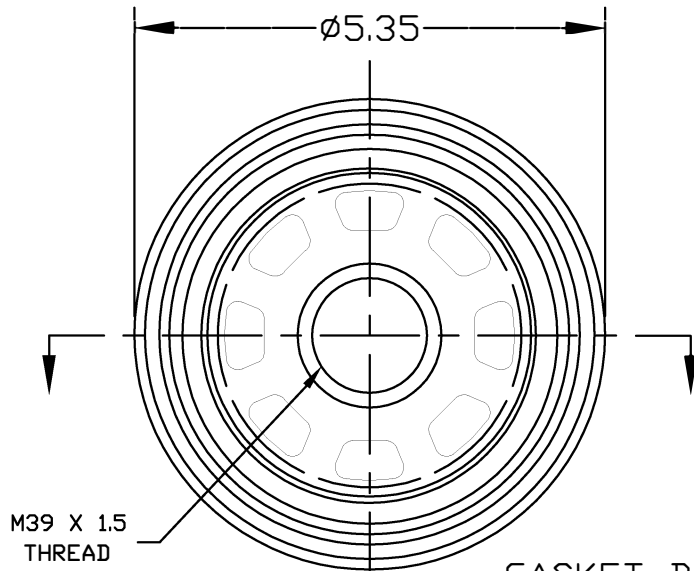


SPECIFICATIONS:

SEAL MATERIAL: FLUORO RUBBER
 COLLAPSE STRENGTH: 290 PSI
 RATED AIR FLOW: 190 CFM
 WORKING PRESSURE: 100 PSI
 INITIAL PRESSURE DROP: ≤ 2.9 PSI
 WORKING TEMPERATURE: $\leq 248^{\circ}\text{F}$
 OIL CARRY OVER: $\leq 3\text{PPM}$

GASKET DIMENSIONS:

4.38" OD X 3.94" ID X 0.20" THK
 GASKET MATERIAL: BUNA NBR, 50% NITRILE

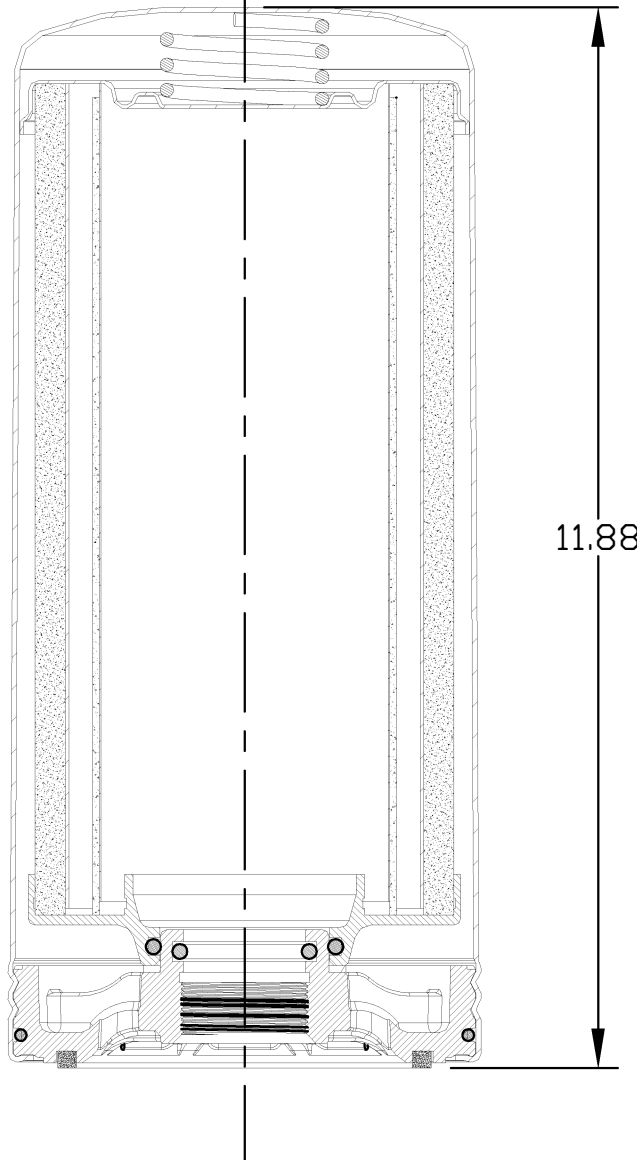

NOTE: DRAWING NOT TO SCALE

KELTEC Technolab 2300 East Enterprise Parkway Twinsburg, Ohio 44087		Rev.
		Part No. KD900-018
THIS DOCUMENT AND ITS CONTENT ARE THE PROPERTY OF KELTEC TECHNOLOG. THE USE OF THIS DOCUMENT AND ITS CONTENTS WITHOUT WRITTEN PERMISSION OF KELTEC TECHNOLOG IS PROHIBITED		
DEM:	DEM No. LB13145/3	
WEIGHT LBS.	7.98	
DRAWN BY:	C. SMITH	
DATE:	10/18/2018	
Part No. KD900-018		