


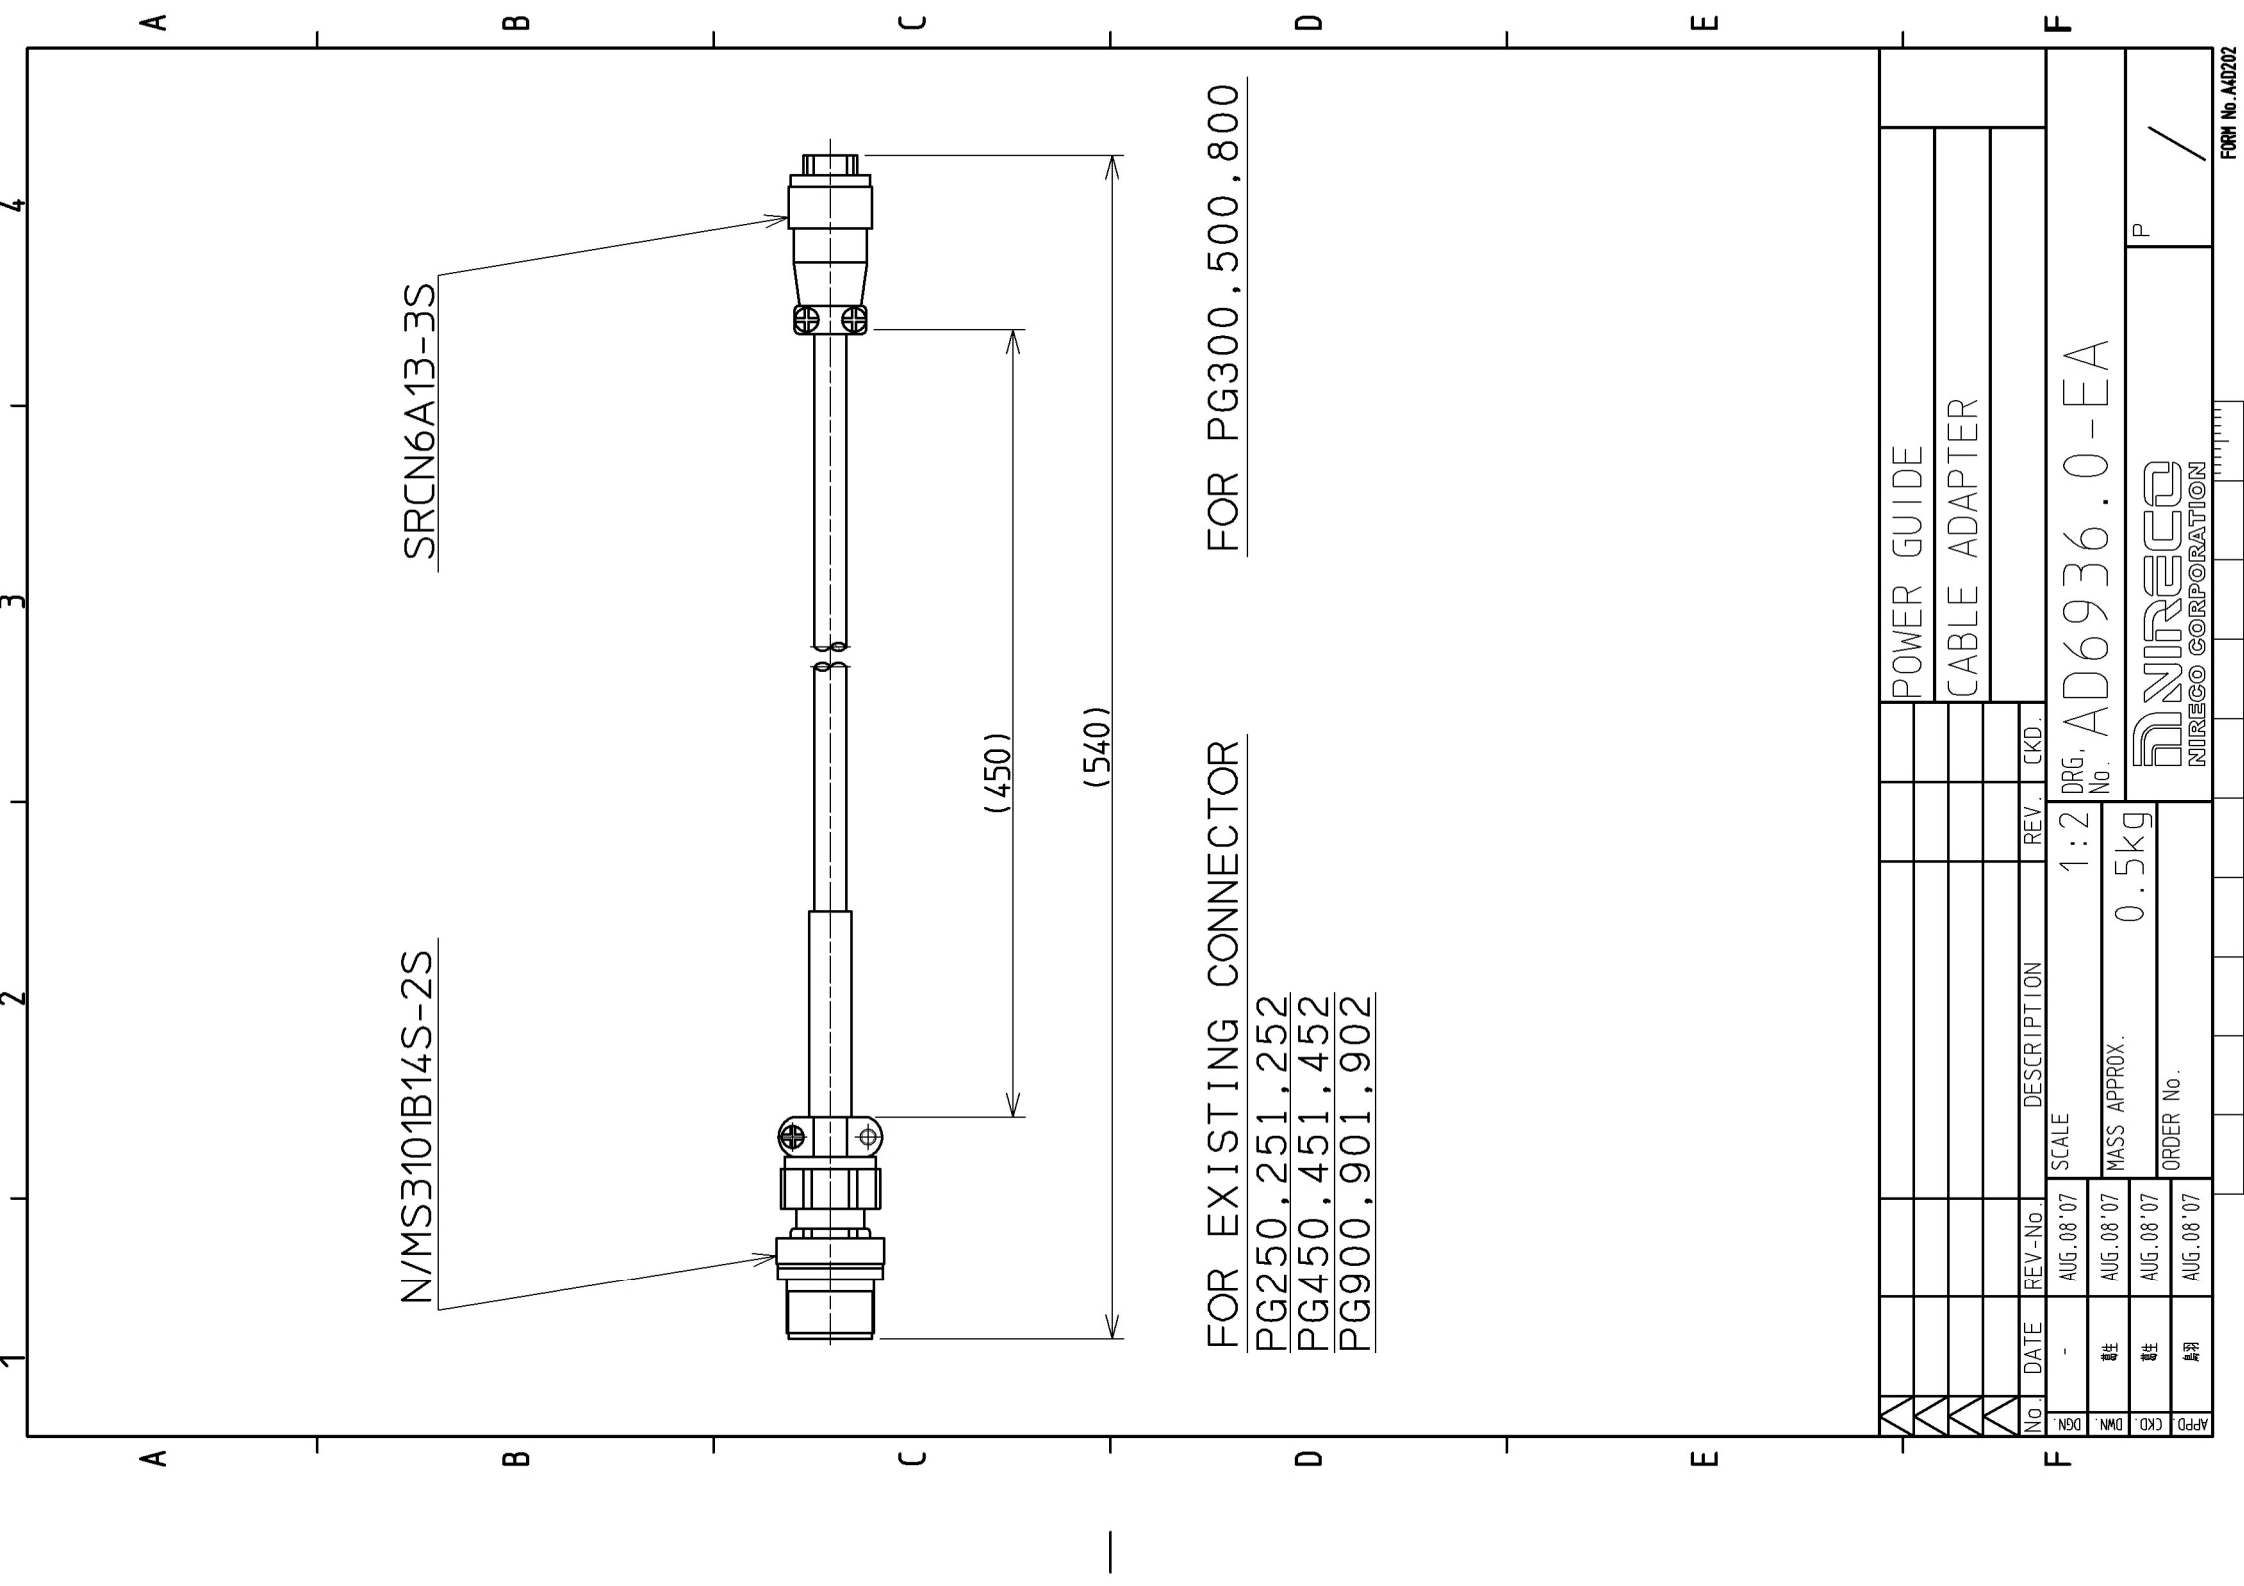

FOR EXISTING CONNECTOR



FOR PG300,500,800

PG250,251,252

PG450,451,452

PG900,901,902

										POWER GUIDE			
										CABLE ADAPTER			

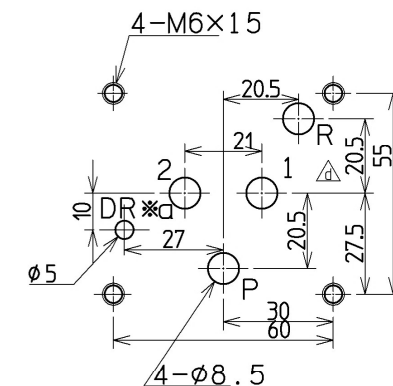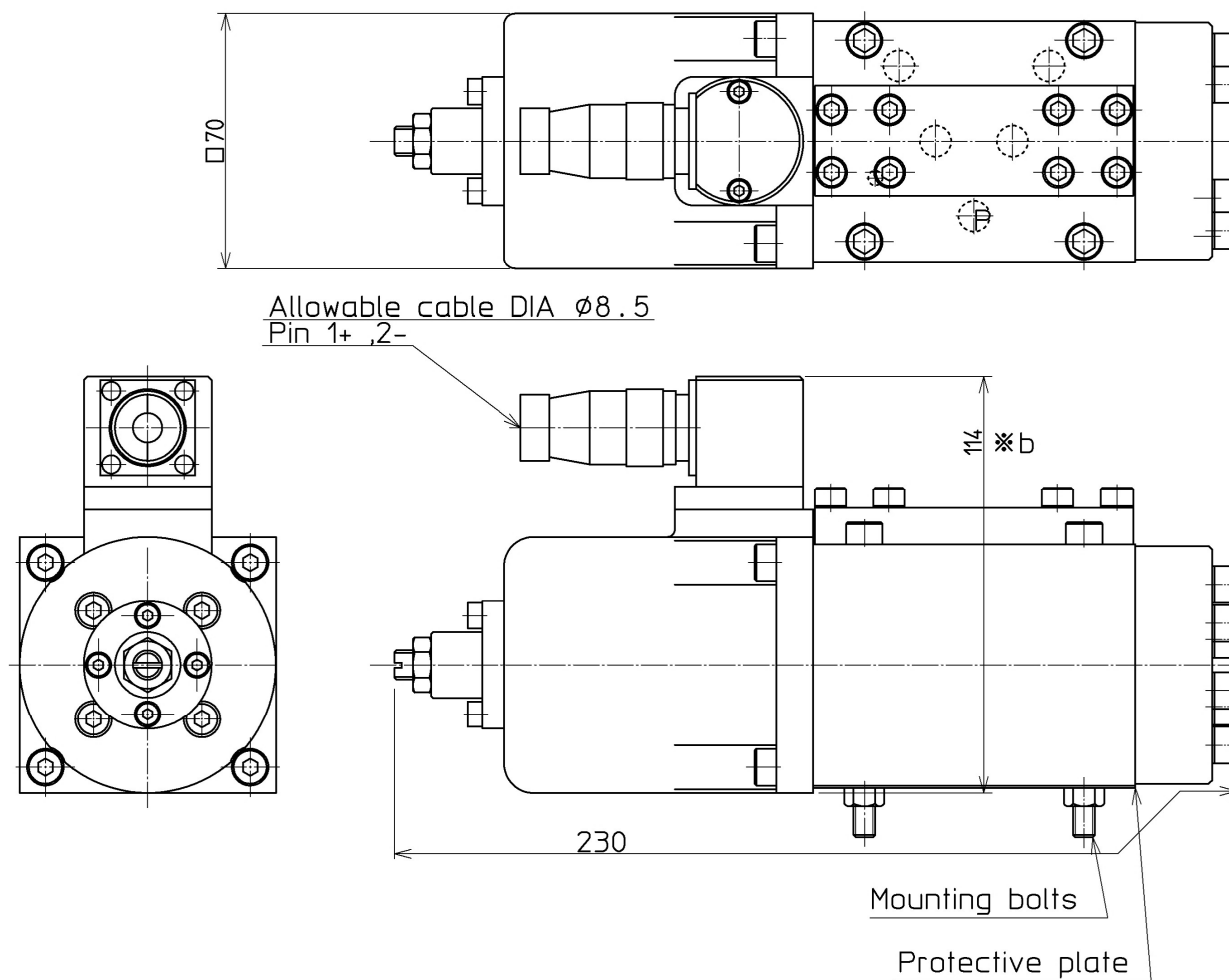

Mounting holes dimension

NOTE

- 1.*a Disuse the "DR" hole ø5 in case the internal drain type.
- 2.Accessories
Blts : 4P' cs
Nuts : 4P' cs
△ O-rings JIS B 2401 1B P10 : 6P'cs
- 3.Use the filter
△ 10μm (β₁₀ ≥ 200)
on the hydraulic supply piping line.
- 4.*b "122" in case water-glycol type hydraulic fluid.
- 5.*c "10~50℃" in case water-glycol type hydraulic fluid.

	PG300	PG500	PG800
Rated pressur		2~14MPa	
Rated current		±200mA	
Rated flow	25L/min	50L/min	80L/min
HYDRAULIC OIL TEMPERATURE		10~60℃ *c	
VISCOSITY		20~80mm/S(cSt)	

APR. 18 '16	A18593	ADD.	H. Ando	N. Iino	POWERGUIDE
JUN. 23 '14	A13971	REV.	A. Takura	Y. Inai	PG300 PG500 PG800
SEP. 03 '12	A09405	REV.	S. Koyama	Y. Inai	PG□□□□
No.	DATE	REV.-No.	DESCRIPTION	REV.	CKD.
	-	SEP. 02 '08	SCALE	△ 1:1.5	DRG. No. AD6930.0-EA
DES.	N. KUZUU	SEP. 02 '08	MASS APPROX.	4.6Kg	
ENG.	Y. KATOU	SEP. 02 '08	ORDER No.		
APP.	Y. KATOU	SEP. 02 '08			

NIRECO
NIRECO CORPORATION

