

DN 100 - MXS23...-2 POLE




Enclosed single channel impeller

80 mm Ø Spherical clearance

2900 rpm



HYDRAULIC PERFORMANCE

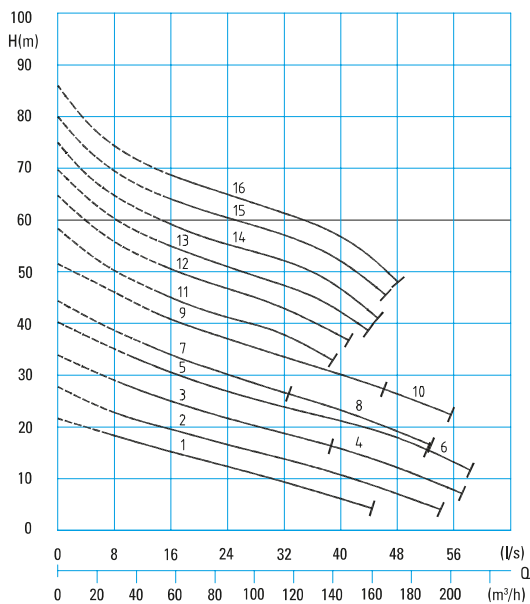


Technical data

WET WELL INSTALLATION

Curve No.	Pump type	Motor P ₁ (kW)	Motor P ₂ (kW)	Rated current (A)	Weight normal (kg)	Weight Ex (kg)
①	MXS2328-T72 (Ex)	11,0	9,5	18,8	120	120
②	MXS2330-T82 (Ex)	13,0	11,5	22,2	123	123
③	MXS2332-T82 (Ex)	13,0	11,5	22,2	123	123
④	MXS2332-P92 (Ex)	16,0	14,4	27,0	178	190
⑤	MXS2334-P92 (Ex)	16,0	14,4	27,0	178	190
⑥	MXS2334-P102 (Ex)	22,0	19,6	36,9	178	190
⑦	MXS2336-P92 (Ex)	16,0	14,4	27,0	180	192
⑧	MXS2336-P102 (Ex)	22,0	19,6	36,9	180	192
⑨	MXS2338-P102 (Ex)	22,0	19,6	36,9	180	192
⑩	MXS2338-P122 (Ex)	28,0	25,4	46,3	198	210
⑪	MXS2340-F152	38,0	35,0	59,4	383	383
⑫	MXS2341-F152	38,0	35,0	59,4	383	383
⑬	MXS2342-F152	38,0	35,0	59,4	383	383
⑭	MXS2344-F152	38,0	35,0	59,4	383	383
⑮	MXS2345-F162	43,0	40,0	67,5	390	390
⑯	MXS2346-F162	43,0	40,0	67,5	390	390

MOTOR OUTPUT

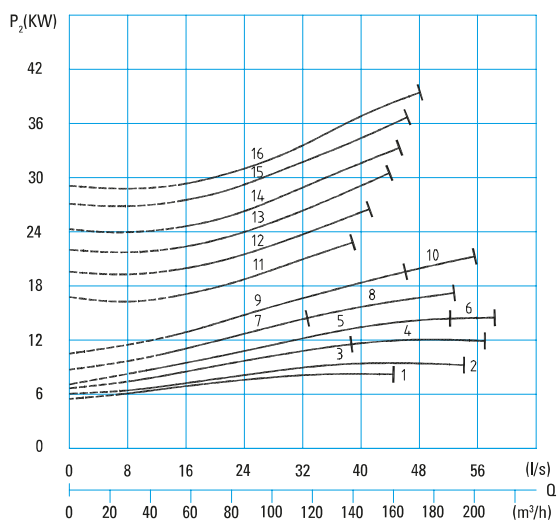

Technical data

DRY WELL INSTALLATION

Curve No.	Pump type	Motor P ₁ (kW)	Motor P ₂ (kW)	Rated current (A)	Weight normal (kg)	Weight Ex (kg)
①	MXS2328-ET72 (Ex)	10,5	9,5	20,1	146	146
②	MXS2330-ET82 (Ex)	12,7	11,5	22,7	146	146
③	MXS2332-ET82 (Ex)	12,7	11,5	22,7	146	146
④	MXS2332-PU92 (Ex)	16,0	14,4	27,0	189	201
⑤	MXS2334-PU92 (Ex)	16,0	14,4	27,0	189	201
⑥	MXS2334-PU102 (Ex)	22,0	19,6	36,9	189	201
⑦	MXS2336-PU92 (Ex)	16,0	14,4	27,0	191	203
⑧	MXS2336-PU102 (Ex)	22,0	19,6	36,9	191	203
⑨	MXS2338-PU102 (Ex)	22,0	19,6	36,9	191	203
⑩	MXS2338-PU122 (Ex)	28,0	25,4	46,3	211	223
⑪	MXS2340-FU152	38,0	35,0	59,4	409	409
⑫	MXS2341-FU152	38,0	35,0	59,4	409	409
⑬	MXS2342-FU152	38,0	35,0	59,4	409	409
⑭	MXS2344-FU152	38,0	35,0	59,4	409	409
⑮	MXS2345-FU162	43,0	40,0	67,5	416	416
⑯	MXS2346-FU162	43,0	40,0	67,5	416	416