

Delta VFD25AMS43ANSAA MS300 Series Drive

PRODUCT SPECIFICATIONS

Model Name	VFD25AMS43ANSAA
Series	MS-300 Series
Input Voltage – Phase	460 V – 3 Phase
Motor Power Range	15 HP – 11 KW
Frequency	0 – 599 Hz
Frame Size	E1
IP Level	IP 20
EMC Filter	Optional
Normal Duty* Amps	28 A
Heavy Duty** Amps :	25 A
Weight	8.75 Lbs
Dimensions	5.12 (in) x 9.84 (in) x 7.83 (in)





* Normal duty: rated current 120% for 60 seconds; 150% for 3 seconds

** Heavy duty: rated current 150% for 60 seconds; 200% for 3 seconds

DRAWING_1

MS300 FRAME E
Send Quote Requests to info@automatedpt.com

Call +1(800)985-6929 To Order or Order Online At Deltaacdrives.com

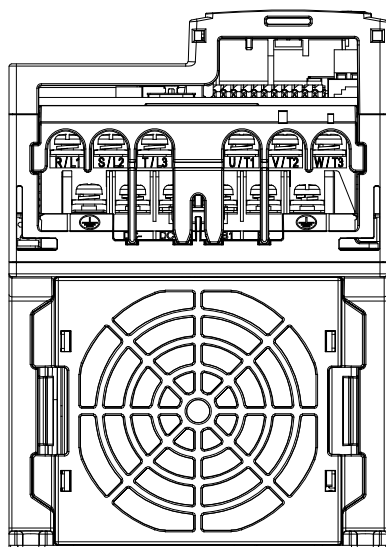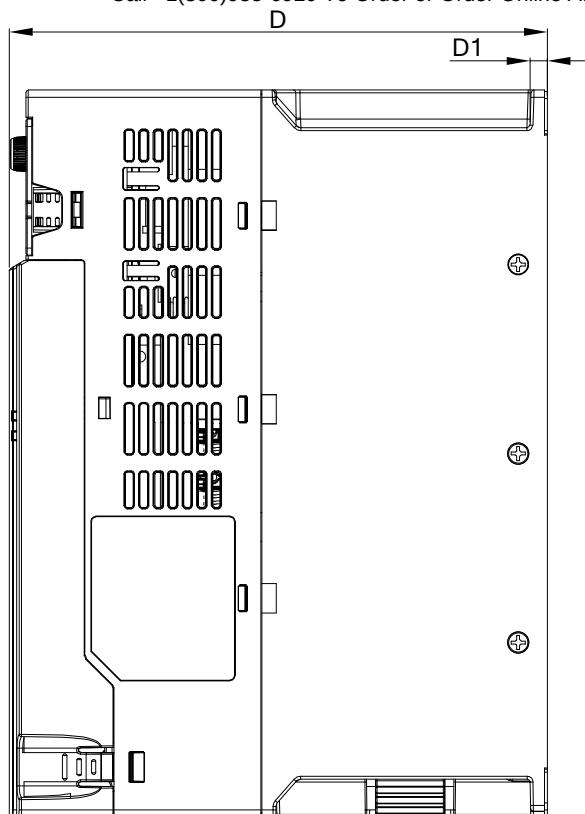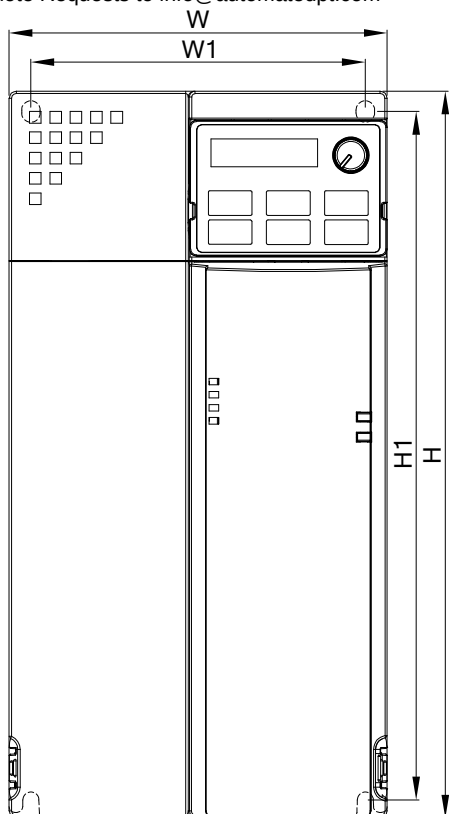

Mounting Hole

DIMENSION :

UNIT : mm[inch]

FRAME	W	W1	H	H1	D	D1	S1
E1	130.0[5.12]	115.0[4.53]	250.0[9.84]	236.8[9.32]	185.0[7.83]	6.0[0.24]	5.5[0.22]
E2	130.0[5.12]	115.0[4.53]	250.0[9.84]	236.8[9.32]	219.0[8.62]	6.0[0.24]	5.5[0.22]



DELTA

台達電子工業股份有限公司

DELTA ELECTRONICS, INC.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

DOCUMENT NAME

Send Quote Requests to info@automatedpt.com
Call +1(800)985-6929 To Order or Order Online At Deltaacdrives.com

VFD-MS300-E-PD

STANDARD

1.MODEL:

FRAME_E1:

VFD33AMS23ANSAA
VFD33AMS23ENSAA
VFD49AMS23ANSAA
VFD49AMS23ENSAA
VFD25AMS43ANSAA
VFD25AMS43ENSAA
VFD32AMS43ANSAA
VFD32AMS43ENSAA
VFD33AMS23ANSHA
VFD33AMS23ENSHA
VFD49AMS23ANSHA
VFD49AMS23ENSHA
VFD25AMS43ANSHA
VFD25AMS43ENSHA
VFD32AMS43ANSHA
VFD32AMS43ENSHA

FRAME_E2:

VFD25AMS43AFSHA
VFD32AMS43AFSHA

07	Add. Models: ANSAJ	2019/06/12
06	Add. Drawing_2a For GS20 Series	2019/04/10
00	FIRST ISSUE	2014/12/04
REV.	DESCRIPTION	DATE
DRAWN	Pranali Tsai	HONGDA.LU