
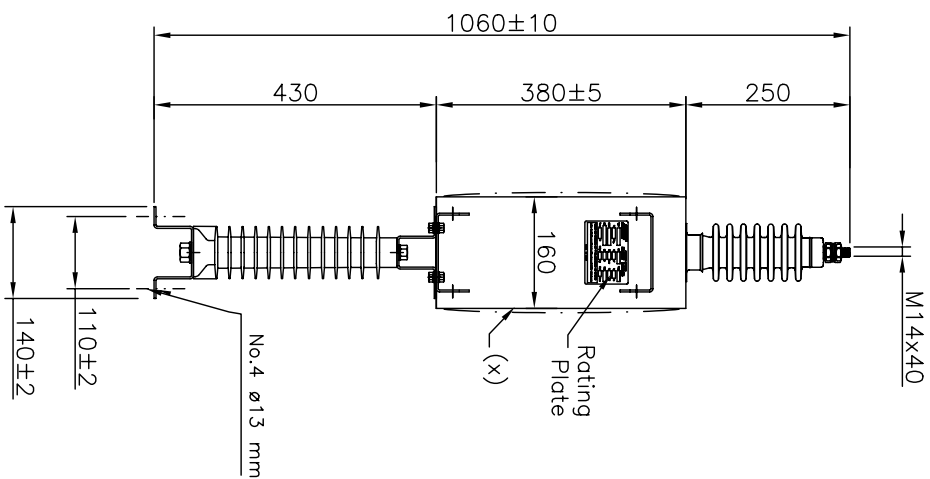


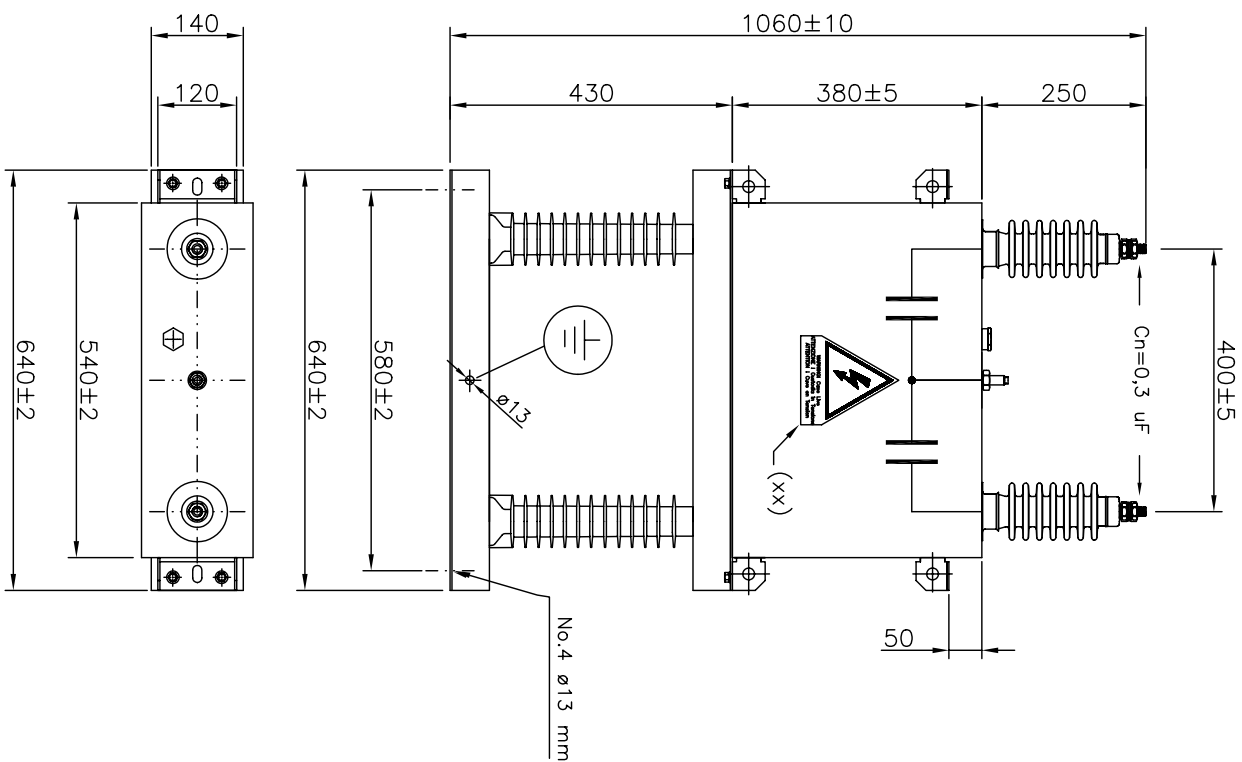

(xx): Warning Label : Live Case!

TECHNICAL DATA

STANDARD: VDE 0560-3

Um : 36 kV r.m.s.

U_{rw} : 70 kV r.m.s.

Urb : 170 kV peak

C: 0.3 μ F

fn : 50/60 Hz

TEMPERATURE CATEGORY : -25/+45°C

TESTING : 2x35 kV= 70 kV r.m.s./1 min

DIELECTRIC: ALL POLYPROPYLENE FILM

BUSHINGS : CERAMIC

POST INSULATOR : RESIN

RACK : NO-MAGNETIC STAINLESS STEEL

CAPACITORS CASE : NO-MAGNETIC STAINLESS STEEL

WEIGHT: ~ 70 kg

INSTALLATION: INDOOR

RATING PLATE (96x66 mm)



RIFASAMENTO INDUSTRIALE
Viedana (UN) - ITALY
Email: info@enerlux.it
Tel. +39 0275 765697
Fax. +39 0275 765877

Type	OVP.36.0-0.3	SN	xxxxxxQ	Year	2011
U _N	36 kV _{rms}	C _N	0.3 uF	f _N	50/60 Hz
	without	Q _N	/ kVar	U _i	70/170 kV
Std	IEC 60336-VDE 0560-3	DR	/ MΩ	Con.	/
Temp	-25/B °C	Weight	70 kg	Fluid	liters

WARNING! NO INTERNAL DISCHARGE RESISTOR!

WARNING! After disconnecting with 10 min. Discharge Earth and Short-circuit before Handling! Once measuring the type IEC 61335-1 & IEC 61335-2 & IEC 61335-3 CAUTION! Corrosion, Impregnation JAR/IEC, C1010 type Consumable, no PCB biodegradable fluid electric, non-toxic, environmental compatible

MADE IN ITALY