


SPECIFICATIONS



Model Number: CLE2L2X-XE1
Part Number: 19039317A

Version: 01
April 9, 2025

Mechanical Drawing:

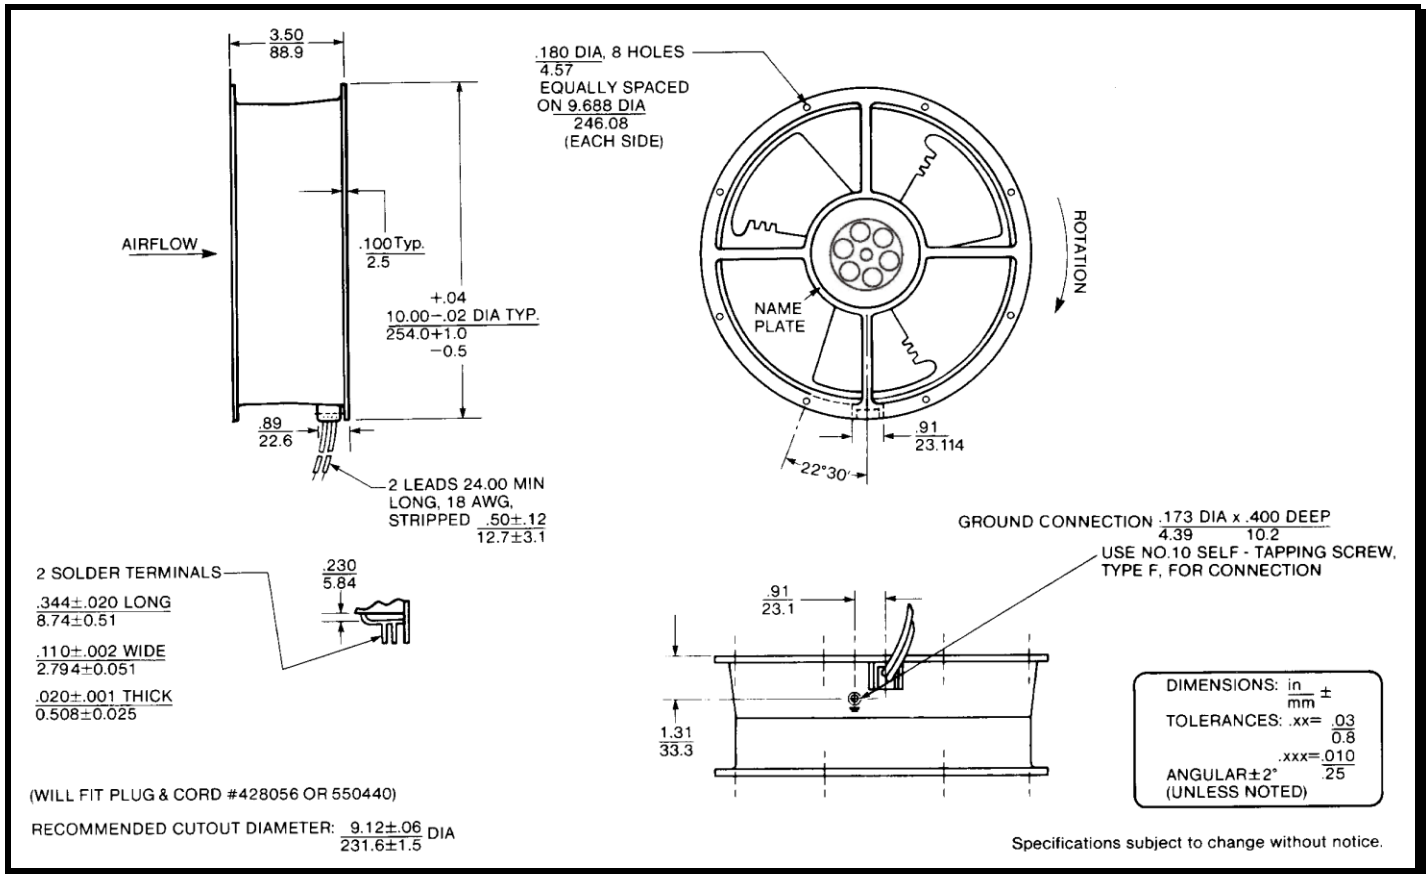

Motor:

Nominal Voltage = 115 Volts AC
Frequency = 50/60 Hz
Nominal Running Current = 0.48/0.50 Amps
Max. Locked Rotor Current = .70 Amps
Running Power = 67/61 Watts
Average Speed = 1400/1650 RPM
Bearings = Ball
Air Flow = 455/550 CFM
Acoustics = 45/49 dBA

Construction:

Venturi: Die-Cast Aluminum, Black.
Propeller: Plastic, Black, UL94V-0.

Life Expectancy:

This fan is designed for continuous duty life of 46,000 hours at 70°C.

Additional Features:

Permanent Split Capacitor Motor
Automatic Reset Thermal Protector
Operating Temperature Range -10°C to 70°C
Storage Temperature Range -40°C to 85°C
Environmental Protection Type I

Termination:

24.0" Harness Assembly, 18AWG UL 1015 leads.
Connector – Molex 39-01-2040
Contacts – Molex 39-00-0059
Grommet – Keystone 744
PIN1: Not use
PIN2: Not use
PIN3: Black
PIN4: Black

Agency Certifications:

UL, CUL, CE

PQ Curve:

