


NOTE:

- THE FLEXIBLE HOSE IS TYPE APPROVED FOR USE IN HIGH PRESSURE CO₂ SYSTEMS UNDER DNV, BV, LR, ABS.
- THE FLEX. HOSE IS DELIVERED W/ STANDARD MANUFACTURER WORK CERTIFICATE. CLASS SOCIETY WORK TEST CERTIFICATE (F/E BV, OTHER) SHOULD BE ORDERED SEPARATELY ON REQUEST.
- THE FLEXIBLE HOSE CONNECTS PRESSURE OPERATED VALVES ON CO₂ CYLINDERS.
- CONNECT THE PILOT HOSE TO VALVE OUTLET WITH A TORQUE OF 20~30 Nm.

TYPE	: FLEXI 2RB, 1/4"
STANDARD	: EN853 1SN
MATERIAL	: INNER TUBE: OIL RESISTANT SYNTHETIC RUBBER, ONE LAYER OF HIGH TENSILE STEEL OUTER COVER: ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER, THE OUTER COVER IS PRICKLED
CONNECTIONS	: COUPLINGS: STEEL 1.0737 / EN10277-3, CHROMATED : SWIVEL MALE COUPLINGS 3/8" BSP WITH CUTTING EDGES
NIPPLE BORE	: 5 MM
BURST PRESSURE	: 900 BAR
TEST PRESSURE	: 338 BAR
WORKING PRESSURE	: 225 BAR
TEMPERATURE	: -40 °C
WEIGHT	: 0.21 KG

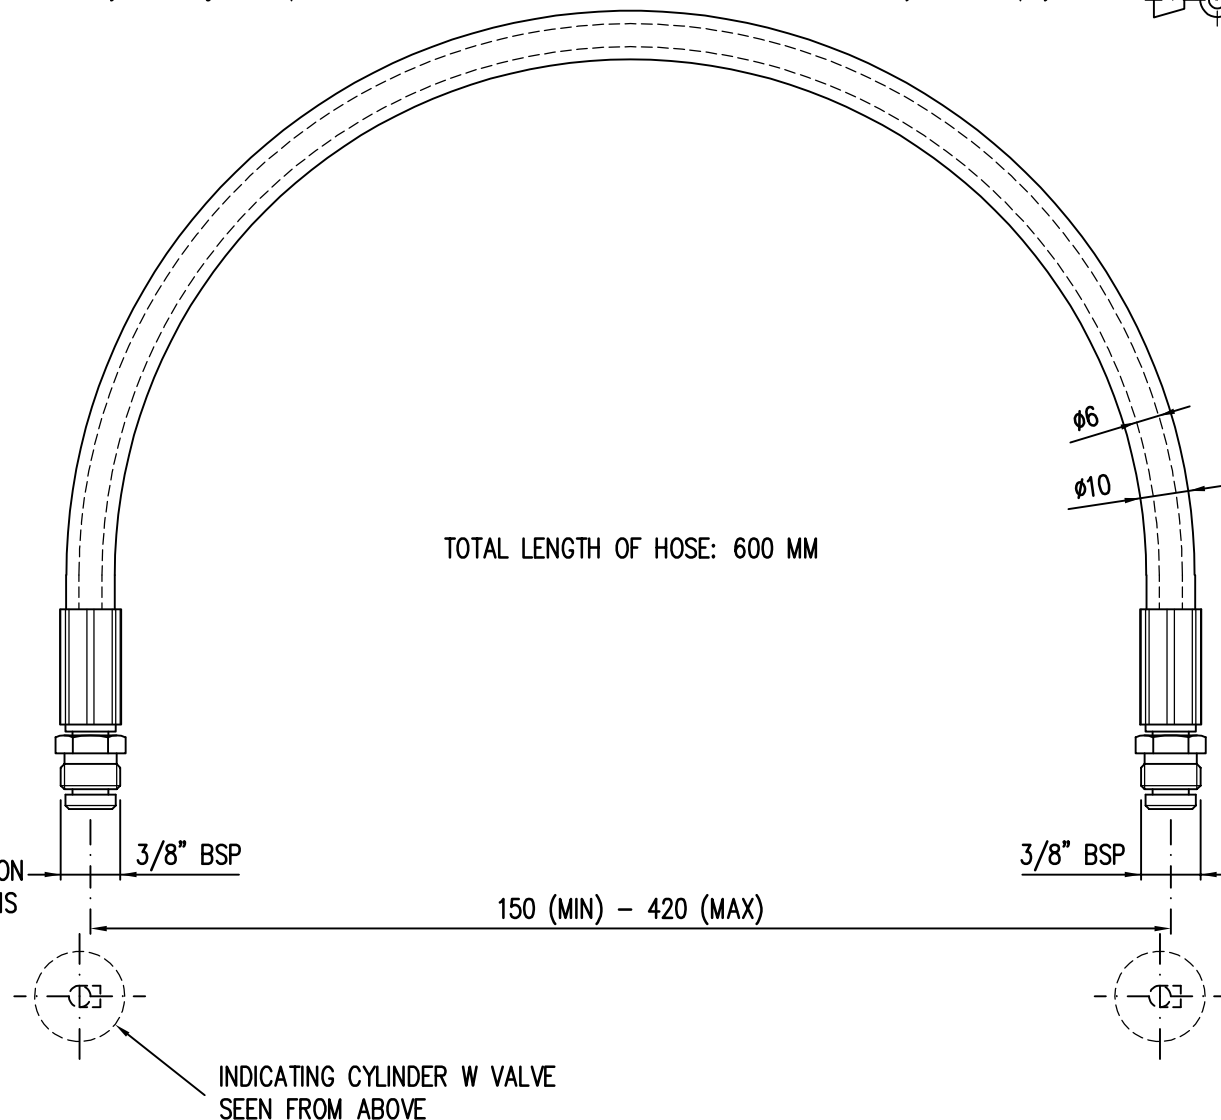

Product no. 1099967	01	Drawn by/date PBU 08.03.22	Drawn by/date PBU 15.10.21	System	Component	DATA SHEET
	Rev. no.	Issued by/date PBU 08.03.22	Issued by/date PBU 15.10.21	SURVITEC HIGH PRESSURE CO ₂ SYSTEM	FLEXIBLE HOSE – PILOT LINE TYPE 6/600, 2RB	Data sheet no.
		Approved by/date RKO 08.03.22	Approved by/date RKO 15.10.21			50-04-033